
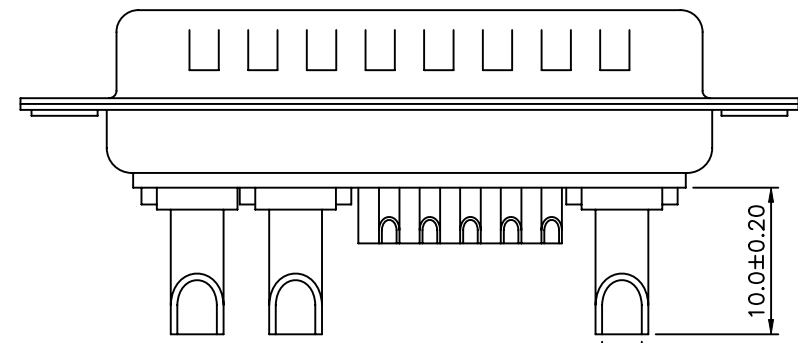
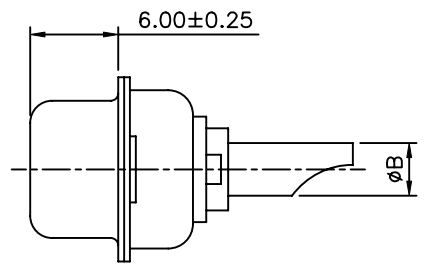


**△ SPECIFICATION**

Current Rating:  
 Signal Contact: 5 Amp  
 Power Contact: 10~40 Amp  
 Contact Resistance: 10 Milliohms Max.  
 Insulation Resistance: 5000 Megaohms Min.  
 Dielectric Withstanding Voltage:  
 1000V AC Per Minute  
 Operation Temperature: -55°C~+125°C  
 Signal Contact: Brass, Gold Flash  
 Power Contact: Brass, Gold Flash  
 Metal Shell: Steel, Tin Plated  
 Insulator: Thermoplastic+30%G.F.(UL94V-0)  
 RoHS Compliant

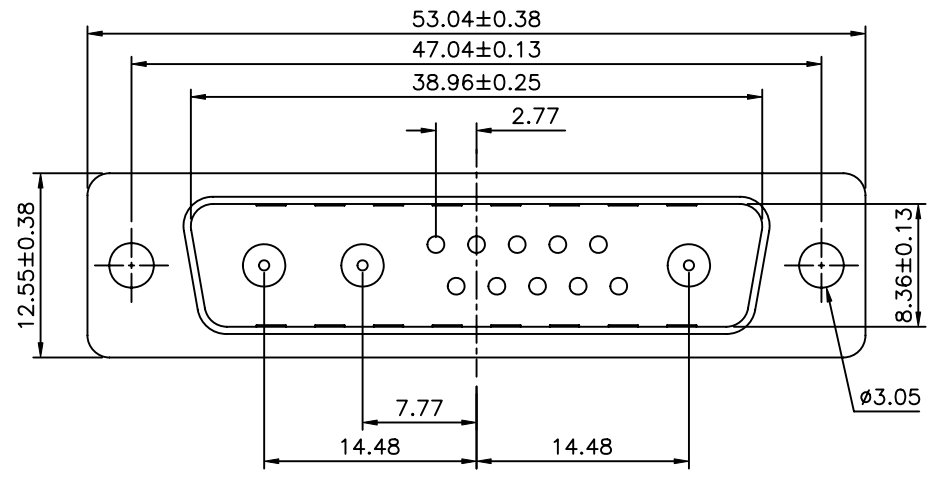

△△	Current Rating	Wire Size	φA	φB
	10 Amps	AWG #16~18	1.7	2.5

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.30 .XX ±0.30 ANG. ±2°
07481		MEI		
		HZF		
		DRAWING BY		UNIT mm
		QQJ		
SCALE	NONE	REV.	A2	

NO.	REV.	REVISIONS	CHK	DATE
△2	A2	Modify Data	HZF	07/21/2010
△1	A1	ADD PART NO.	HZF	05/07/2008
△0	A0	NEW RELEASE	HZF	01/11/2007