
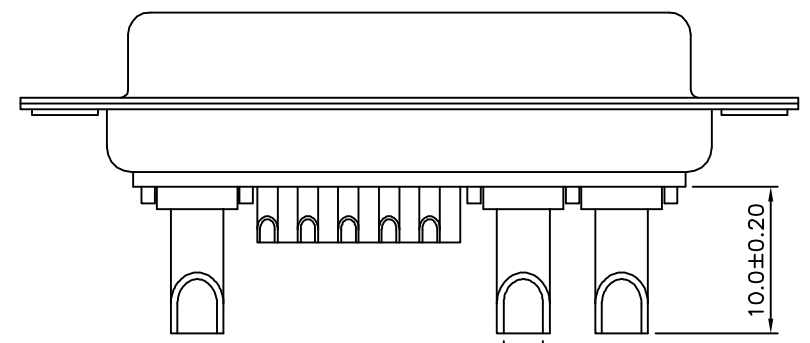
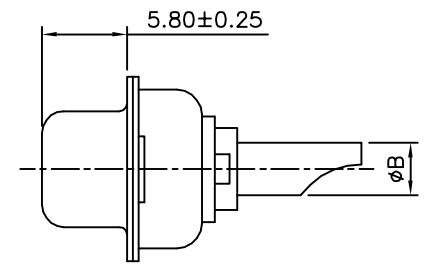


**△△ SPECIFICATION**

Signal Contact Current Rating:5 Amp  
 Power Contact Current Rating:10,20,30,Or 40 Amps  
 Dielectric Withstanding Voltage:1000V AC Per Minute  
 Contact Resistance:10 Milliohms Max.  
 Insulation Resistance:5000 Megaohms Min.  
 Operation Temperature:-55°C~+125°C  
 Insulator:PBT+30%G.F.(UL94V-0)  
 Signal Contact:Brass,Gold Flash Over Nickel  
 Power Contact:Brass,Gold Flash Over Nickel  
 Metal Shell:Steel,Tin Plated  
 RoHS Compliant

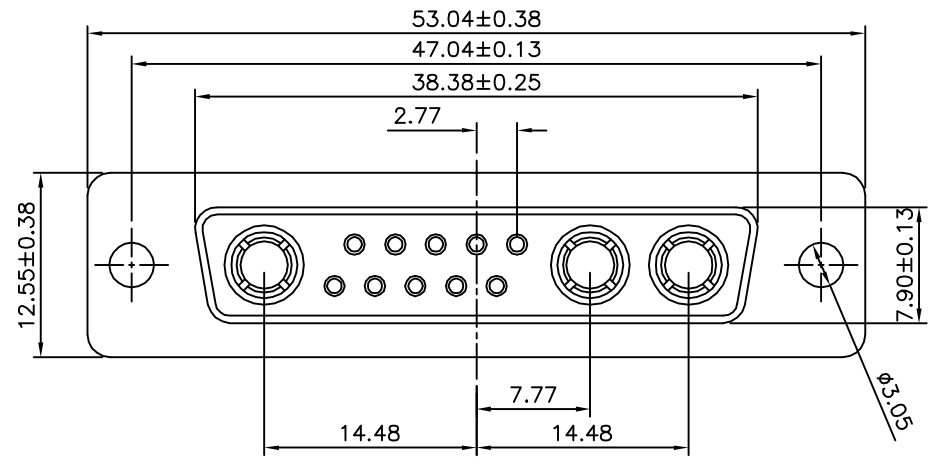

△	Current Rating	Wire Size	φA	φB
	10 Amps	AWG #16~18	1.7	2.5

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.30 .XX ±0.30 ANG. ±2°
07484		MEI		
		HZF		
		DRAWING BY		UNIT mm
		CYP		
SCALE	NONE	REV.	A2	

NO.	REV.	REVISIONS	CHK	DATE
△	A2	Modify Data	HZF	05/20/2016
△	A1	Modify Data	HZF	07/21/2010
△	A0	NEW RELEASE	HZF	01/11/2007