




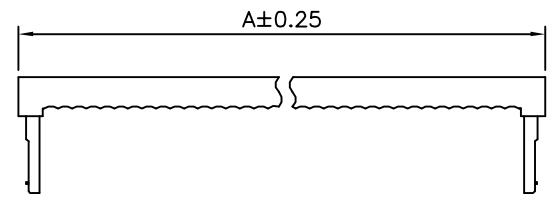

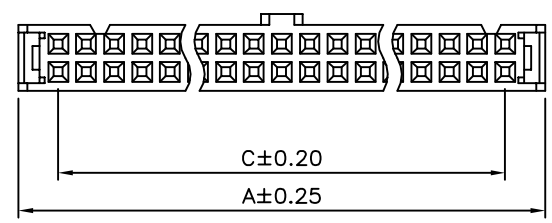


**SPECIFICATION**

Current Rating:1 Amp  
 Withstanding Voltage:500V AC For 1 Minute  
 Insulation Resistance:1000 Megaohms Min. At DC 500V  
 Contact Resistance:15 Milliohms Max.  
 Operation Temperature:-40°C~+105°C  
 Insulator:PBT+30% Glass Fiber(UL94V-0)  
 Contact:Brass,Gold Flash Over Nickel  
 RoHS Compliant



6~8 Pin

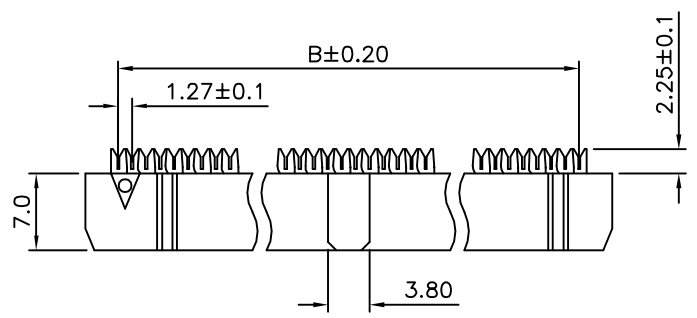

Pos.	A	B	C	D
08	14.86	8.89	7.62	14.66
10	17.40	11.43	10.16	17.20
12	19.94	13.97	12.70	19.74
14	22.48	16.51	15.24	22.28
16	25.02	19.05	17.78	24.82
18	27.56	21.59	20.32	27.36
20	30.10	24.13	22.86	29.90
24	35.18	29.21	27.94	34.98
26	37.72	31.75	30.48	37.52
30	42.80	36.83	35.56	42.80
34	47.88	41.91	40.64	47.68
36	50.42	44.45	43.18	50.22
40	55.50	49.53	48.26	55.30
44	60.58	54.61	53.34	60.38
50	68.20	62.23	60.96	68.40
60	80.90	74.93	73.66	80.70
64	85.98	80.01	78.74	85.78

**4UCON**

元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.  
 07589

APPROVED BY MEI  
 CHECKED BY HZF  
 DRAWING BY LXX  
 REV. A1

UNLESS OTHERWISE SPECIFIED  
 TOLERANCES ARE  
 X. ±0.20  
 .X ±0.10  
 .XX ±0.05  
 .XXX ±0.02  
 UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△A1		Modify 603--->034	HZF	12/16/2009
△A0		NEW RELEASE	HZF	05/13/2008