

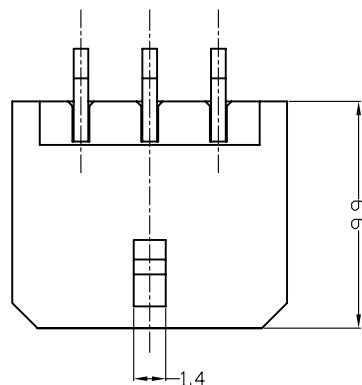





2 PIN

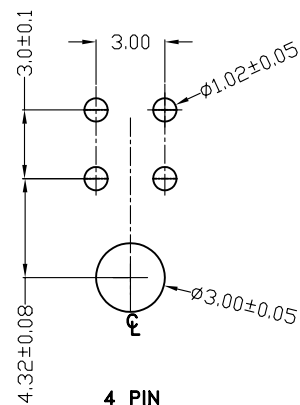

4 PIN

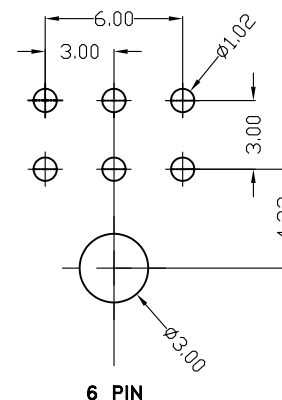

6 PIN

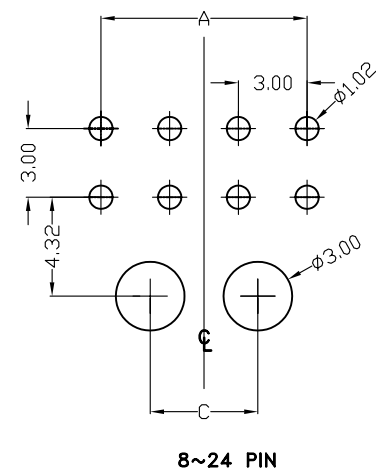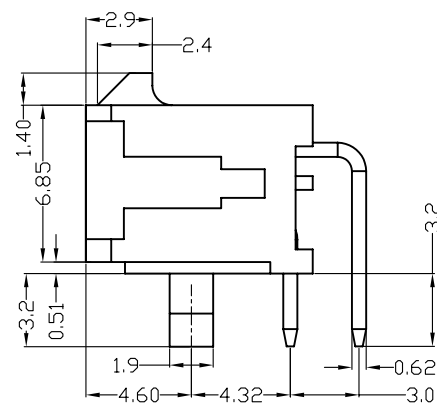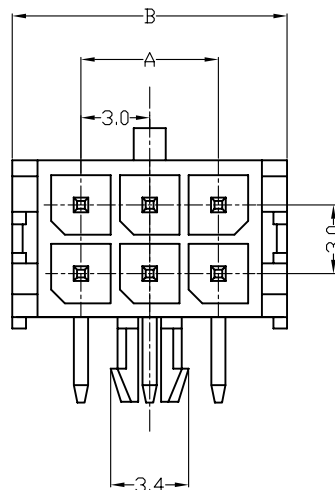

8~24 PIN

PCB LAYOUT
RECOMMEND PCB THICKNESS:1.57 mm

Specification

- Current Rating: 5A AC/DC
- Voltage Rating: 250V AC
- Temperature Range: -25°C~+85°C
- Contact Resistance: 50m ohms Max
- Insulator Resistance: 1000M ohms Min
- ⚠ Dielectrical Withstanding Voltage: 1500V AC /Minute
- Contact : Copper Alloy, Tin Plated
- Insulator Material: PBT, UL94V-0 ,Color: Black
- RoHS Compliant

Position	Dim A	Dim B	Dim C
2	— —	6.0	— —
4	3.00	9.0	— —
6	6.00	12.0	— —
8	9.00	15.0	4.70
10	12.00	18.0	7.70
12	15.00	21.0	10.70
14	18.00	24.0	13.70
16	21.00	27.0	16.70
18	24.00	30.0	19.70
20	27.00	33.0	22.70
22	30.00	36.0	25.70
24	33.00	39.0	28.70

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

07787

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

LHC

DRAWING BY

TONY

REV.

A1

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

.X ±0.38

.XX ±0.25

ANG.

UNIT

mm



NO. REV.

A1

MODIFY DWV

TONY

09/21/2006

NEW RELEASE

TONY

03/28/2005

REVISIONS

CHK

DATE