
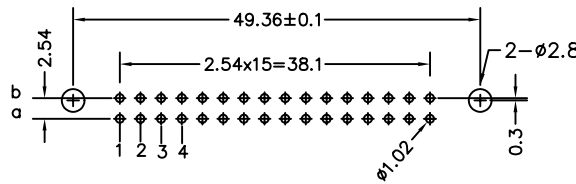
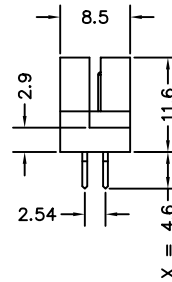


Detail P

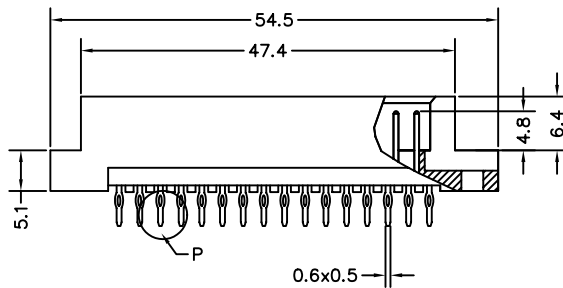

P.C.Board Layout

SPECIFICATIONS

Current Rating : 2AMP

Dielectric Withstanding Voltage : AC 1000V for 1 minute

Insulator Resistance : 1000megohms min at DC 500V

Contact Resistance : 30megohms max at DC 100mA

Operating Temperature : -55°c to +105°c

Housing : 30% Glass filled PBT UL94V-0

Contacts : Brass

Pitch	x length position	1		2		W1		W2	
		4.6	6.3	13	17	13	17	13	17
2.54mm	32	a	b	b		a		b	
	16	a	-	b		a		b	
5.08mm	8	a	b	b		a		b	
	16	a	-	b		a		b	

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.
07804

APPROVED BY
MEI
CHECKED BY
RAN
DRAWING BY
HZF

UNLESS OTHERWISE SPECIFIED
TOLERANCES ARE
.X ±0.38
.XX ±0.25
ANG.

SCALE NONE

REV. A

UNIT mm

AREA

REVISIONS

CHK

DATE