
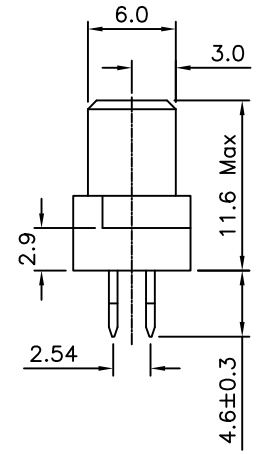
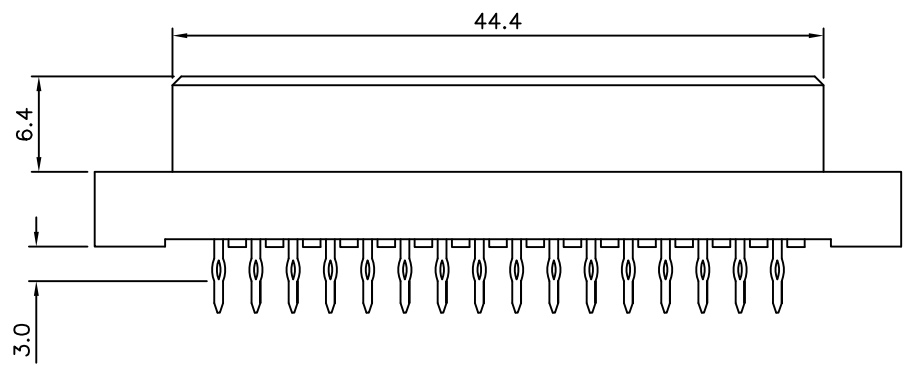


SPECIFICATIONS
 Current Rating: 2 Amp
 Dielectric Withstanding Voltage: 1000V AC For 1 Minute
 Insulator Resistance: 1000 Megohms At DC 500V
 Contact Resistance: 30 Milliohms At DC 100mA
 Operating Temperature: -55°C ~ +105°C
 Contacts: Phosphor Bronze
 Housing: 30% Glass Filled PBT UL94V-0

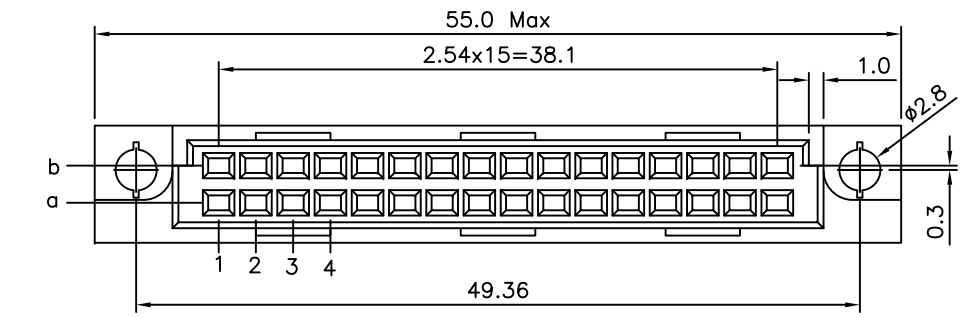

AUK P/N	Contact	Rows With Contact	Position	Pitch
HUB2X16SP		a b	32	2.54mm
HUB1X16SP		a -	16	

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.5 .X ±0.25 .XX ±0.15
07806		MEI		
		CHECKED BY		
		HZF		
		DRAWING BY		
		PEGA		
SCALE	NONE	REV.	A0	UNIT
				mm

△ A0	NEW RELEASE	HZF	05/09/2007
NO. REV.	REVISIONS	CHK	DATE