
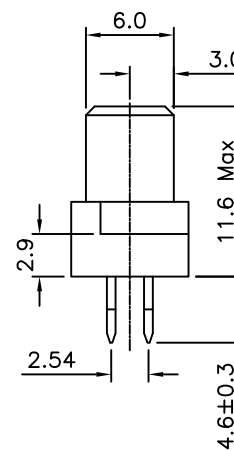
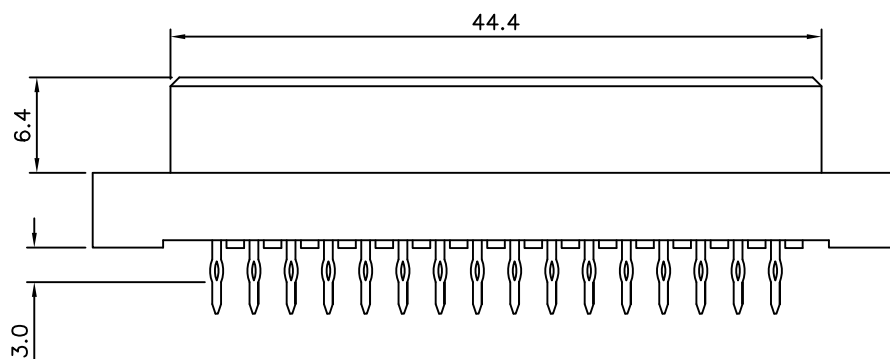
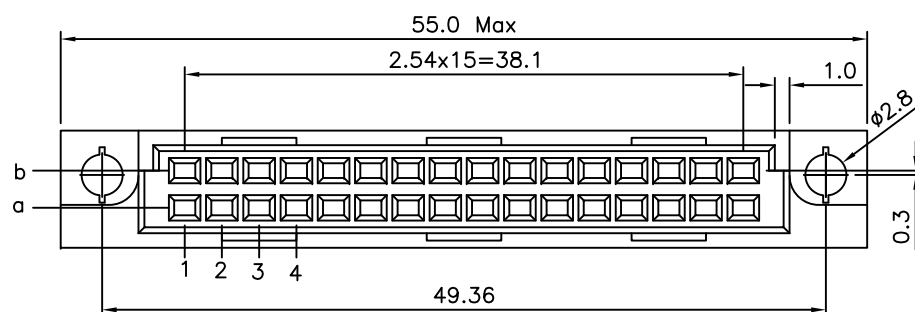


SPECIFICATIONS

Current Rating:2 Amp
 Dielectric Withstanding Voltage:1000V AC For 1 Minute
 Insulator Resistance:1000Megohms At DC 500V
 Contact Resistance:30Milliohms At DC 100mA
 Operating Temperature:-55°C~+105°C
 Contacts:Phosphor Bronze
 Housing:30% Glass Filled PBT UL94V-0

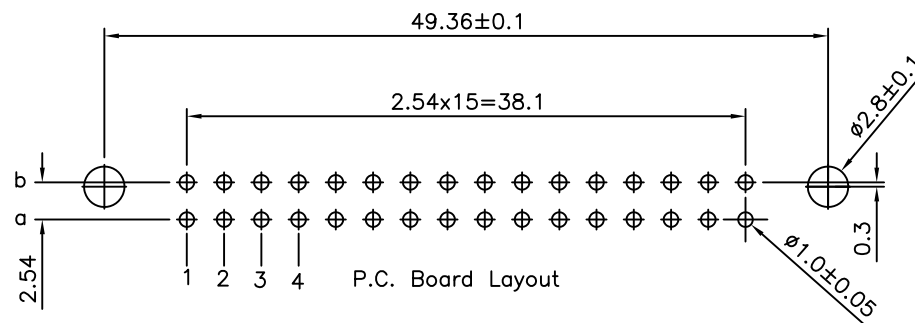

AUK P/N	Contact	Rows With Contact	Position	Pitch
HUB2X16SP		a b	32	2.54mm
HUB1X16SP		a -	16	

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

07807

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

PEGA

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 X. ±0.5
 .X ±0.25
 .XX ±0.15

SCALE

NONE

REV.

A0

UNIT
mm



NO. REV.

NEW RELEASE

REVISIONS

CHK

DATE

△ A0

NEW RELEASE

REVISIONS

CHK

DATE

NO. REV.

REVISIONS

CHK

DATE