

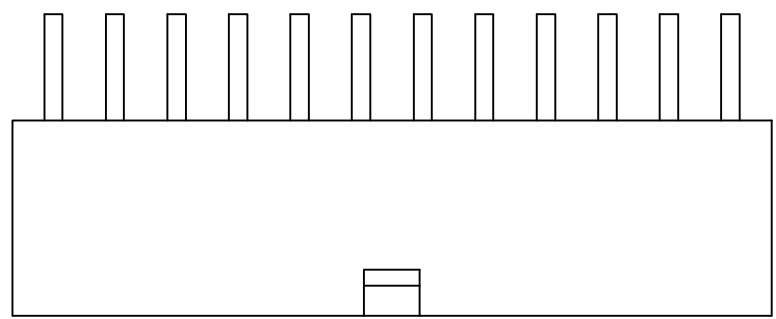
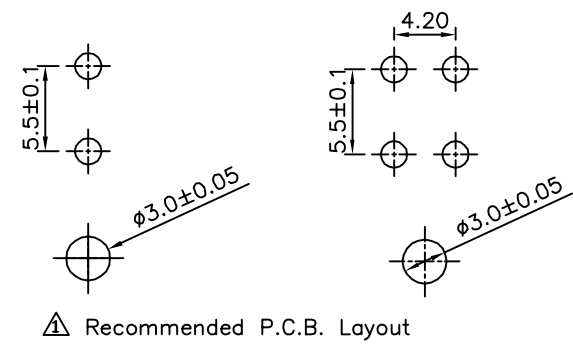


△ SPECIFICATION
 Current Rating:8A AC/DC
 Voltage Rating:500V AC/DC
 Withstand Voltage:1500V AC/Minute
 Insulation Resistance:1000 Megaohms Min.
 Temperature Range:-25°C~+85°C
 Insulator:PA66(UL94V-2),Nature
 Contact:Brass,Tin Plated
 Applicable PC Board Thickness:1.6mm
 RoHS Compliant

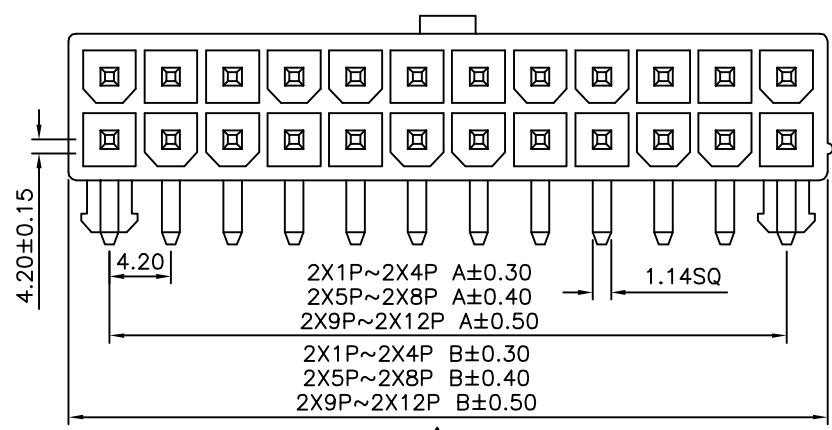

△ 2X3Pin~2X12Pin

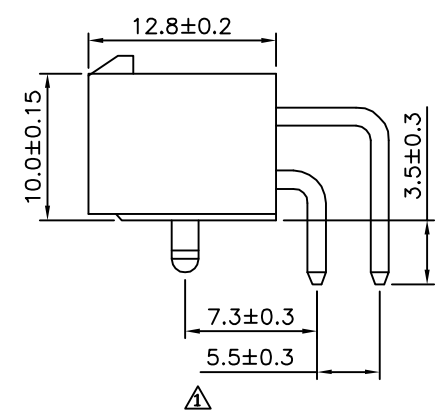

△

Pin	A	B
02		5.4
04	4.20	9.6
06	8.40	13.8
08	12.60	18.0
10	16.80	22.2
12	21.00	26.4
14	25.20	30.6
16	29.40	34.8
18	33.60	39.0
20	37.80	43.2
22	42.00	47.4
24	46.20	51.6

4U CON 元化興業股份有限公司
 4U CON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.5 X ±0.25 .XX ±0.2 .XXX ±0.08
07810		EMILY		
		CHECKED BY		
		HZF		
		DRAWING BY		
		HAO		
SCALE	NONE	REV.	A1	UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△ A1		Modify Data	HZF	11/25/2014
△ A0		NEW RELEASE		