

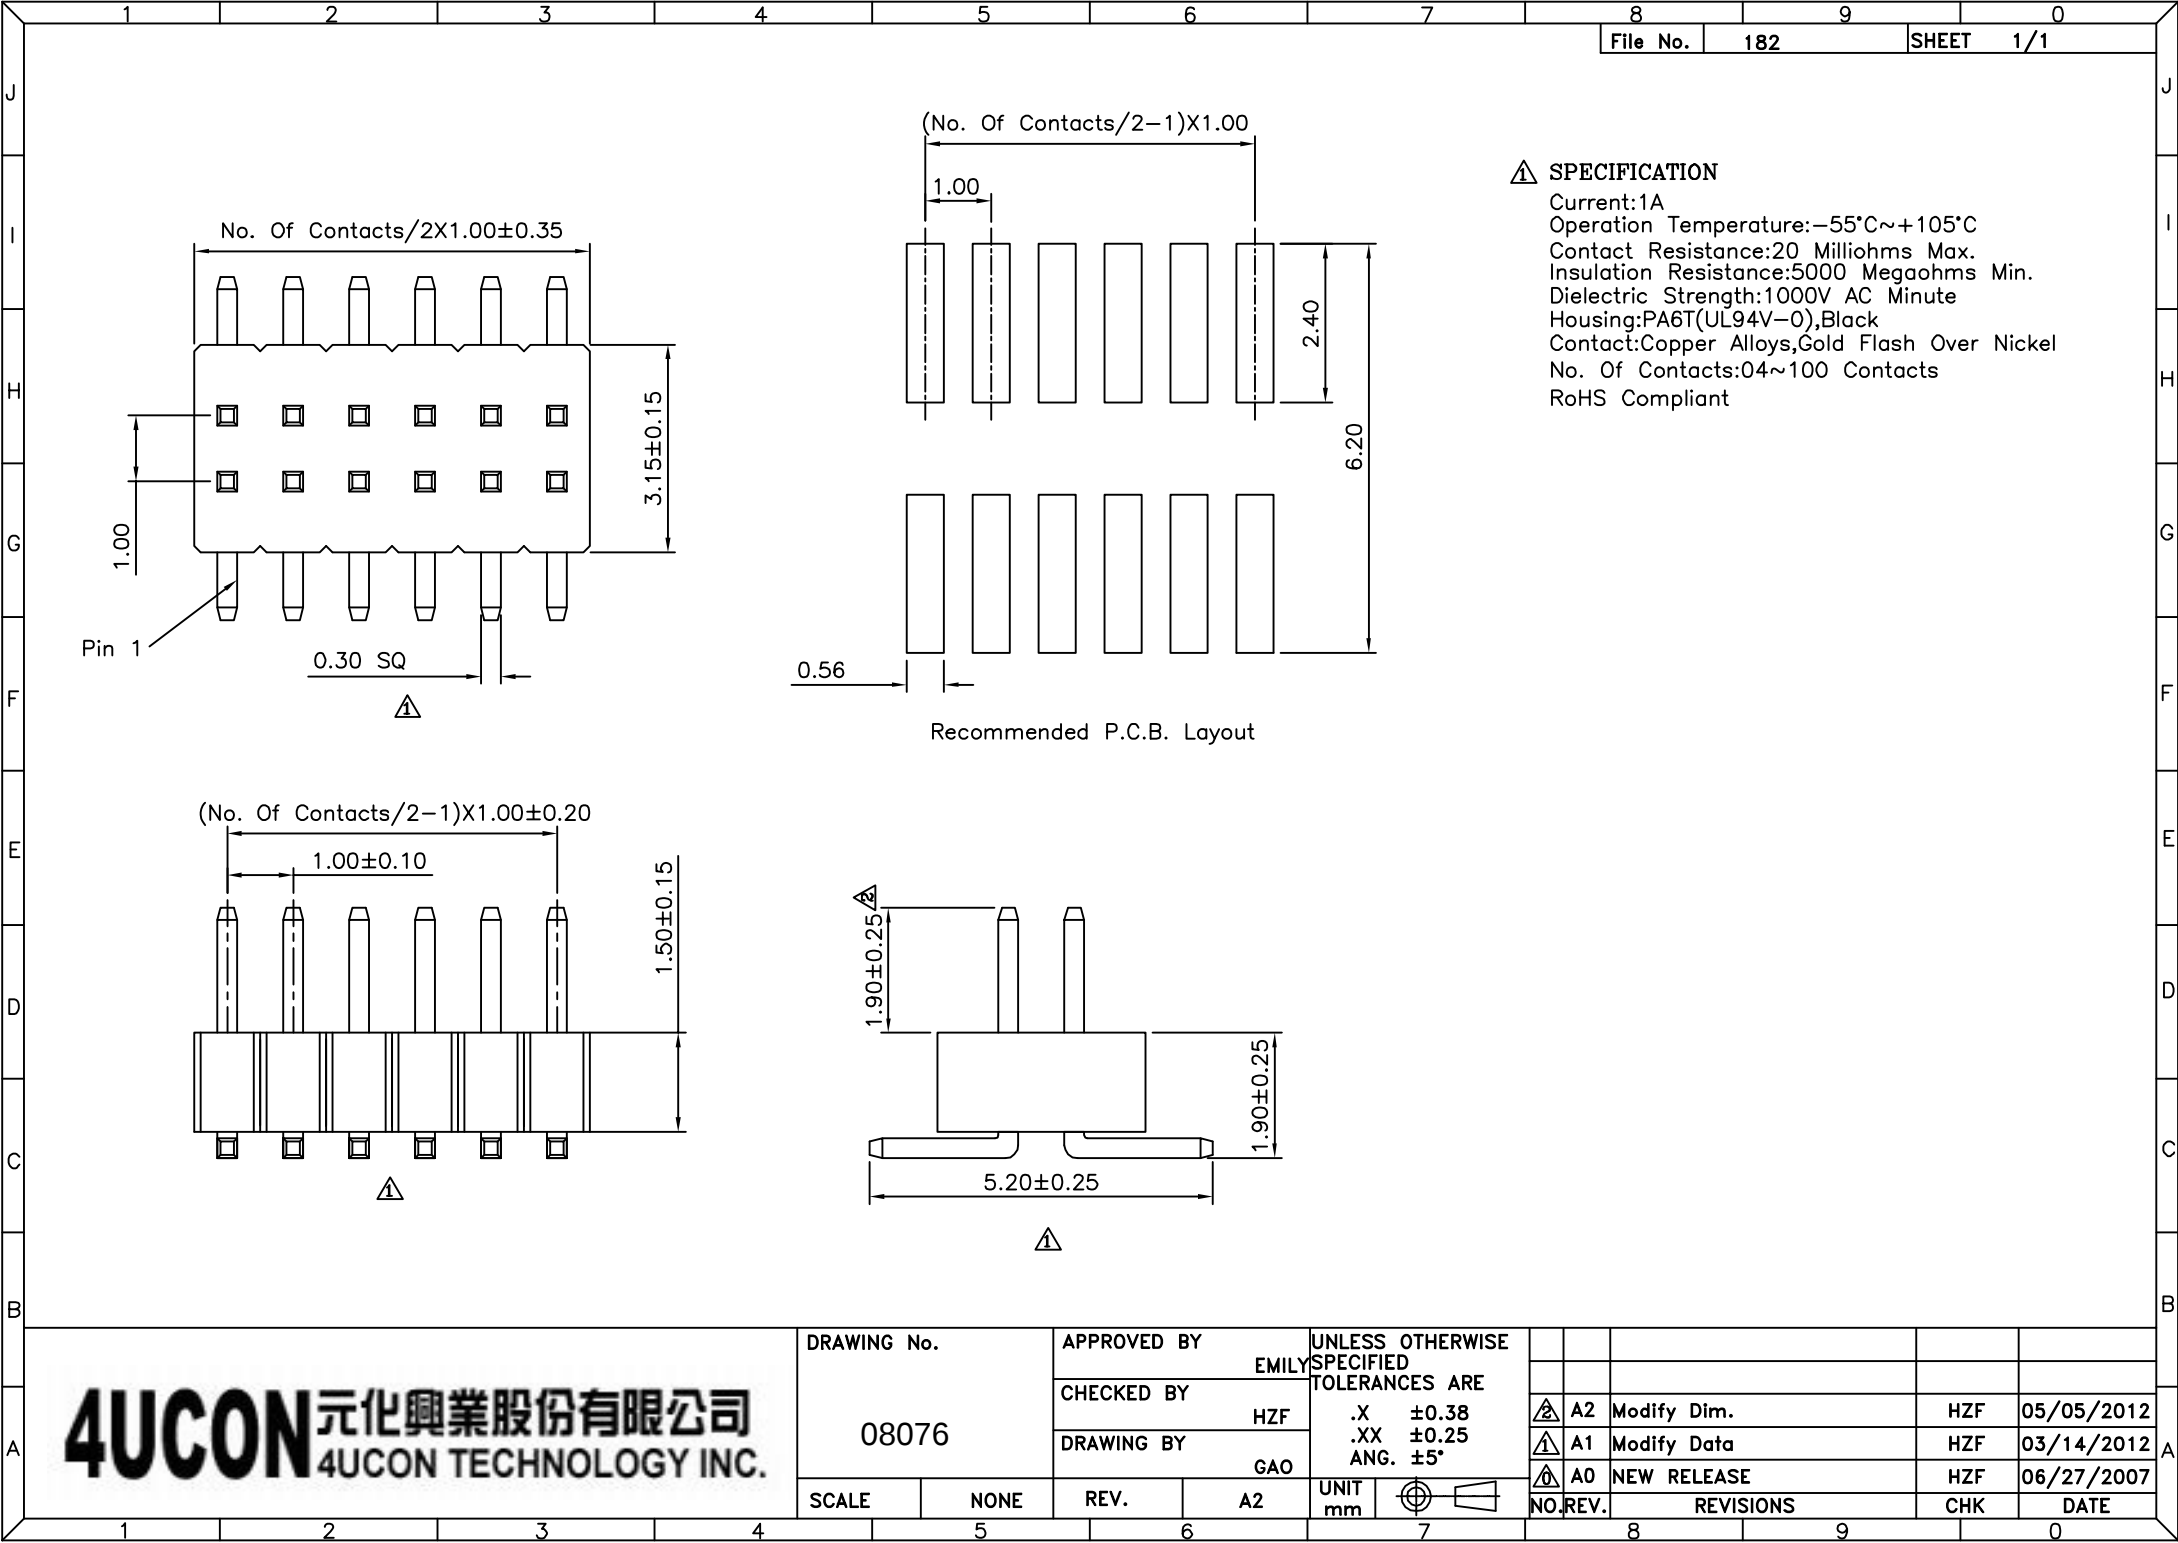
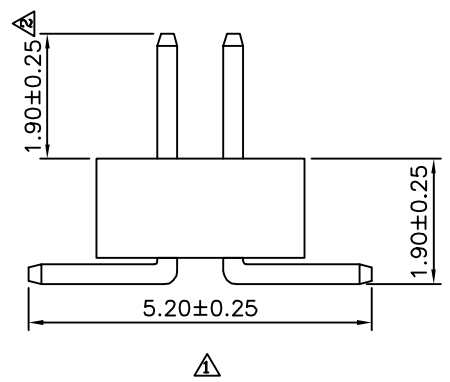
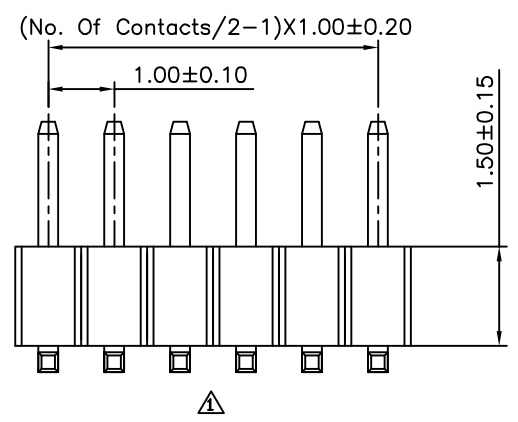


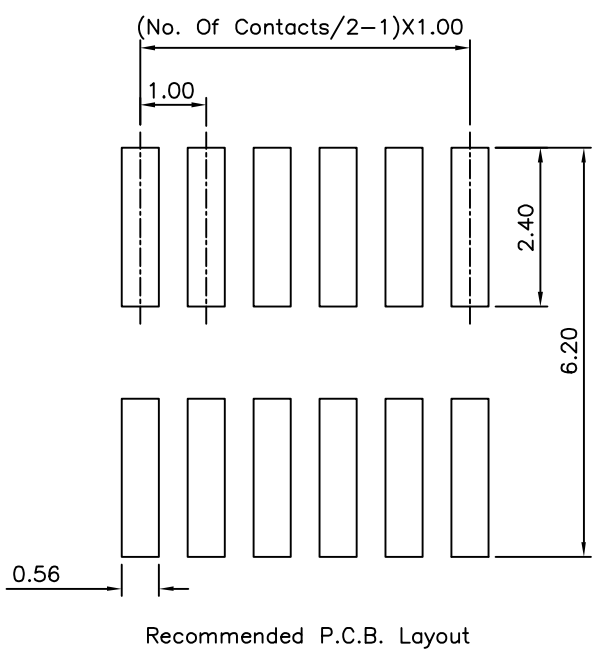

△ SPECIFICATION
Current:1A
Operation Temperature:-55°C~+105°C
Contact Resistance:20 Milliohms Max.
Insulation Resistance:5000 Megaohms Min.
Dielectric Strength:1000V AC Minute
Housing:PA6T(UL94V-0),Black
Contact:Copper Alloys,Gold Flash Over Nickel
No. Of Contacts:04~100 Contacts
RoHS Compliant

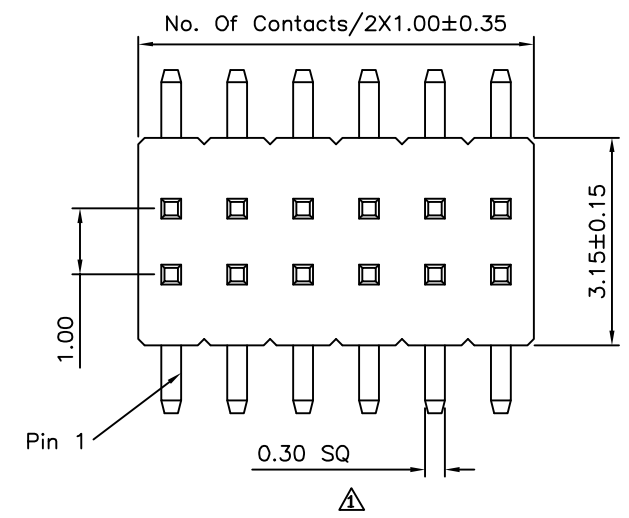

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE					
08076		EMILY		.X ±0.38		△ A2	Modify Dim.	HZF	05/05/2012
		CHECKED BY		.XX ±0.25		△ A1	Modify Data	HZF	03/14/2012
		DRAWING BY		ANG. ±5°		△ A0	NEW RELEASE	HZF	06/27/2007
SCALE		NONE		REV.		NO. REV.	REVISIONS	CHK	DATE
				A2					