
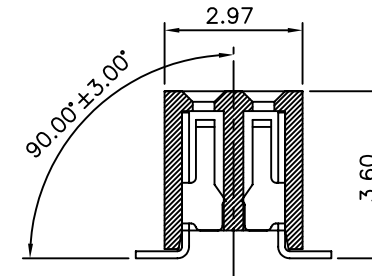
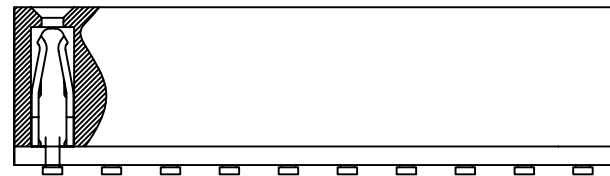
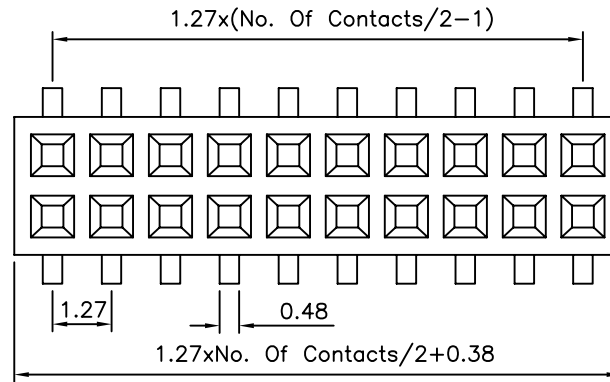


**SPECIFICATIONS**

Current Rating:1 Amp  
 Insulator Resistance:5000 Megohms Min.  
 Dielectric Withstanding:AC 500V  
 Operating Temperature:-40°C~+105°C  
 Max. Processing Temp.:230°C For 30~60 Seconds  
 (260°C For 10 Seconds)  
 Contact:Phosphor Bronze  
 Housing:LCP(UL 94V-0)

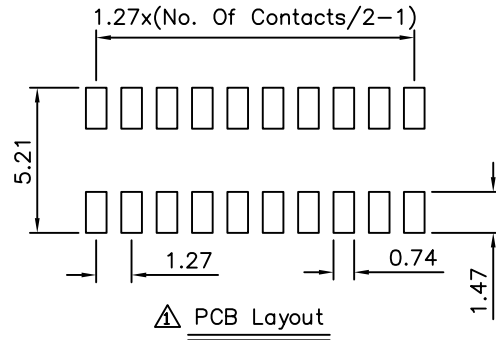

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.  
 08329

APPROVED BY  
 MEI  
 CHECKED BY  
 BECKY  
 DRAWING BY  
 HZF

UNLESS OTHERWISE SPECIFIED  
 TOLERANCES ARE  
 .X ±0.15  
 .XX ±0.10  
 .XXX ±0.05

SCALE NONE

REV. A1

UNIT mm

NO. REV.

REVISIONS

CHK DATE

△ A1	Modify PCB Layout	BECKY	04/11/2006
△ A0	NEW RELEASE	BECKY	04/06/2005