
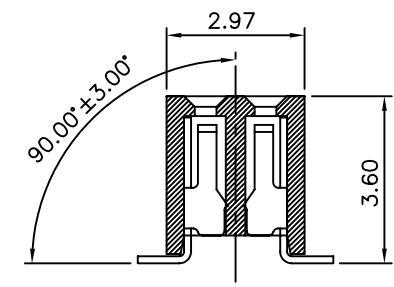
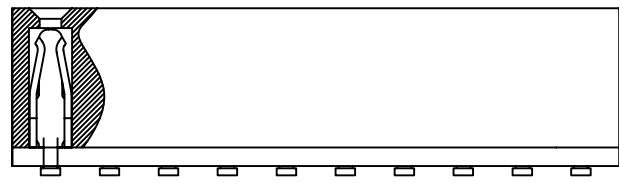
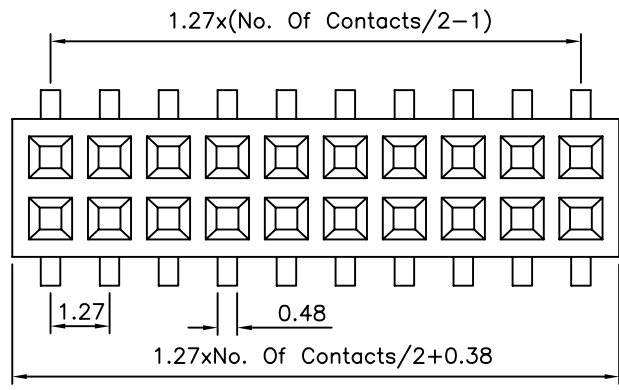


SPECIFICATIONS
 Current Rating: 1 Amp
 Insulator Resistance: 5000 Megohms Min.
 Dielectric Withstanding: AC 500V
 Operating Temperature: -40°C ~ +105°C
 Max. Processing Temp.: 230°C For 30~60 Seconds
 (260°C For 10 Seconds)
 Contact: Phosphor Bronze
 Housing: LCP (UL 94V-0)

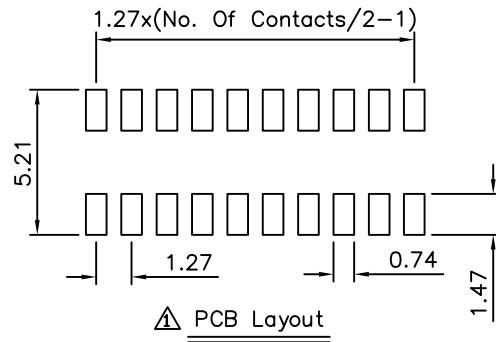

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.15 .XX ±0.10 .XXX ±0.05					
08349		MEI							
		CHECKED BY							
		BECKY							
		DRAWING BY							
		HZF							
SCALE	NONE	REV.	A1	UNIT	mm				
						NO. REV.	REVISIONS	CHK	DATE
						△ A1	Modify PCB Layout	BECKY	04/11/2006
						△ A0	NEW RELEASE	BECKY	04/06/2005