



Recommended P.C.B. Layout


- △△ SPECIFICATION**
 Current Rating:0.5 Amp
 Withstand Voltage:500V AC
 Contact Resistance:35 Milliohms Max.
 Insulation Resistance:>500 Megaohms Min.
 Operation Temperature:-55°C~+85°C
 Insulator:PBT(UL94V-0),Black
 △ Contact:Phosphor Bronze,Selective Gold Plated 5u" Over Nickel
 Front Shell:Steel,Nickel Plated Over Copper
 △ Bracket:Zinc Alloy,Nickel Plated Over Copper
 RoHS Compliant

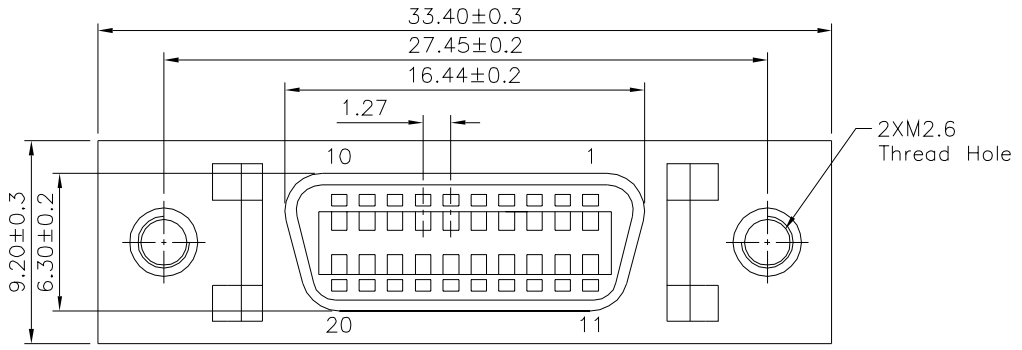

△△

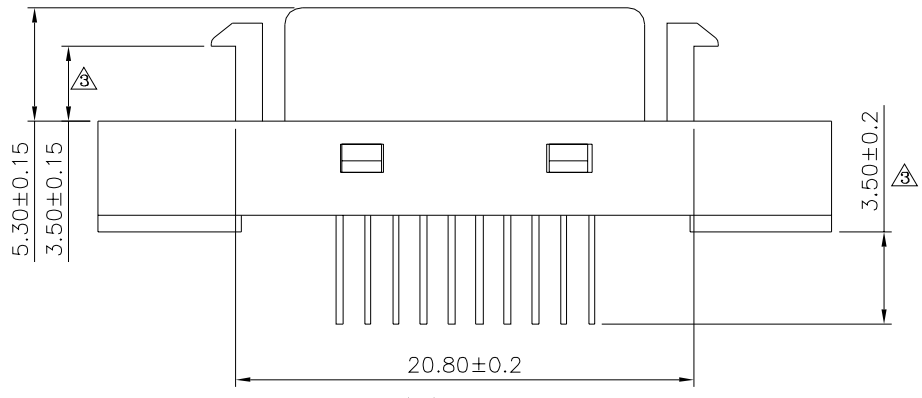

△△

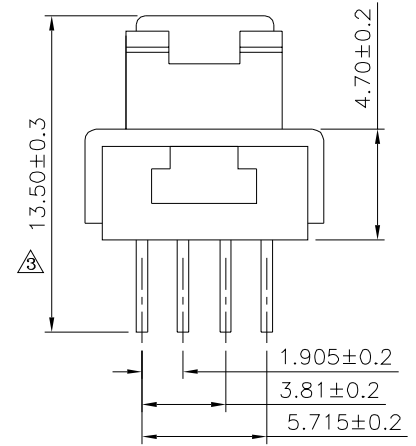

△△

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No. 08746		APPROVED BY EMILY	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.38 .XX ±0.25 ANG
		CHECKED BY HZF	
		DRAWING BY SONG	
SCALE NONE	REV. A3	UNIT mm	

NO.	REV.	REVISIONS	CHK	DATE
△3	A3	Modify Data	HZF	09/24/2013
△2	A2	Modify Data	HZF	10/21/2011
△1	A1	Modify Data	HZF	11/19/2009
△0	A0	NEW RELEASE		