

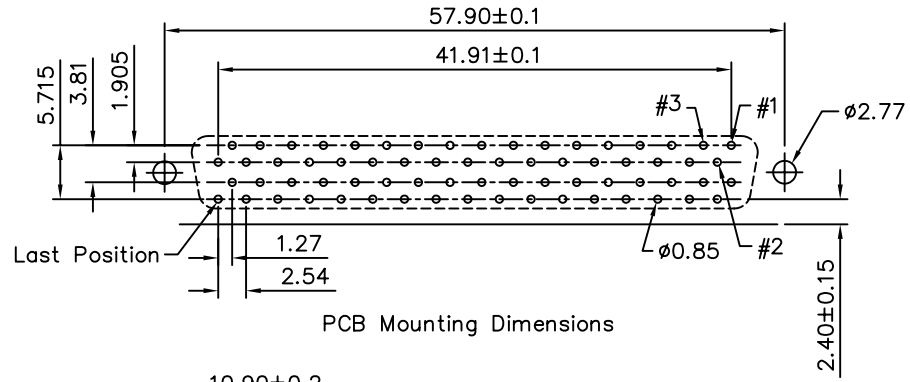
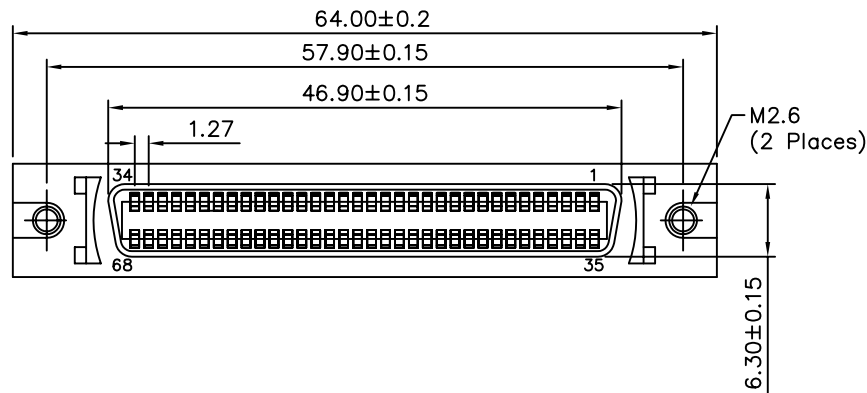


SPECIFICATIONS

Current Rating: 1 Amp
 Insulation Resistance: 500 Megohms Min.
 Withstanding Voltage: 500V AC Min.
 Contact Resistance: 35 Milliohms Max.
 Temperature Range: -55°C To +105°C
 Housing: Plastic Thermoplastic P.B.T
 UL 94V-0, Black
 Contact: Phosphor Bronze, Selective Gold Plated
 Bracketshell: Die-Cast Zinc Nickel Plated
 Over Copper

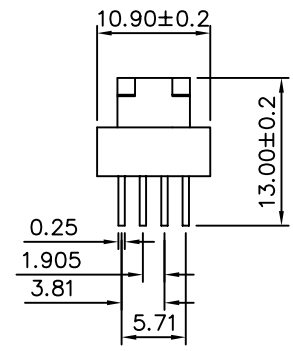

PCB Mounting Dimensions

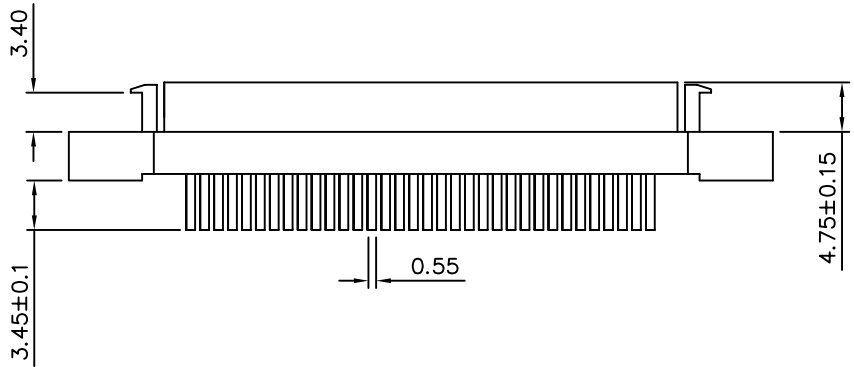

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.38 .XX ±0.25 ANG.
2622EH7EX06		MEI		
		CHECKED BY		
		BECKY		
		DRAWING BY		
		HZF		
SCALE	NONE	REV.	A1	UNIT
				mm

NO.	REV.	REVISIONS	CHK	DATE
△ A1		Modify Data	BECKY	05/25/2005
△ A		NEW RELEASE	RAN	10/31/2003