

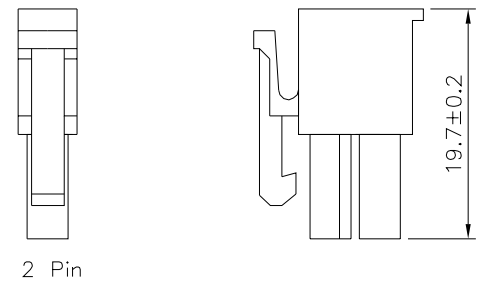





**SPECIFICATION**  
 Current Rating:8A AC,DC  
 Voltage Rating:500V AC,DC  
 Withstand Voltage:1500V AC/Minute  
 Insulation Resistance:1000 Megaohms Min.  
 Operation Temperature:-25°C~+105°C  
 ⚠ Insulator:PA66  
 RoHS Compliant

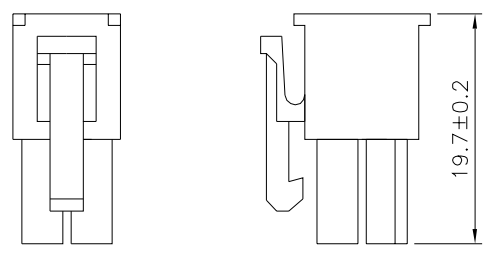


2 Pin

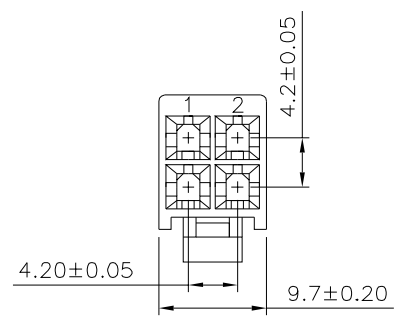

4 Pin

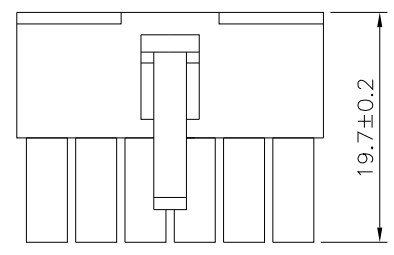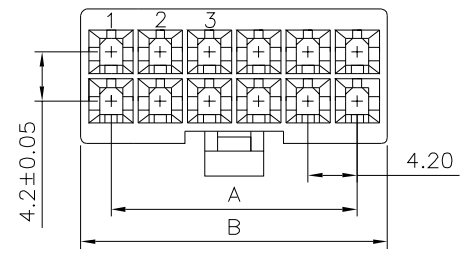

06~24 Pin

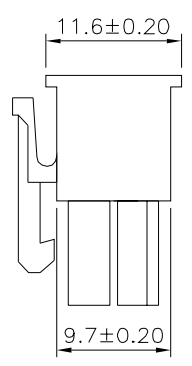

Pin	A		B	
02	—		5.5	
04	4.20	±0.20	9.7	±0.30
06	8.40		13.9	
08	12.60		18.1	
10	16.80	±0.30	22.3	±0.40
12	21.00		26.5	
14	25.20		30.7	
16	29.40	±0.40	34.9	±0.50
18	33.60		39.1	
20	37.80		43.3	
22	42.00		47.5	
24	46.20		51.7	

PS. Flame Retardant & Insulator Color:  
 UL94V-2 Nature Color  
 UL94V-0 White Color  
 UL94V-2 Black Color

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No. ⚠ 09019

APPROVED BY MEI  
 CHECKED BY HZF  
 DRAWING BY CYP

SCALE NONE REV. B1

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE  
 .X ±0.30  
 .XX ±0.20  
 .XXX ±0.10  
 ANG.

UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
⚠	B1	Modify Data	HZF	12/27/2018
⚠	B0	NEW RELEASE	HZF	07/08/2014