
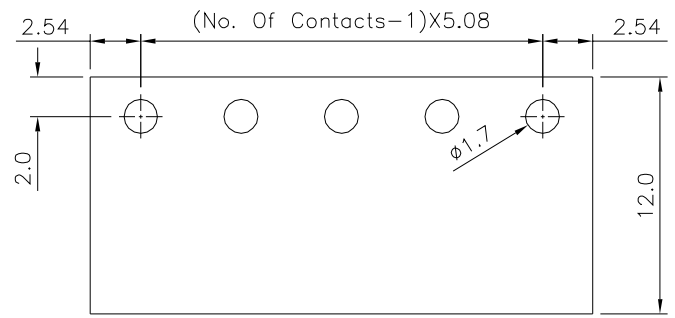


△ SPECIFICATION  
 Voltage Rating: 300V AC  
 Current Rating: 16A  
 Withstanding Voltage: AC 2500V (1 Minute)  
 Using Temperature Range: -40°C ~ +105°C  
 Soldering Temperature: +250°, 5 Seconds Max.  
 Solder Pin: Copper Alloy, Tin Plated  
 △ Insulator Body (Housing): Polyamide + G.F. (UL94V-0), Green  
 RoHS Compliant  
 \* 02~24P Available

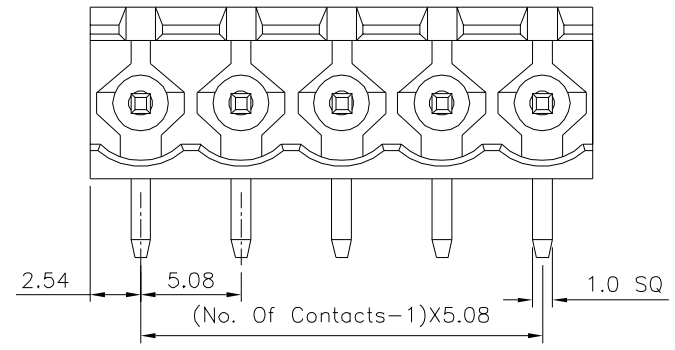

Recommended P.C.B. Layout

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No. 3/2/1  
 09083

APPROVED BY MEI  
 CHECKED BY HZF  
 DRAWING BY HTP  
 REV. A3

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE  
 X. ±0.50  
 .X ±0.30  
 .XX ±0.20  
 ANG. ±1°  
 UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
3	A3	Modify Data	HZF	11/04/2019
2	A2	Modify Data	HZF	08/08/2014
1	A1	Modify Data	HZF	02/17/2012
0	A0	NEW RELEASE	HZF	04/10/2009