

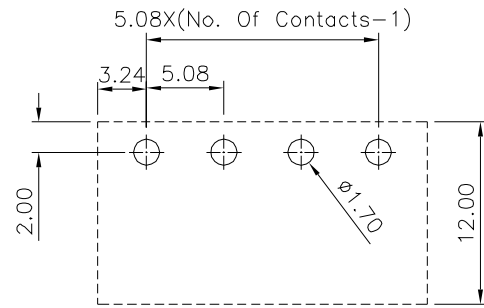
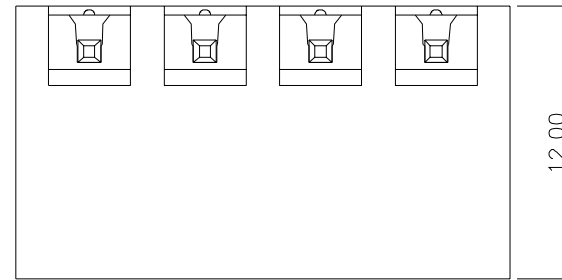


SPECIFICATION

Current Rating:15 Amp
 Voltage Rating:300V AC
 Withstanding Voltage:1600V(1 Minute)
 Operation Temperature:-40°C~+105°C
 Insulator:PA66(UL94V-0),Green
 Contact:Copper Alloy,Tin Plated
 RoHS Compliant
 * 02~24P Available~

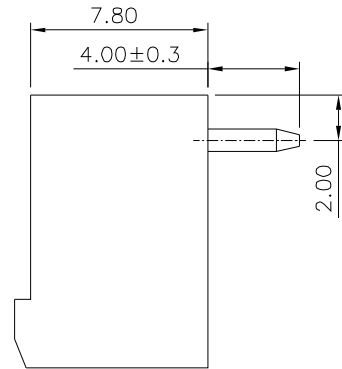

PCB Layout

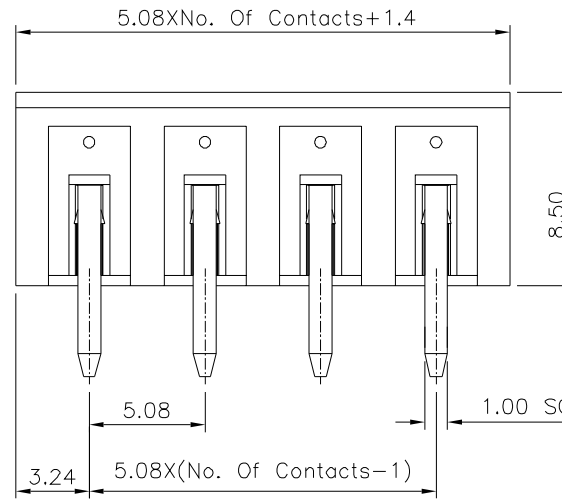

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

09085

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

SONG

SCALE

NONE


REV.

A0

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

0<L≤6 ±0.20
 6<L≤10 ±0.30
 10<L≤30 ±0.50
 30<L≤60 ±0.70
 60<L≤100 ±1.00
 100<L≤160 ±1.30

UNIT mm



NO. REV.

A0 NEW RELEASE

REVISIONS

CHK

HZF 08/05/2024

DATE