


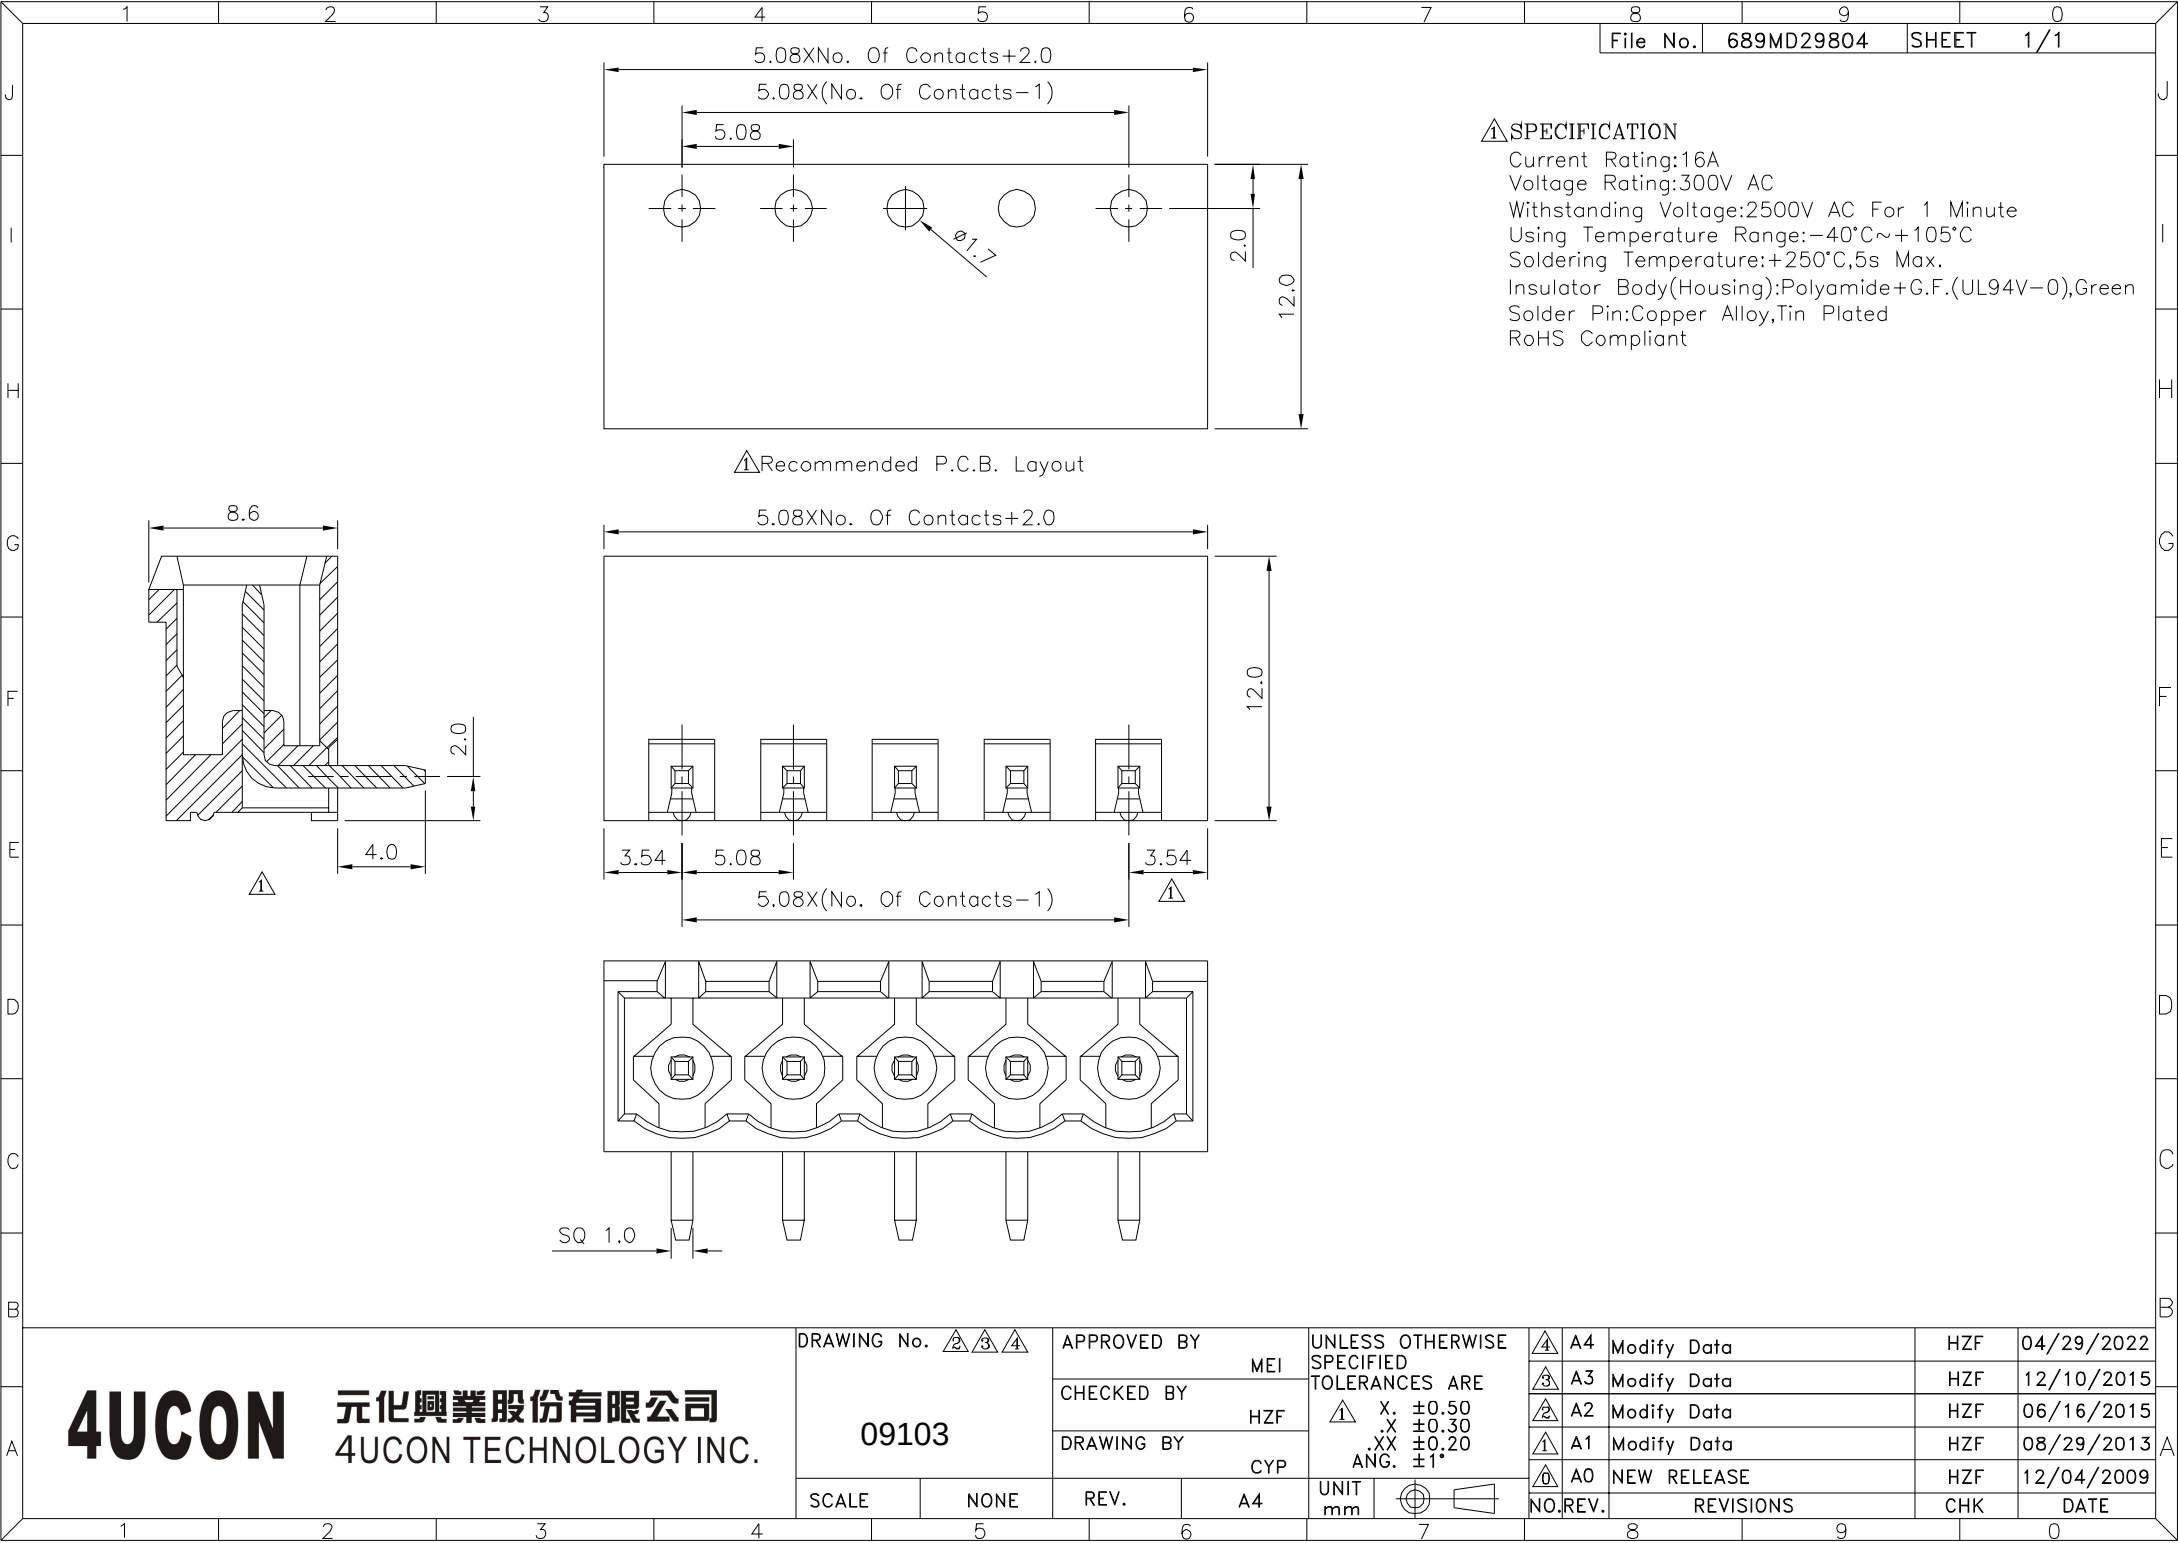

△ SPECIFICATION
Current Rating:16A
Voltage Rating:300V AC
Withstanding Voltage:2500V AC For 1 Minute
Using Temperature Range:−40°C~+105°C
Soldering Temperature:+250°C,5s Max.
Insulator Body(Housing):Polyamide+G.F.(UL94V−0),Green
Solder Pin:Copper Alloy,Tin Plated
RoHS Compliant

△ Recommended P.C.B. Layout