
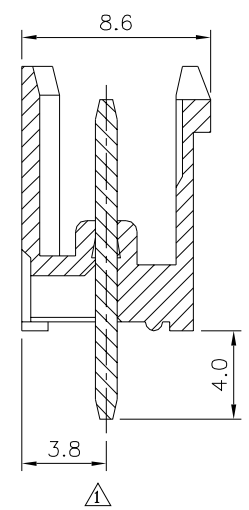
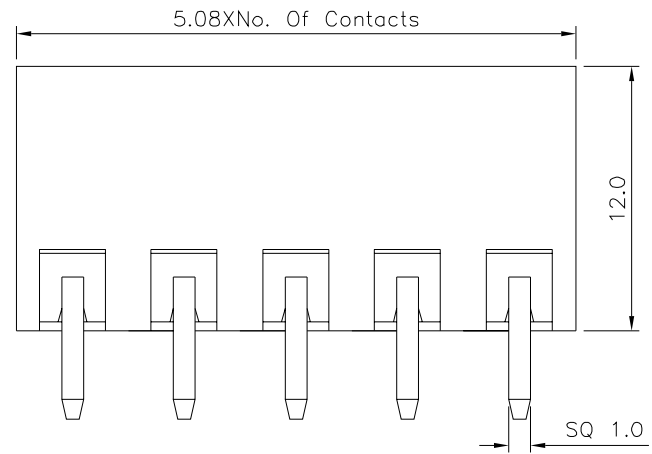


**△ SPECIFICATION**  
 Current Rating:16A  
 Voltage Rating:300V AC  
 Withstanding Voltage:2500V AC 1 Minute  
 Using Temperature Range:-40°C~+105°C  
 Soldering Temperature:+250°C,5s Max.  
 Solder Pin:Copper Alloy,Tin Plated  
**△ Insulator Body(Housing):Polyamide+G.F(UL94V-0),Green  
 RoHS Compliant**

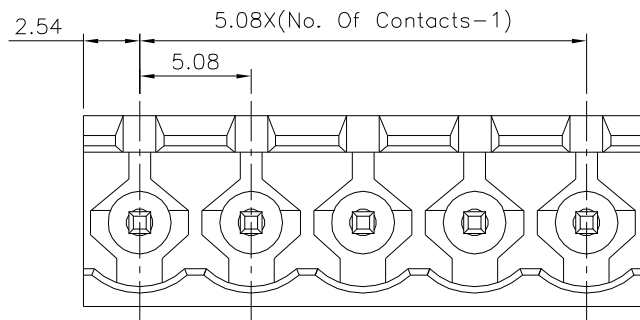

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No. **09131**  
 SCALE NONE

APPROVED BY EMILY  
 CHECKED BY HZF  
 DRAWING BY CYP  
 REV. A3

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE  
 X. ±0.50  
 .X ±0.30  
 .XX ±0.20  
 ANG. ±1°  
 UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
3	A3	Modify Data	HZF	11/02/2022
2	A2	Modify Data	HZF	09/24/2015
1	A1	Modify Data	HZF	06/07/2013
0	A0	NEW RELEASE	HZF	02/02/2010