
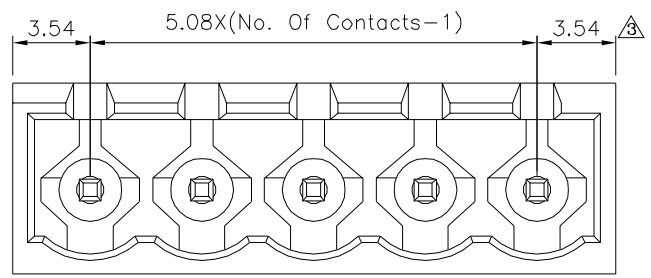
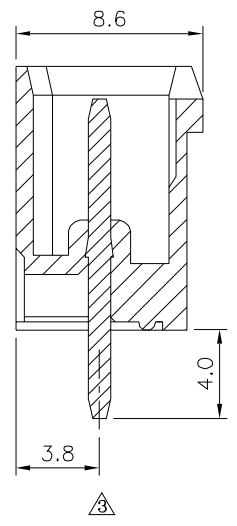


Recommended P.C.B. Layout

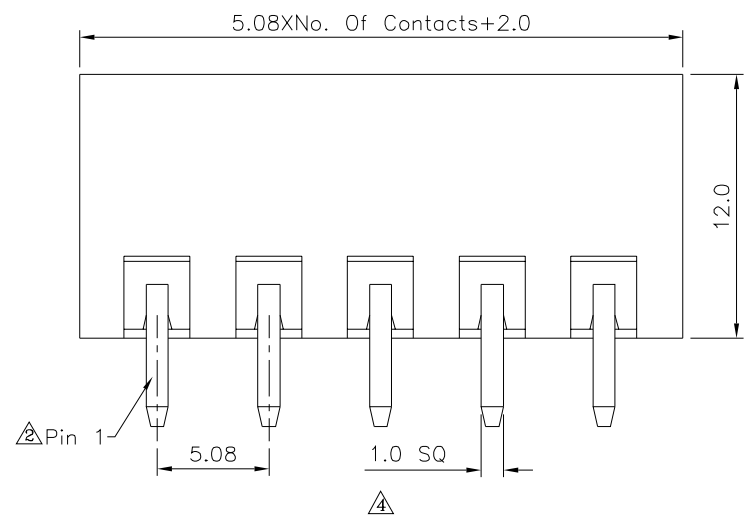

△ SPECIFICATION

Current Rating:16A
 Voltage Rating:300V AC
 Withstanding Voltage:2500V AC(1Minute)
 Using Temperature Range:-40°C~+105°C
 Soldering Temperature:+250°C,5s Max.
 Solder Pin:Copper Alloy,Tin Plated

**△ Insulator Body(Housing):Polyamide+G.F.(UL94V-0),Green
 RoHS Compliant**

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No. △
09134

APPROVED BY EMILY
 CHECKED BY HZF
 DRAWING BY HAO

SCALE NONE

REV. A4

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 X. ±0.50
 .X ±0.30
 .XX ±0.20
 ANG. ±1°
 UNIT mm

△ A4	Modify Data	HZF	12/05/2014
△ A3	Modify Data	HZF	01/25/2013
△ A2	Modify Data	HZF	11/22/2011
△ A1	Modify Data	HZF	08/04/2011
△ A0	NEW RELEASE	HZF	04/13/2009
NO. REV.	REVISIONS	CHK	DATE