File No.	689QG28802	SHEET	1/1

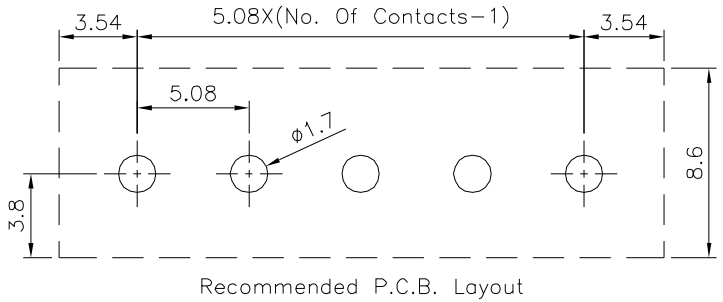

Recommended P.C.B. Layout

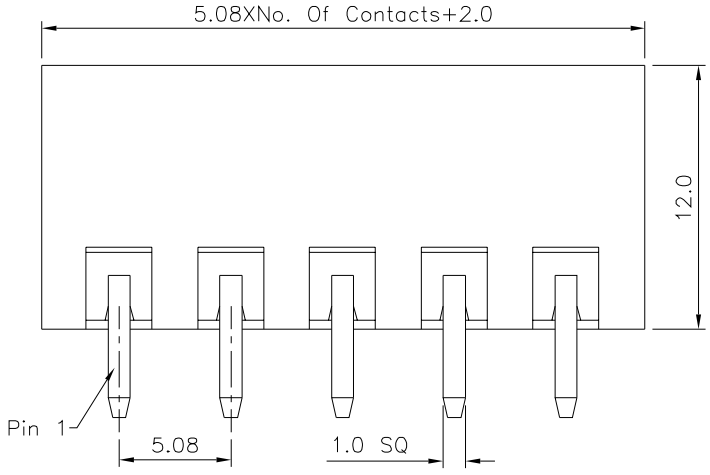

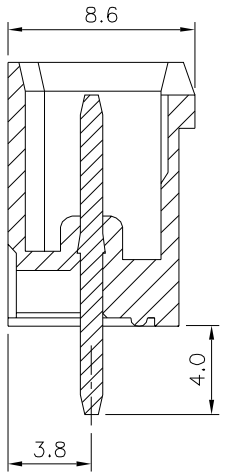

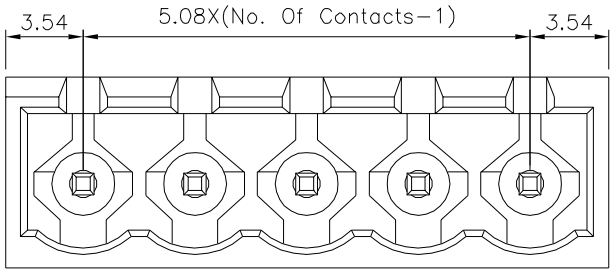

SPECIFICATION

Current Rating:16A
Voltage Rating:300V AC
Withstanding Voltage:2500V AC(1Minute)
Using Temperature Range:−40°C~+105°C
Solder Pin:Copper Alloy,Tin Plated
Insulator Body(Housing):Polyamide(UL94V−0),Green
RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.	09141		
SCALE	NONE	REV.	B0

APPROVED BY	Jason Wu
CHECKED BY	Leo Han
DRAWING BY	Michelle Lee

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
X. ±0.50
.X ±0.30
.XX ±0.20
ANG. ±1°
UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
0	B0	NEW RELEASE	HZF	06/01/2025