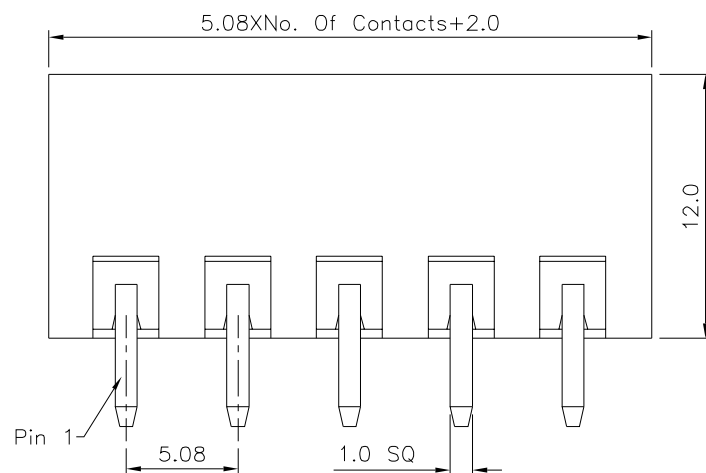
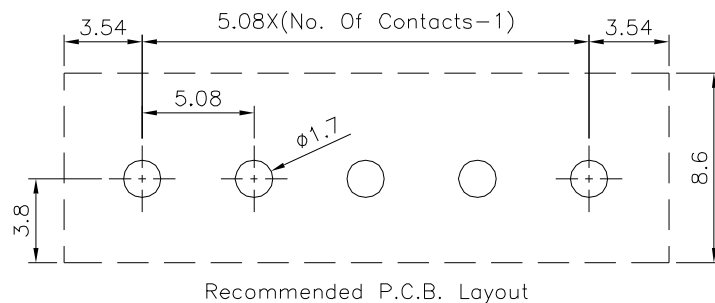


SPECIFICATION

Current Rating:16A
Voltage Rating:300V AC
Withstanding Voltage:2500V AC(1Minute)
Using Temperature Range:-40°C~+105°C
Solder Pin:Copper Alloy,Tin Plated
Insulator Body(Housing):Polyamide(UL94V-0),Green
RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

09143

SCALE

NONE

APPROVED BY

Jason Wu

CHECKED BY

Leo Han

DRAWING BY

Michelle Lee

REV.

B0

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE


X. ±0.50

.X ±0.30

.XX ±0.20

ANG. ±1°

UNIT
mm



NO.

REV.

B0

NEW RELEASE

REVISIONS

CHK

DATE

NO.

REV.

REVISIONS

CHK

DATE

NO.

REV.

REVISIONS

CHK

DATE

NO.

REV.

REVISIONS

CHK

DATE