
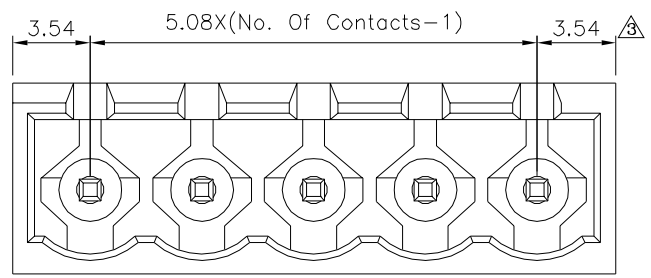
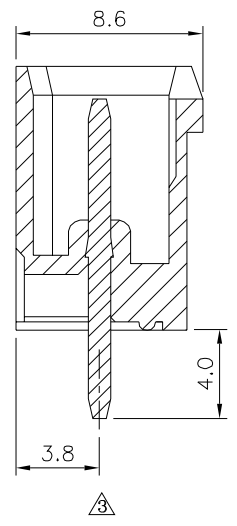


Recommended P.C.B. Layout

**△ SPECIFICATION**

Current Rating:16A  
 Voltage Rating:300V AC  
 Withstanding Voltage:2500V AC(1Minute)  
 Using Temperature Range:-40°C~+105°C  
 Soldering Temperature:+250°C,5s Max.  
 Solder Pin:Copper Alloy,Tin Plated

**△ Insulator Body(Housing):Polyamide+G.F.(UL94V-0),Green  
 RoHS Compliant**

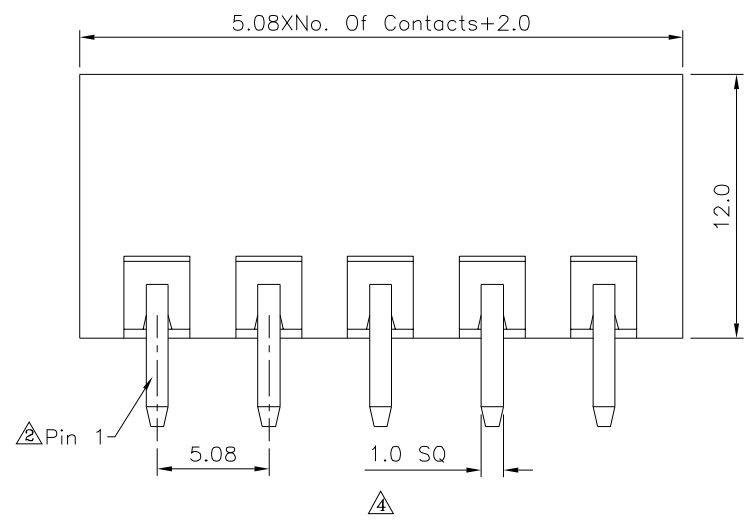

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No. △  
 09155

APPROVED BY EMILY  
 CHECKED BY HZF  
 DRAWING BY HAO  
 REV. A4

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE  
 X. ±0.50  
 .X ±0.30  
 .XX ±0.20  
 ANG. ±1°  
 UNIT mm

△ A4	Modify Data	HZF	12/05/2014
△ A3	Modify Data	HZF	01/25/2013
△ A2	Modify Data	HZF	11/22/2011
△ A1	Modify Data	HZF	08/04/2011
△ A0	NEW RELEASE	HZF	04/13/2009
NO. REV.	REVISIONS	CHK	DATE