| File No. | 227 | SHEET | 1 / 1 |
|---|---|---|---|

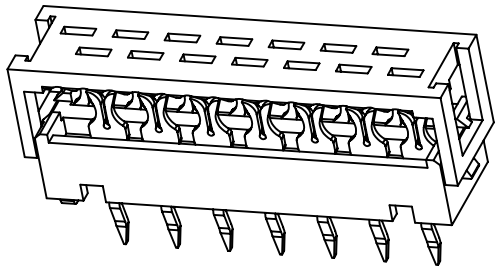

## SPECIFICATIONS

Current Rating:1.0A AC,DC
Voltage Rating:30V AC,DC
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megohms Min.
Withstanding Voltage:AC 500V AC/Minute
Operating Temperature:−40°C ~ +105°C
Insulator:High Temp. Plastic UL94V−0
Contact:Phosphor Bronze
Finish:Tin Plated

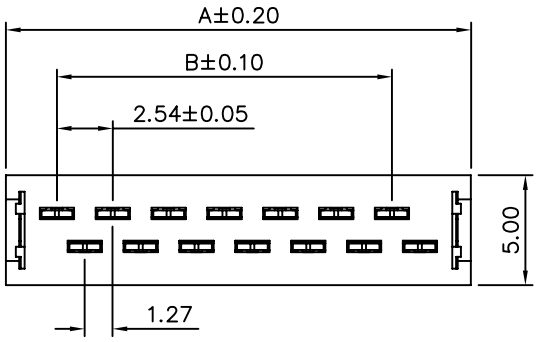


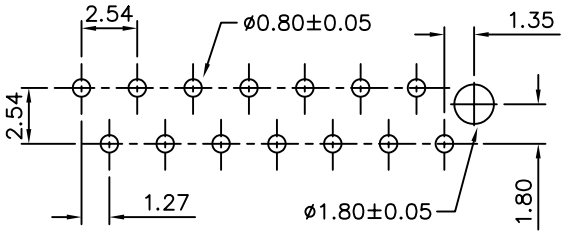


PCB Layout

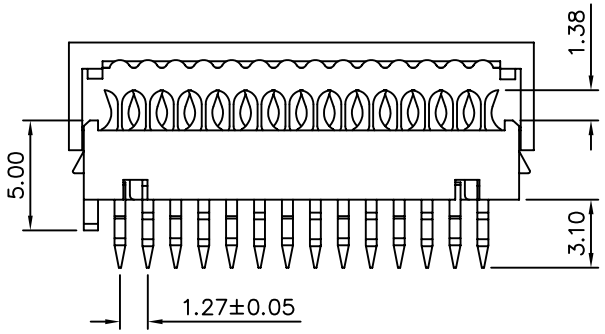





| Circuit | Dim. A | Dim. B |
|---|---|---|
| 04 | 8.45 | 2.54 |
| 06 | 10.99 | 5.08 |
| 08 | 13.53 | 7.62 |
| 10 | 16.07 | 10.16 |
| 12 | 18.61 | 12.70 |
| 14 | 21.15 | 15.24 |
| 16 | 23.69 | 17.78 |
| 18 | 26.23 | 20.32 |
| 20 | 28.77 | 22.86 |

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

| DRAWING No. | APPROVED BY | UNLESS OTHERWISE SPECIFIED TOLERANCES ARE |
|---|---|---|
| 09235 | MEI | .X ±0.2 |
| | CHECKED BY BECKY | .XX ±0.15 |
| | DRAWING BY HZF | ANG. |
| SCALE NONE | REV. A0 | UNIT mm |

| NO. | REV. | REVISIONS | CHK | DATE |
|---|---|---|---|---|
| 0 | A0 | NEW RELEASE | BECKY | 02/15/2005 |