

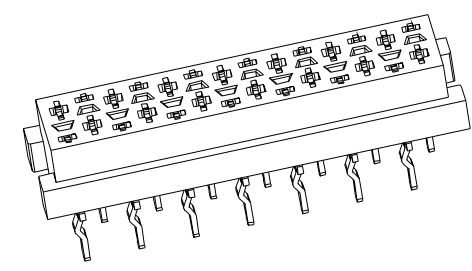
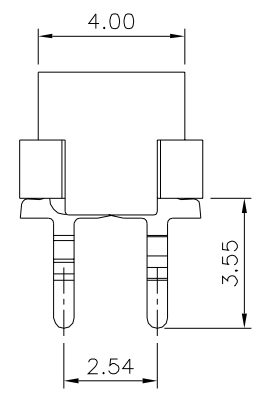


Recommended P.C.B. Layout

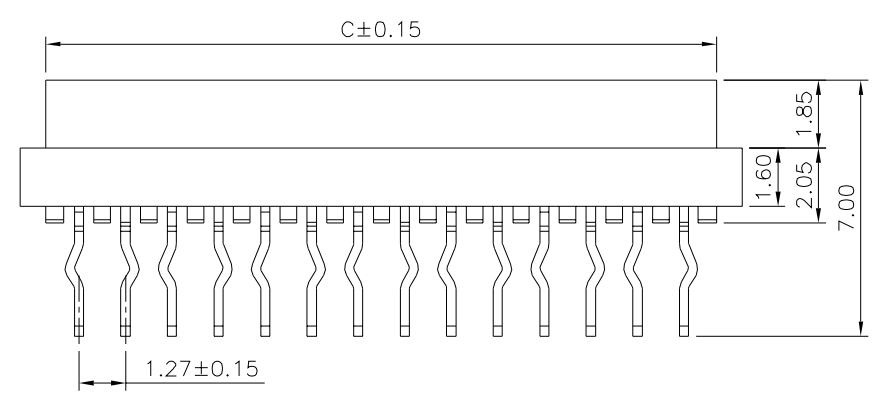

SPECIFICATION

Current Rating:1.5A AC/DC
 Voltage Rating:230V AC/DC
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Withstanding Voltage:500V AC/Minute
 Operation Temperature:-40°C~+105°C
 Insulator:PA9T(UL94V-0),Red
 Contact:Phosphor Bronze,Tin Plated Over Nickel
 RoHS Compliant

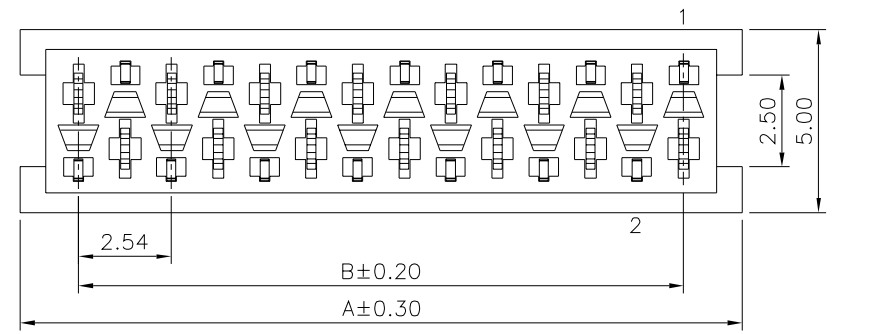

Pin	A	B	C
04	7.00	3.81	5.60
06	9.54	6.35	8.14
08	12.08	8.89	10.68
10	14.62	11.43	13.22
12	17.16	13.97	15.76
14	19.70	16.51	18.30
16	22.24	19.05	20.84
18	24.78	21.59	23.38
20	27.32	24.13	25.92
22	29.86	26.67	28.46
24	32.40	29.21	31.00
26	34.94	31.75	33.54

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No. 09243
 SCALE NONE

APPROVED BY MEI
 CHECKED BY HZF
 DRAWING BY CYP
 REV. C0

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 .X ±0.2
 .XX ±0.15
 ANG.
 UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△	C0	NEW RELEASE	HZF	01/28/2022