





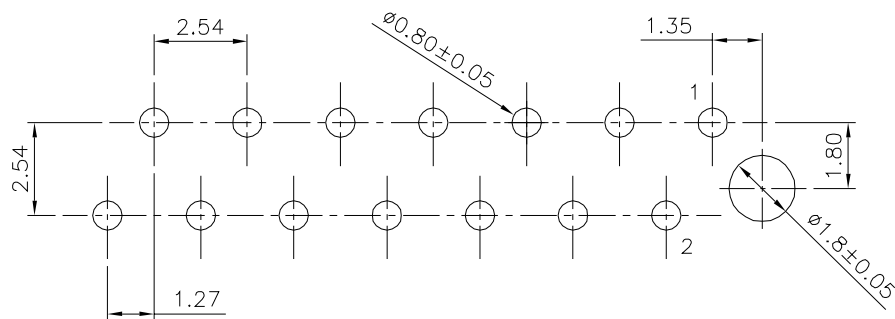


Recommended P.C.B. Layout

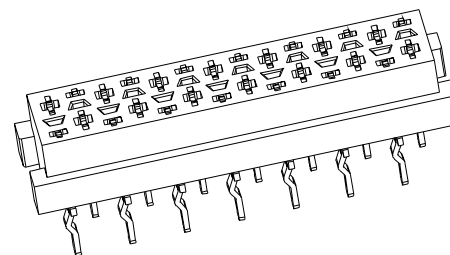

SPECIFICATION

Current Rating:1.5A AC/DC
Voltage Rating:230V AC/DC
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Withstanding Voltage:500V AC/Minute
Operation Temperature:-40°C~+105°C
Insulator:PA9T(UL94V-0),Red
Contact:Phosphor Bronze,Tin Plated Over Nickel
RoHS Compliant

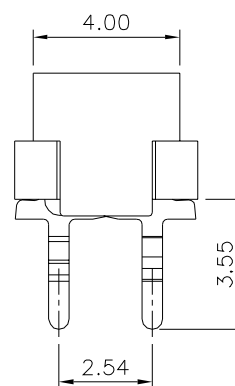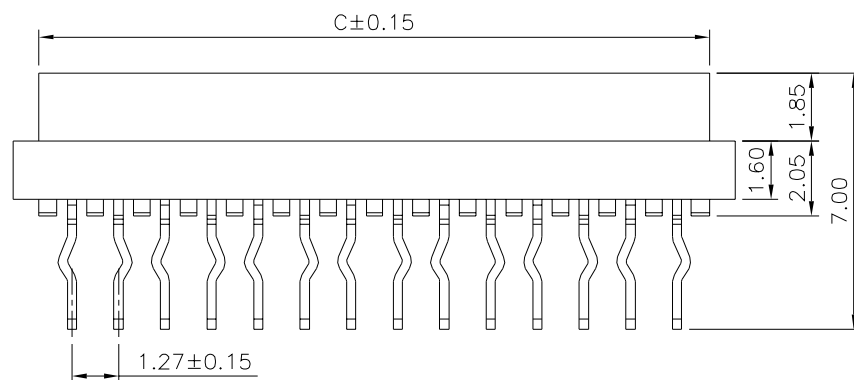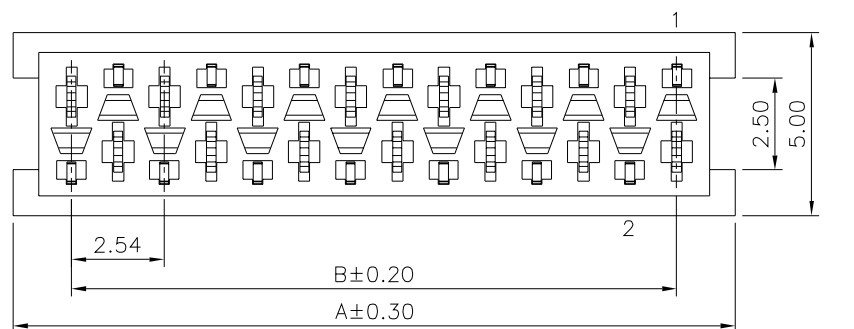

Pin	A	B	C
04	7.00	3.81	5.60
06	9.54	6.35	8.14
08	12.08	8.89	10.68
10	14.62	11.43	13.22
12	17.16	13.97	15.76
14	19.70	16.51	18.30
16	22.24	19.05	20.84
18	24.78	21.59	23.38
20	27.32	24.13	25.92
22	29.86	26.67	28.46
24	32.40	29.21	31.00
26	34.94	31.75	33.54

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

09248

SCALE NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP

REV.

C0

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
.X ±0.2
.XX ±0.15
ANG.

UNIT
mm



△ C0
NO. REV.

NEW RELEASE

REVISIONS

HZF

CHK

01/28/2022

DATE