

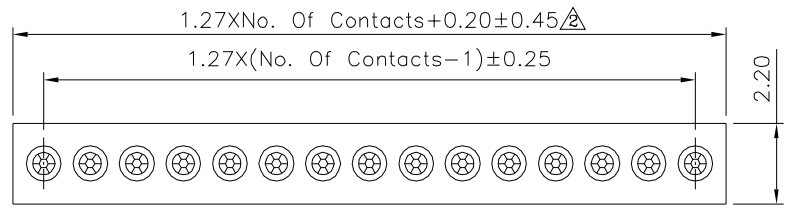


Recommended P.C.B. Layout



⚠

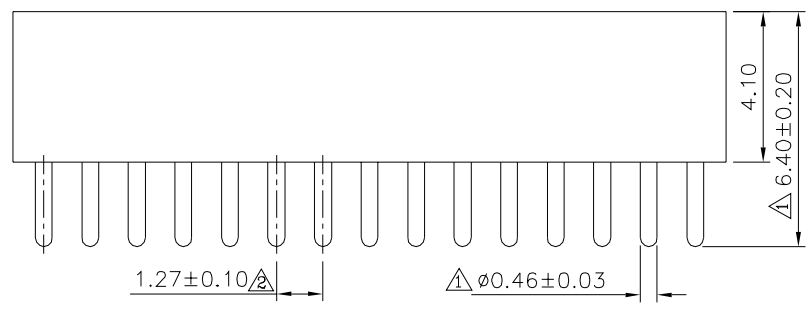

⚠

⚠ SPECIFICATION

Current Rating: 1 Amp/Contact Max.
 Contact Resistance: 4 Milliohms Max./Contact
 Insulation Resistance: 1000 Megaohms Min. At 500V
 Dielectric Withstanding Voltage: 1000V AC/Minute
 Operation Voltage: 60V AC/DC
 ⚠ Pin (Outer Sleeve): Brass, Tin Plated Over Nickel
 ⚠ Clip (Contact 6 Finger): Beryllium Copper, Heat Treated, Gold Plated Over Nickel
 Insulator: PA46 (UL94V-0), Black
 Operation Temperatures: Gold Plated: $-55^{\circ}\text{C} \sim +125^{\circ}\text{C}$
 Tin Plated: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$
 Soldering Temperature: $+260^{\circ}\text{C}$, 10s Max.
 RoHS Compliant

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No. ⚠
 09299


APPROVED BY EMILY
 CHECKED BY HZF
 DRAWING BY HAO

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 X: ± 0.25
 .XX: ± 0.15
 .XXX: ± 0.10
 ANG. $\pm 5^{\circ}$
 UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
⚠	B3	Modify Data	HZF	10/27/2015
⚠	B2	Modify Data	HZF	01/17/2013
⚠	B1	Modify Data	HZF	01/07/2010
⚠	B0	NEW RELEASE	HZF	05/20/2008

SCALE NONE

REV. B3



UNIT mm