

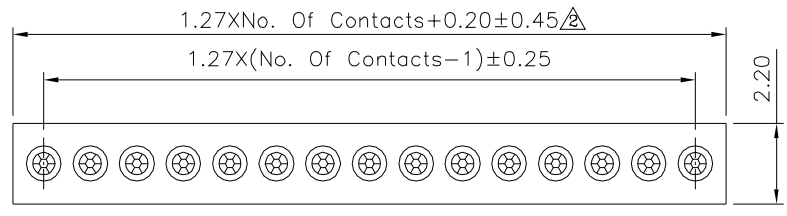


Recommended P.C.B. Layout

**△ SPECIFICATION**  
 Current Rating: 1 Amp/Contact Max.  
 Contact Resistance: 4 Milliohms Max./Contact  
 Insulation Resistance: 1000 Megaohms Min. At 500V  
 Dielectric Withstanding Voltage: 1000V AC/Minute  
 Operation Voltage: 60V AC/DC  
**△ Pin (Outer Sleeve):** Brass, Tin Plated Over Nickel  
**△ Clip (Contact 6 Finger):** Beryllium Copper, Heat Treated, Gold Plated Over Nickel  
 Insulator: PA46 (UL94V-0), Black  
 Operation Temperatures: Gold Plated:  $-55^{\circ}\text{C} \sim +125^{\circ}\text{C}$   
 Tin Plated:  $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$   
 Soldering Temperature:  $+260^{\circ}\text{C}$ , 10s Max.  
 RoHS Compliant



△

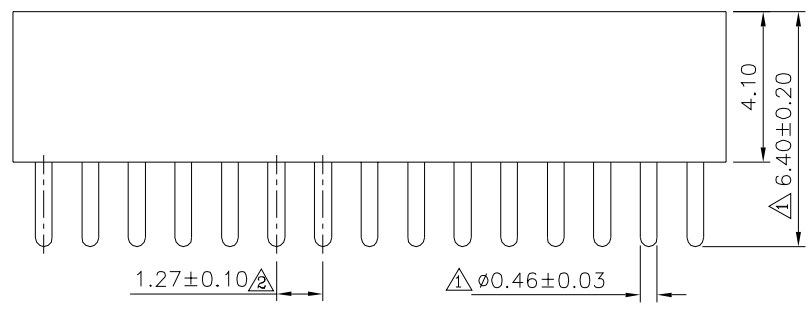

△

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No. △  
 09305

APPROVED BY EMILY  
 CHECKED BY HZF  
 DRAWING BY HAO

SCALE NONE

REV. B3

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE  
 X: ±0.25  
 .XX ±0.15  
 .XXX ±0.10  
 ANG. ±0.05  
 UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△3	B3	Modify Data	HZF	10/27/2015
△2	B2	Modify Data	HZF	01/17/2013
△1	B1	Modify Data	HZF	01/07/2010
△0	B0	NEW RELEASE	HZF	05/20/2008