

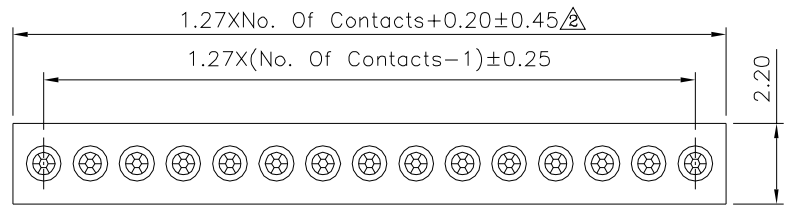


Recommended P.C.B. Layout



⚠

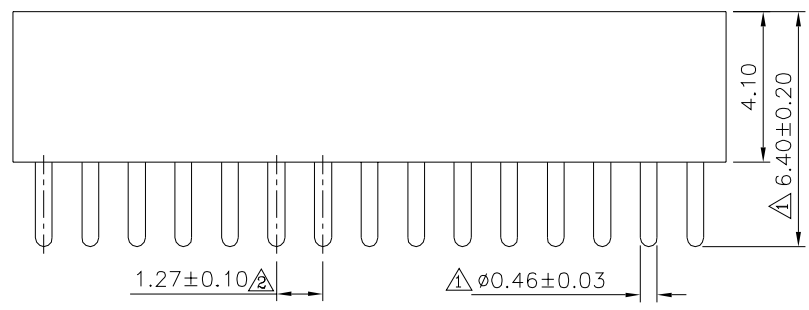

⚠

⚠ SPECIFICATION

Current Rating:1 Amp/Contact Max.
 Contact Resistance:4 Milliohms Max./Contact
 Insulation Resistance:1000 Megaohms Min. At 500V
 Dielectric Withstanding Voltage:1000V AC/Minute
 Operation Voltage:60V AC/DC
 ⚠ Pin(Outer Sleeve):Brass,Tin Plated Over Nickel
 ⚠ Clip(Contact 6 Finger):Beryllium Copper,Heat Treated,
 Gold Plated Over Nickel
 Insulator:PA46(UL94V-0),Black
 Operation Temperatures:Gold Plated:-55°C~+125°C
 Tin Plated:-40°C~+105°C
 Soldering Temperature:+260°C,10s Max.
 RoHS Compliant

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No. ⚠
 09309

APPROVED BY EMILY
 CHECKED BY HZF
 DRAWING BY HAO

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 X: ±0.25
 .XX ±0.15
 .XXX ±0.10
 XXX ±0.05
 ANG. ±5°
 UNIT mm

⚠	B3	Modify Data	HZF	10/27/2015
⚠	B2	Modify Data	HZF	01/17/2013
⚠	B1	Modify Data	HZF	01/07/2010
⚠	B0	NEW RELEASE	HZF	05/20/2008
NO. REV.	REVISIONS		CHK	DATE