

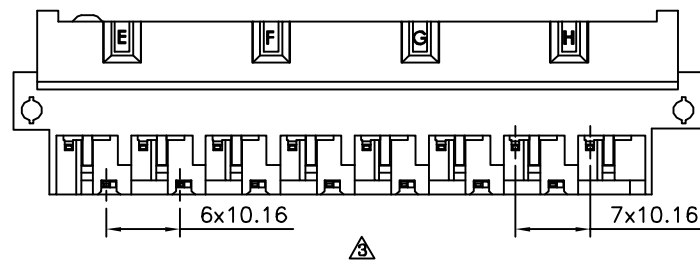
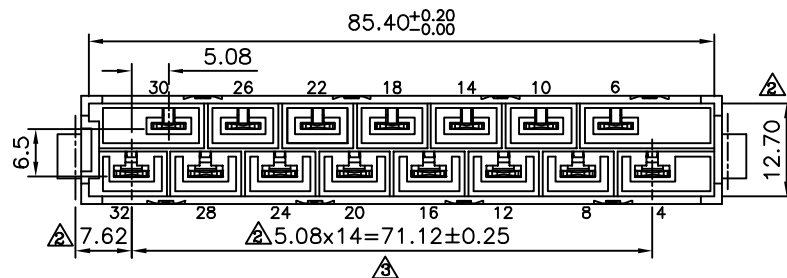


Recommended P.C.B. Layout
(PCB Board Tolerance ± 0.05)

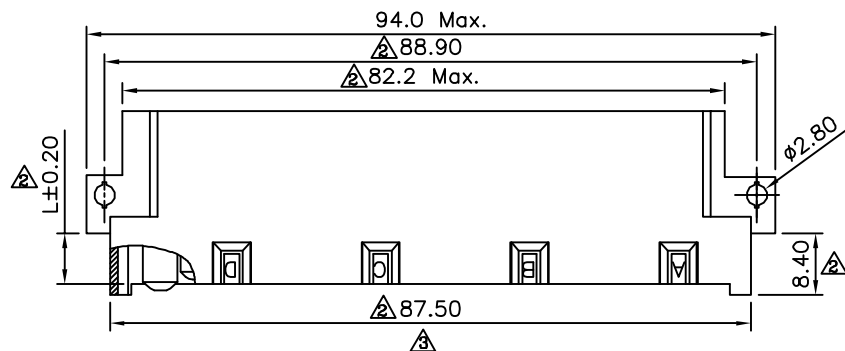

SPECIFICATION

Current Rating: 15 Amp
Dielectric Withstanding Voltage: 3100V AC For 1 Minute
Insulation Resistance: 1000 Megaohms Min. At DC 500V
Contact Resistance: 8 Milliohms Max. At DC 100mA
Operation Temperature: $-55^{\circ}\text{C} \sim +105^{\circ}\text{C}$
Housing: PBT+30%G.F.(UL94V-0)
Contacts: Copper Alloy, Tin Plated Over Nickel
RoHS Compliant

Contact No.	L
z4,z8,z12,z16,z20,z24,z28	6.00
z32	7.65
d6,d10,d14,d18,d22,d26,d30	6.00

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

09581

SCALE NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

WZL

REV.

A3

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

ϕ X. ± 0.5

.X ± 0.25

.XX ± 0.15

UNIT

mm

	A3	Modify Data	HZF	12/20/2010
	A2	Modify Data	HZF	02/17/2009
	A1	Modify Data	BECKY	03/14/2005
	A0	NEW RELEASE	LHC	
NO	REV	REVISIONS	CHK	DATE