

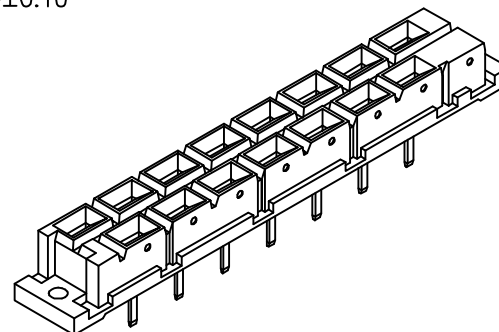
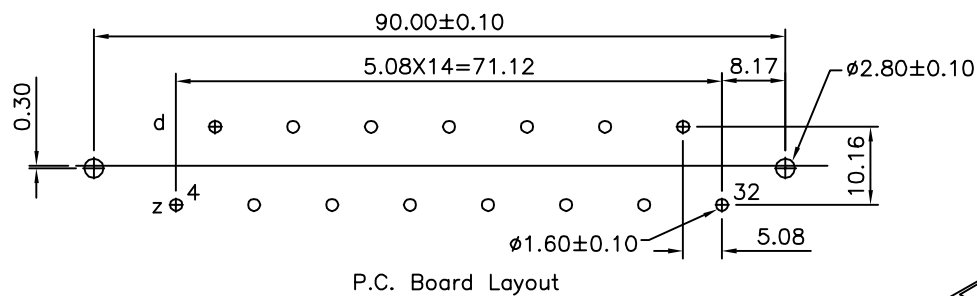
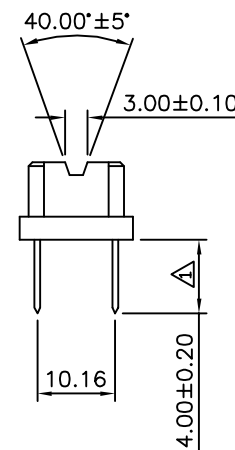


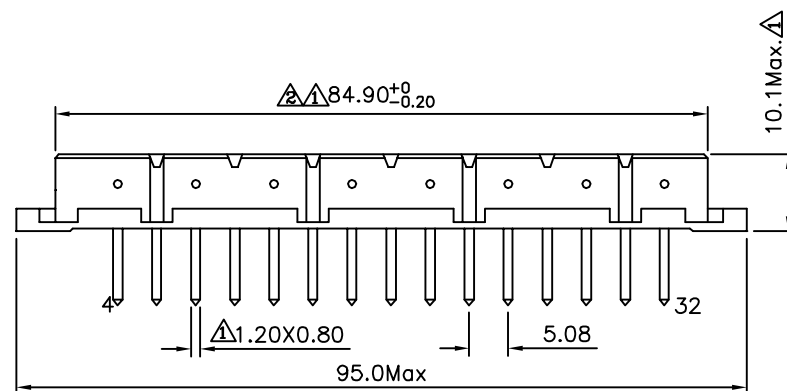

SPECIFICATION

Current Rating:2 Amp
 Dielectric Withstand Voltage:1000V AC/Minute
 Contact Resistance:30 Milliohms Max.
 At DC 100mA
 Insulation Resistance:1000 Megaohms Min.
 At DC 500V
 Operation Temperature:-55°C~+125°C
 Housing:PBT+G.F.(UL94V-0)
 Contact:Phosphor Bronze,Tin Plated Over Nickel
 RoHS Compliant

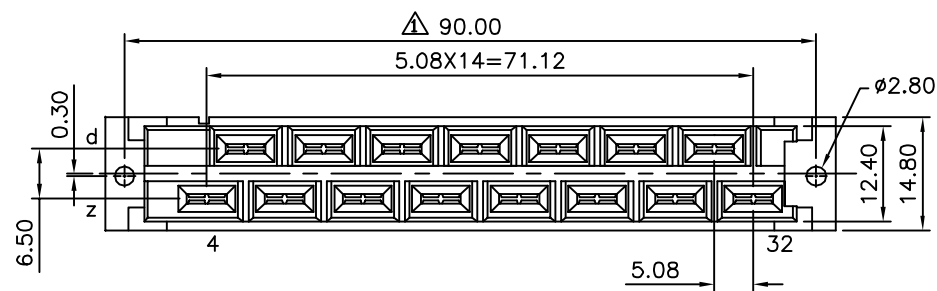

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

09582

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

SAN

REV.

A2

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE

X. ±0.5
 .X ±0.25
 .XX ±0.15

UNIT

mm

NO.	REV.	REVISIONS	CHK	DATE
△A2		Modify Data	HZF	03/19/2014
△A1		Modify Data	HZF	02/17/2009
△A0		NEW RELEASE		