
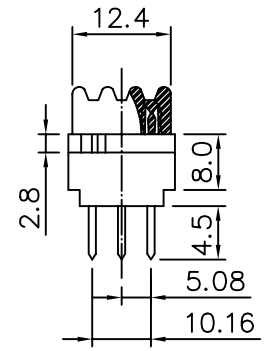
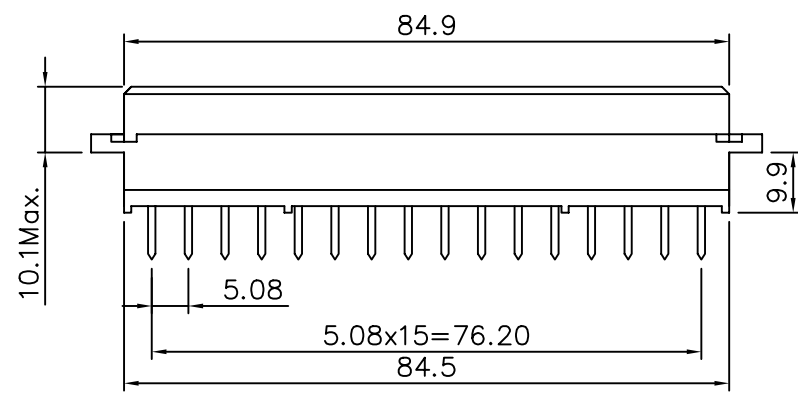
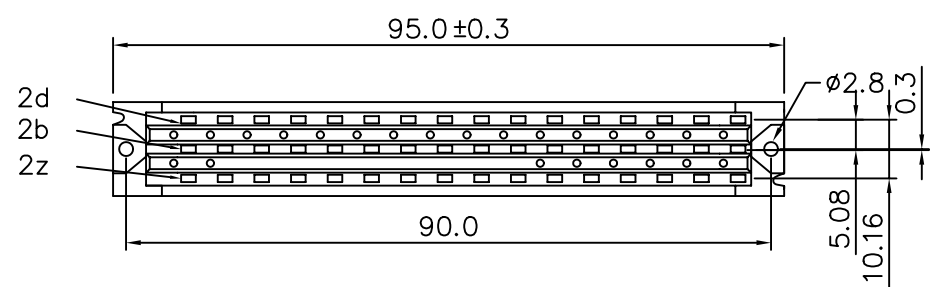


SPECIFICATIONS:

Current Rating : 5.6A
 Dielectric Withstanding Voltage : AC1000V
 For 1 Minute
 Insulation Resistance : 1000Megohms Min.
 At DC 500V
 Contact Resistance : 30 Milliohms At DC 100mA
 Operating Temperature : -55°C To +105°C
 Housing : 30% Glass Filled PBT UL 94V-0
 Contacts : Brass

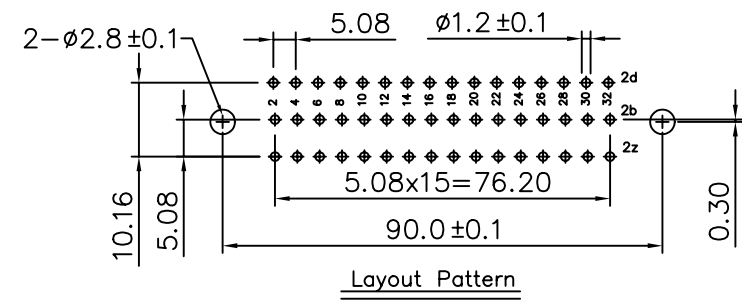

Pitch	Position	Rows With Contacts	Contact Arrange
5.08mm	48	z b d	

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.38 .XX ±0.25 .XXX
09585		MEI		
		RAN		
		DRAWING BY		
		HZF		
SCALE	NONE	REV.	A	UNIT mm

AREA	REVISIONS	CHK	DATE
------	-----------	-----	------