
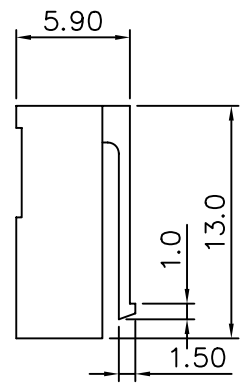
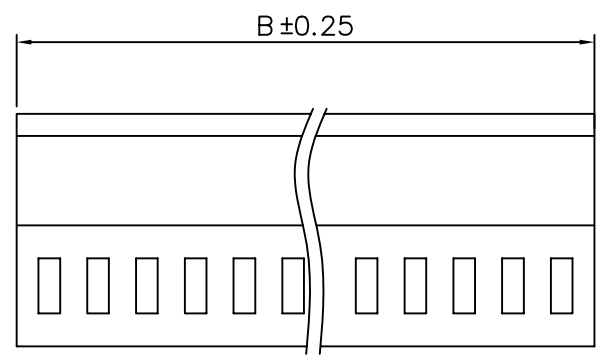


SPECIFICATION:
 Current Rating: 3A
 Voltage Rating: 250V AC, DC
 Withstanding Voltage: 800V AC/Minute
 Contact Resistance: 20 Milliohms Max.
 Insulation Resistance: 1000 Megohms Min.
 Temperature Range: -25°C to +85°C
 Insulator: P.B.T UL 94V-0

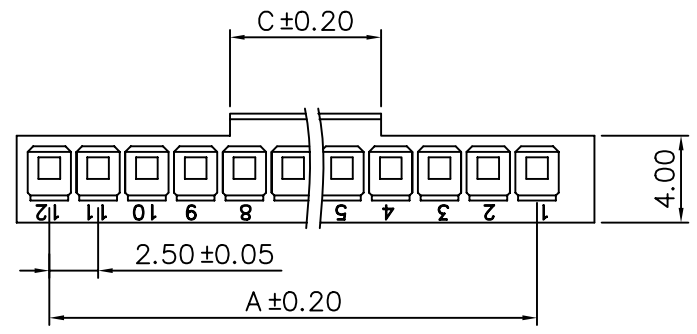

Poles	Dimension : mm			PCS/Bag
	A	B	C	
2	2.50	5.50	2.00	1000
3	5.00	8.00	2.50	1000
4	7.50	10.50	5.00	1000
5	10.00	13.00	5.00	1000
6	12.50	15.50	6.00	1000
7	15.00	18.00	8.00	500
8	17.50	20.50	10.00	500
9	20.00	23.00	10.00	500
10	22.50	25.50	10.00	500
11	25.00	28.00	11.00	500
12	27.50	30.50	11.00	500
13	30.00	33.50	13.00	500
14	32.50	35.50	13.00	500

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.
 09626

APPROVED BY MEI
 CHECKED BY RAN
 DRAWING BY HZF

UNLESS OTHERWISE SPECIFIED
 TOLERANCES ARE
 .X ±0.25
 .XX ±0.15
 .XXX ±0.08

SCALE NONE REV. A UNIT mm

AREA REVISIONS CHK DATE