

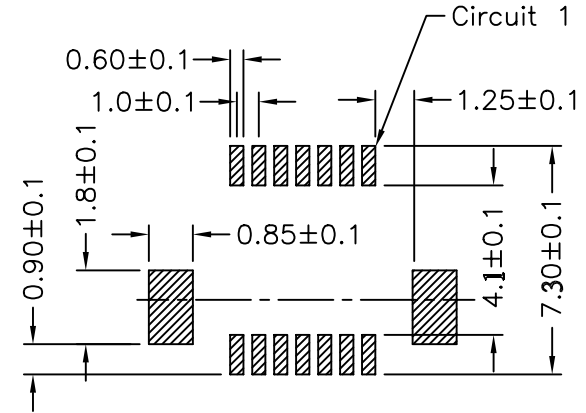
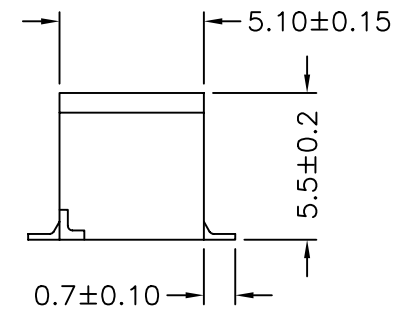


Specifications

Current Rating: 1A AC,DC
 Voltage Rating : 50V AC DC
 Temperature Range : -25°C to +85°C
 Insulation Resistance: 500Megohms Min.
 Contact Resistance: 20Milliohms Max.
 Withstanding Voltage : 500V AC/Minute
 Pin Material : Brass/Tin plated
 Solder Tabs : Brass/Tin plated
 Wafer : Nylon 6T, UL 94V-0

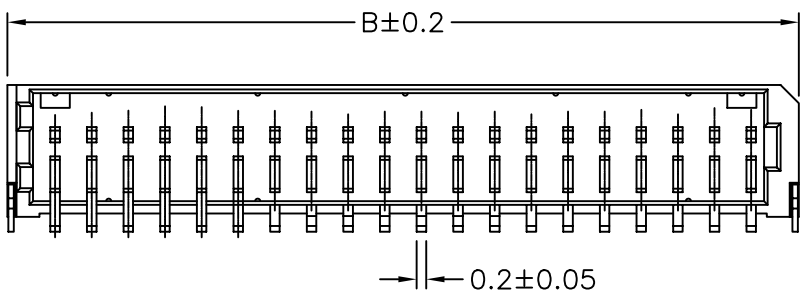

PCB LAYOUT

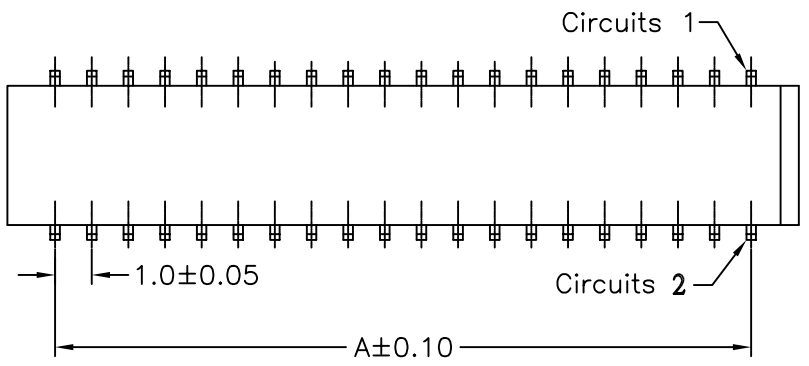

POS.#	DIM. A	DIM. B
2x10P	9.00	13.10
2X15P	14.00	18.10
2x20P	19.00	23.10
2X25P	24.00	28.10

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.
 09891

APPROVED BY MEI
 CHECKED BY RAN
 DRAWING BY HZF

UNLESS OTHERWISE SPECIFIED
 TOLERANCES ARE
 .X ±0.38
 .XX ±0.25
 ANG.

SCALE NONE REV. A UNIT mm

AREA REVISIONS CHK DATE