
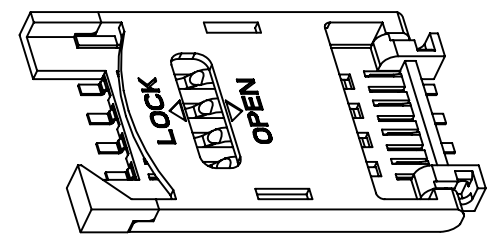
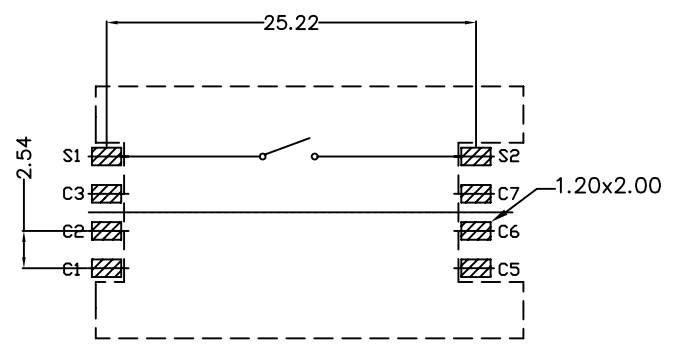
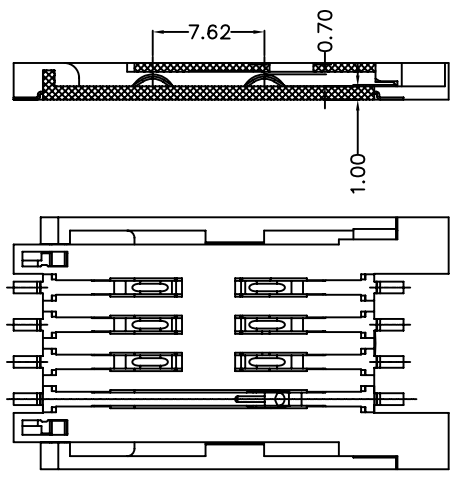



SPECIFICATIONS

Housing: Hi-Temp. Plastic(UL94 V-0)
 Terminal: Phosphor Bronze, Gold Plating On Contact Area,
 Tin Plating On Solder Tail.
 Current Rating: 0.5A Max.
 Dielectric Withstanding Voltage: 500V AC R.M.S. For 1 Minute
 Insulation Resistance: 1000 Megohms Min. At DC 500V
 Contact Resistance: 50 Milliohms Max.
 Durability: 5000 Cycles
 Operation Temperature: -25°C To +85°C
 Manual Soldering: 360°C, 3 Sec Max.
 Vapor Phase : 215°C, 30 Sec Max.
 IR Reflow: 260°C, 15 Sec Max.
 RoHS Compliant

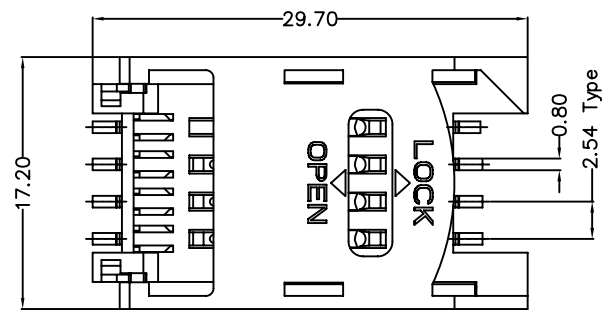

(.XX±0.05)
 REFERENCE PCB LAYOUT

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.
 09897

APPROVED BY MEI
 CHECKED BY LHC
 DRAWING BY XSH

UNLESS OTHERWISE SPECIFIED
 TOLERANCES ARE
 .X ±0.38
 .XX ±0.25
 ANG. ±1°
 UNIT mm

SCALE NONE REV. A0

NO. REV.

NEW RELEASE REVISIONS

XSH 01/24/2006
 CHK DATE