
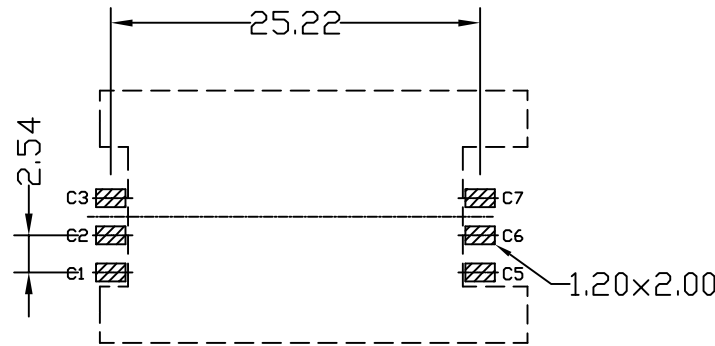
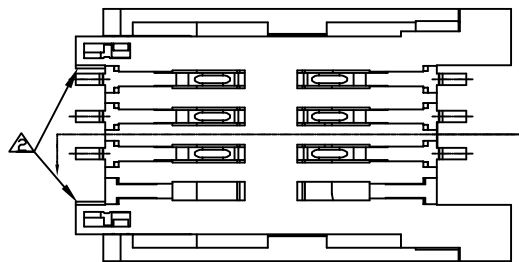
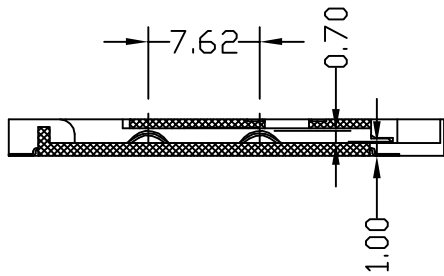



SPECIFICATIONS

Housing: Thermoplastic (UL94 V-0)
 Terminal: Phosphor Bronze, Gold Plating On Contact Area,
 Tin Plating On Solder Tail.
 Current Rating: 0.5A Max.
 Dielectric Withstanding Voltage: 500V AC R.M.S. For 1 Minute
 Insulation Resistance: 1000 Megohms Min. At DC 500V
 Contact Resistance: 50 Milliohms Max.
 Durability: 5000 Cycles
 Manual Soldering: 360°C, 3Sec Max.
 Vapor Phase: 215°C, 30Sec Max.
 IR Reflow: 260°C, 15Sec Max.
 Operation Temperature: -25°C To +85°C
 RoHS Compliant

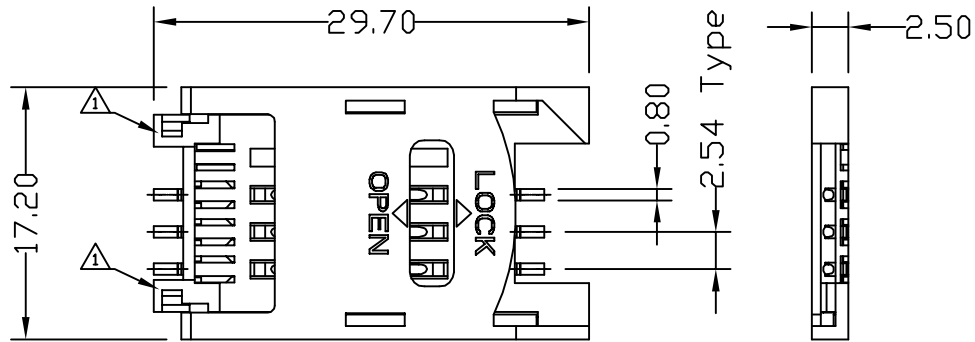

(.XX±0.05)

REFERENCE PCB LAYOUT

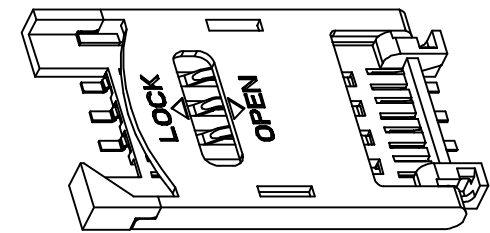

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.
 09898

APPROVED BY
 MEI
 CHECKED BY
 SHIN
 DRAWING BY
 XSH 01/08-2008

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 .X ±0.38
 .XX ±0.25
 ANG. ±1°
 UNIT mm

SCALE NONE

REV. A2

NO	REV.	DESCRIPTION	CHK	DATE
△A2		ADD CHAMFER	XSH	01/08-2008
△A1		MODIFIED AXES	XSH	09/26-2007
△A0		NEW RELEASE	XSH	01/04-2007
		REVISIONS	CHK	DATE