

SPECIFICATIONS

Housing: Thermoplastic (UL94 V-0)

Terminal: Phosphor Bronze, Gold Plating On Contact Area,

Tin Plating On Solder Tail.

Current Rating: 0.5A Max.

Dielectric Withstanding Voltage: 500V AC R.M.S. For 1 Minute

Insulation Resistance: 1000 Megohms Min. At DC 500V

Contact Resistance: 50 Milliohms Max.






Durability: 5000 Cycles

Manual Soldering: 360°C, 3 Sec Max.


Vapor Phase : 215°C, 30 Sec Max.

IR Reflow: 260°C, 15 Sec Max.

Operation Temperature: -25°C To +85°C

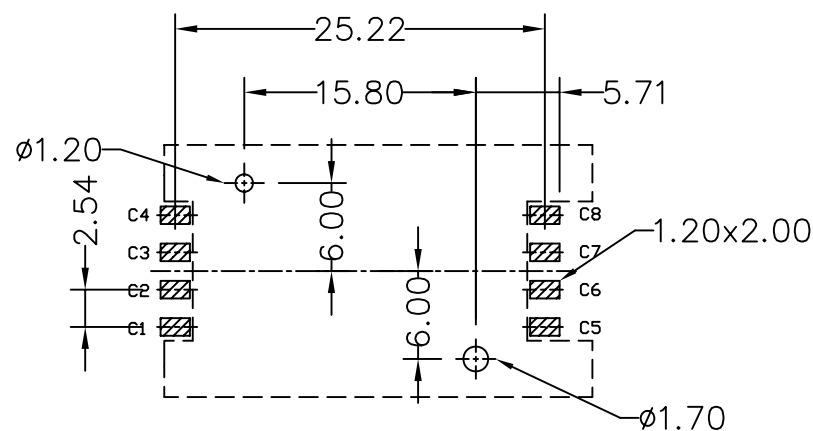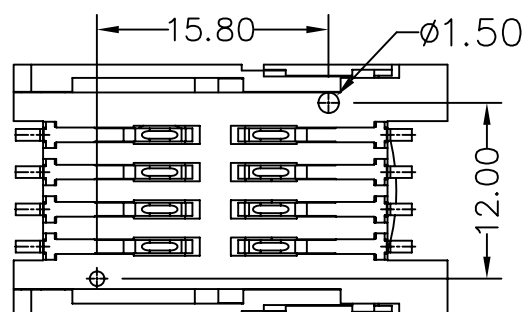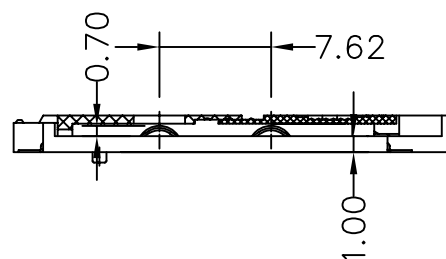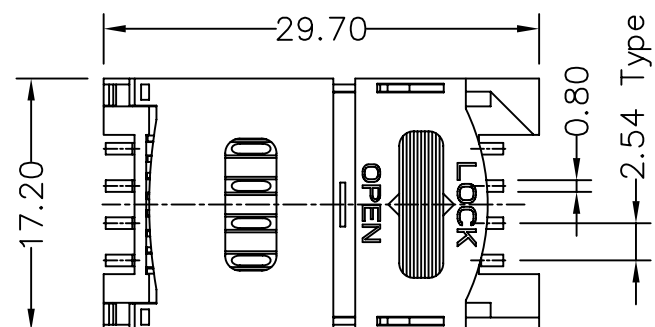

(.XX±0.05)
REFERENCE PCB LAYOUT

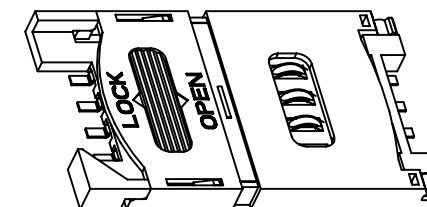

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

09902

APPROVED BY

MEI

CHECKED BY

LHC

DRAWING BY

XSH


UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

.X	± 0.38
----	------------

.XX	±0.25
-----	-------

ANG.	$\pm 1^\circ$
------	---------------

	UNIT mm
--	------------



	AO
NO.	REV

NEW RELEASE

REVISIONS

	XSH
--	-----

01/04/2006

	CHK
--	-----

K	DATE
---	------