




△ Recommended P.C.B. Layout

Pitch	Position	Rows With Contacts	Contact Arrange
5.08mm	16	a -	
	32	a b	
2.54mm	32	a -	
	64	a b	

△ SPECIFICATION  
 Current Rating: 2 Amp  
 Withstand Voltage: 1000V AC For 1 Minute  
 Contact Resistance: 20 Milliohms Max. At 100mA DC  
 Insulation Resistance: 1000 Megaohms Min. At 500V DC  
 Operation Temperature: -55°C ~ +125°C  
 Insulator: Thermoplastic Polyester + G.F., UL94V-0  
 Contact: Copper Alloy  
 Gold Flash On Contact Area, Tin Plated On Solder Tails, Over Nickel  
 △ Lock: Copper Alloy, Tin Plated  
 RoHS Compliant

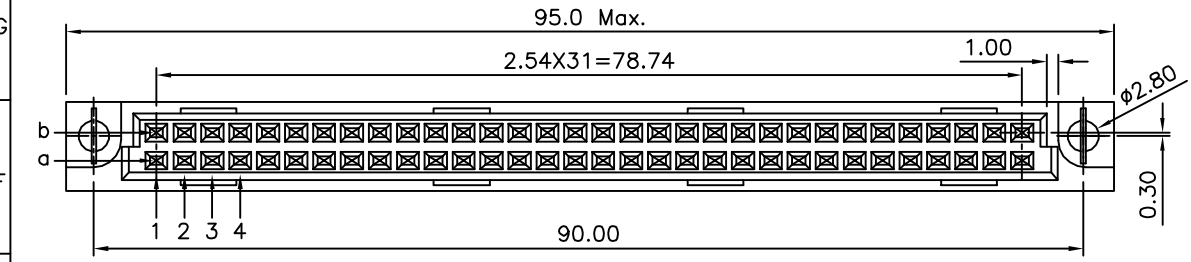

△△

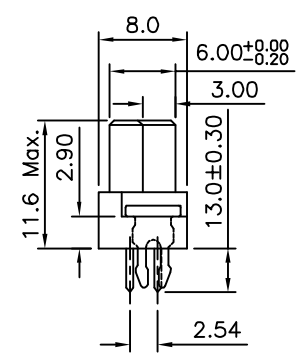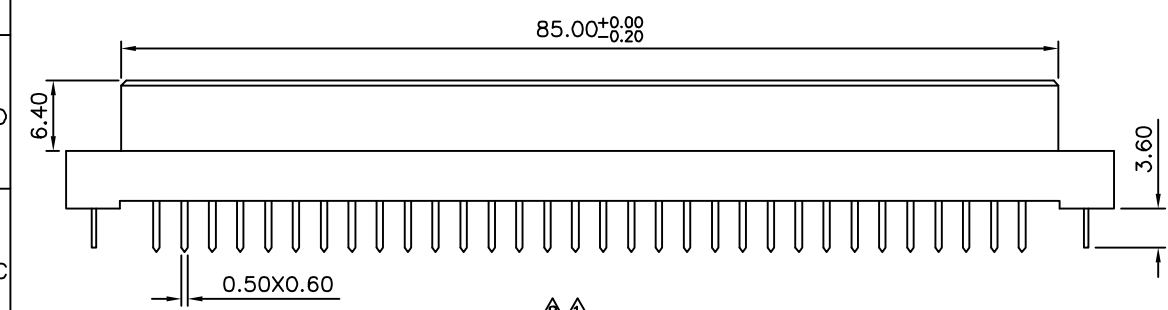

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.5 .X ±0.25 .XX ±0.15
09972		MEI		
		CHECKED BY HZF		
		DRAWING BY SONG		UNIT mm
SCALE	NONE	REV.	A2	

NO. REV.	REVISIONS	CHK	DATE
△ A2	Modify Data	HZF	09/23/2013
△ A1	Modify Data	HZF	09/01/2011
△ A0	NEW RELEASE	HZF	02/20/2009