File No.	307	SHEET	1/1

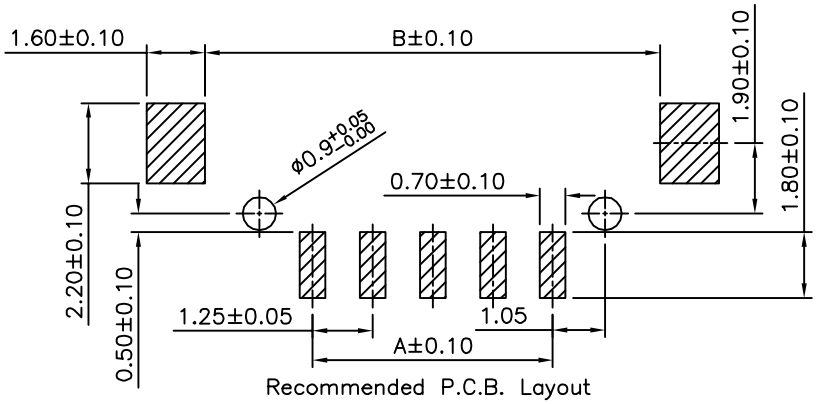

Recommended P.C.B. Layout

SPECIFICATION

Current Rating:1A DC/AC
Voltage Rating:100 DC/AC
Withstand Voltage:500V AC/Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:500 Megaohms Min.
Temperature Range:−25˚C~+85˚C
Insulator:PA6T(UL94V−0)
Contact:Phosphor Bronze,Tin Plated
Solder Tabs:Brass,Tin Plated
RoHS Compliant

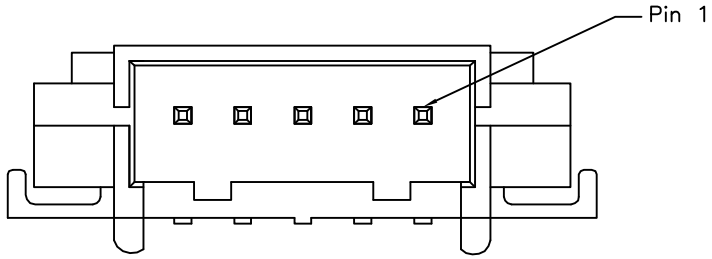

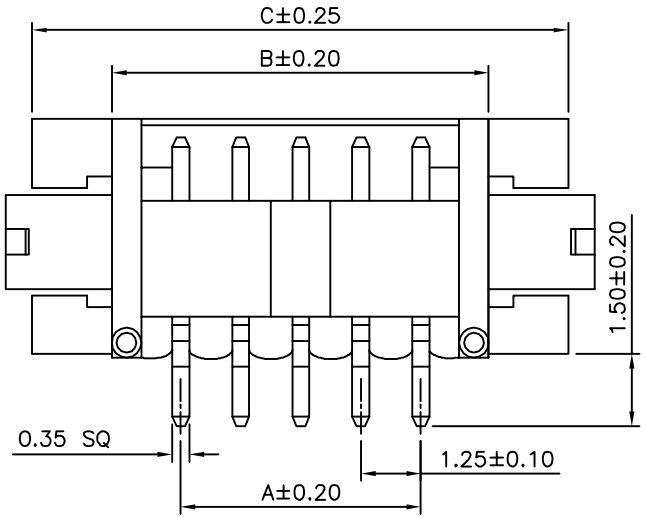

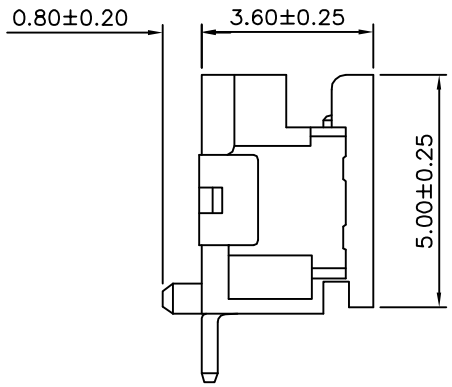

Pin	A	B	C
2	1.25	4.15	6.25
3	2.50	5.40	7.50
4	3.75	6.65	8.75
5	5.00	7.90	10.00
6	6.25	9.15	11.25
7	7.50	10.40	12.50
8	8.75	11.65	13.75
9	10.00	12.90	15.00
10	11.25	14.15	16.25
11	12.50	15.40	17.50
12	13.75	16.65	18.75
13	15.00	17.90	20.00
14	16.25	19.15	21.25
15	17.50	20.40	22.50

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.	APPROVED BY	EMILY	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
09994	CHECKED BY	HZF	.X ±0.25
	DRAWING BY	GAO	.XX ±0.15
			ANG.
SCALE NONE	REV.	A0	UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
0	A0	NEW RELEASE	HZF	12/05/2011