

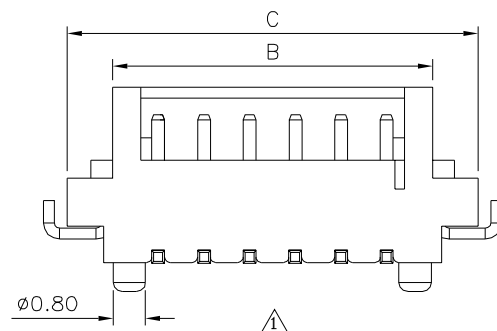
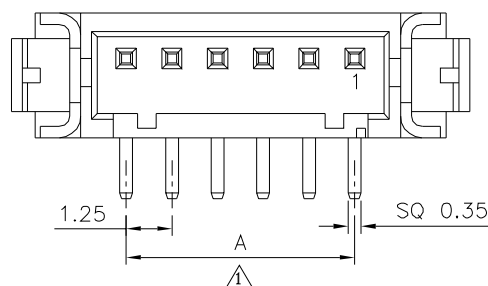


# SPECIFICATION

Current Rating:1A DC/AC  
Voltage Rating:100V DC/AC  
Withstand Voltage:500V AC/Minute  
Contact Resistance:20 Milliohms Max.  
Insulation Resistance:500 Megaohms Min.  
Temperature Range:-25°C~+85°C  
Insulator:PA6T(UL94V-0)  
Contact:Phosphor Bronze,Tin Plated  
Solder Tabs:Brass,Tin Plated  
RoHS Compliant

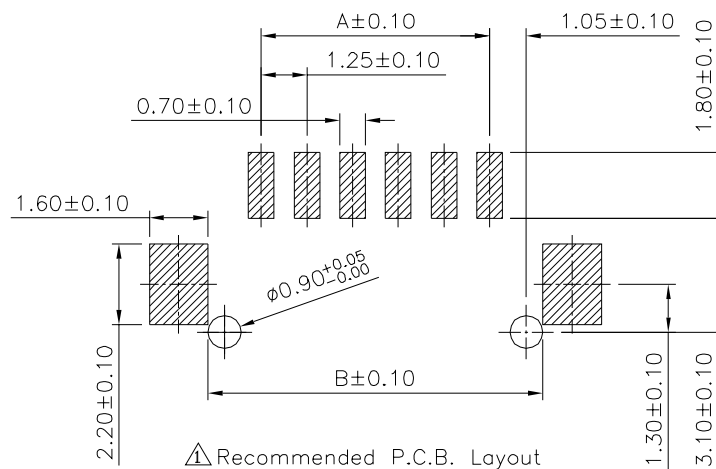

| Pin | A     | B     | C     |
|-----|-------|-------|-------|
| 2   | 1.25  | 4.15  | 6.25  |
| 3   | 2.50  | 5.40  | 7.50  |
| 4   | 3.75  | 6.65  | 8.75  |
| 5   | 5.00  | 7.90  | 10.00 |
| 6   | 6.25  | 9.15  | 11.25 |
| 7   | 7.50  | 10.40 | 12.50 |
| 8   | 8.75  | 11.65 | 13.75 |
| 9   | 10.00 | 12.90 | 15.00 |
| 10  | 11.25 | 14.15 | 16.25 |
| 11  | 12.50 | 15.40 | 17.50 |
| 12  | 13.75 | 16.65 | 18.75 |
| 13  | 15.00 | 17.90 | 20.00 |
| 14  | 16.25 | 19.15 | 21.25 |
| 15  | 17.50 | 20.40 | 22.50 |

**4UCON** 元化興業股份有限公司  
4UCON TECHNOLOGY INC.

DRAWING No. 10006

10006

SCALE

NONE

REV.

A1

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

CYP

UNLESS OTHERWISE  
SPECIFIED  
TOLERANCES ARE  
.X ±0.25  
.XX ±0.15  
ANG.

UNIT  
mm



NO. REV.

A1 Modify Data

HZF

01/05/2015

NO. REV.

A0 NEW RELEASE

HZF

02/06/2012

REVISIONS

CHK

DATE