
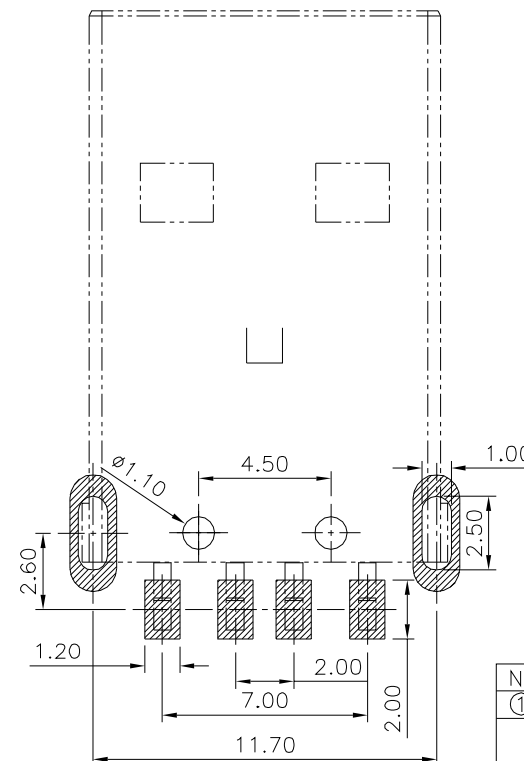
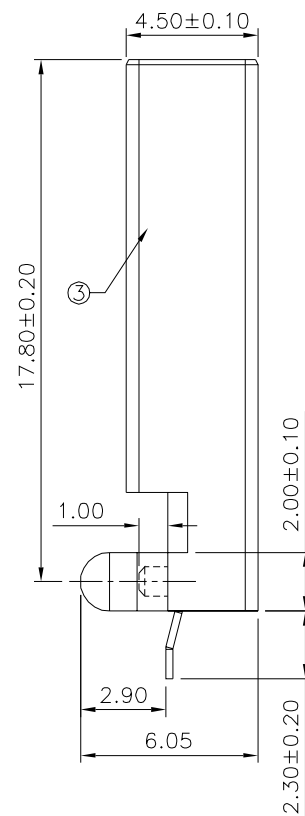
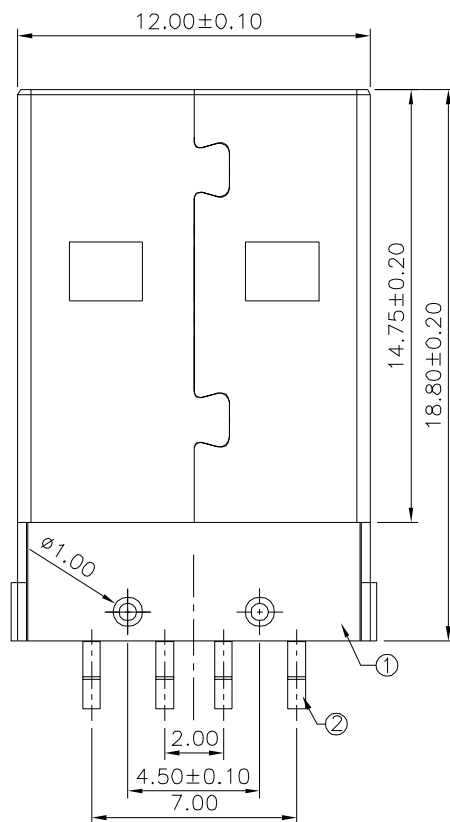


# SPECIFICATION

Current Rating: 1A Max.  
 Dielectric Withstanding Voltage: 30V AC  
 For 1 Minute  
 Insulation Resistance: 1000 Megaohms Min.  
 At DC 500V  
 Contact Resistance: 30 Milliohms Max.  
 Temperature Range: -55°C~+105°C  
 RoHS Compliant

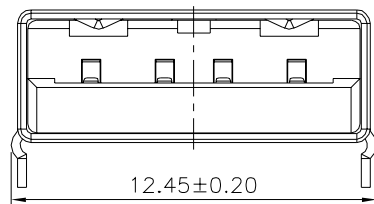

| No. | Name    | Q'ty | Material          | Remark                                                                    |
|-----|---------|------|-------------------|---------------------------------------------------------------------------|
| ①   | Housing | 1    | LCP(UL94V-0)      | Black                                                                     |
| ②   | Contact | 4    | Brass             | Gold Flash On Contact Area,<br>Tin Plated On Solder Tails,<br>Over Nickel |
| ③   | Shell   | 1    | Cold Rolled Steel | Nickel Plated Over Copper                                                 |

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.

10019

SCALE NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY


CYP

REV.

BO

UNLESS OTHERWISE  
 SPECIFIED  
 TOLERANCES ARE  
 .X ±0.30  
 .XX ±0.20  
 .XXX ±0.10  
 ANG. ±1°

UNIT  
 mm



NO. REV.

BO Modify Data

BO NEW RELEASE

REVISIONS

HZF

HZF

CHK

09/08/2015

09/08/2015

DATE