
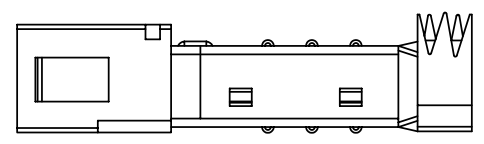

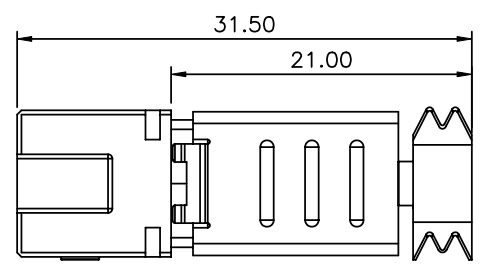








SPECIFICATION:
 Current Rating:1.5A
 Voltage:30V
 Contact Resistance:50Milliohms Max.
 Shell Resistance:50Milliohms
 Insulation Resistance:100Megohms Min
 Dielectric Withstand:100V DC
 Operating Temperature:-40°C~+85°C
 Storage Temperature:-40°C~+105°C
 RoHS Compliant



4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.


DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.15 .X* ±1.0* .XX ±0.10 .XX* ±0.5* .XXX ±0.05 .XXX* ±0.2*
10020		MEI		
		CHECKED BY	HZF	
		DRAWING BY	JLT	
SCALE	NONE	REV.	A1	UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△	A1	Modify Drawing	HZF	09/12/2008
△	A0	NEW RELEASE	HZF	08/25/2007




Plug Kit

Housing: Thermoplastic,G.F.UL 94V-0
 Upper Piece And Lower Piece
 Thermoplastic,G.F.UL 94V-0
 Contact: C5191R-H
 Finish: 30u" Au Over 50u" Ni




Bilingual Cover





Material: Thermoplastic(UL94V-0)

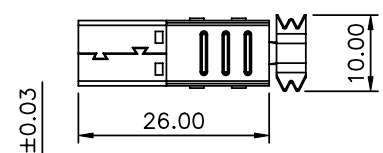

Material: SPCC t=0.30mm±0.02
 Finish: Tin Plated Over Nickel

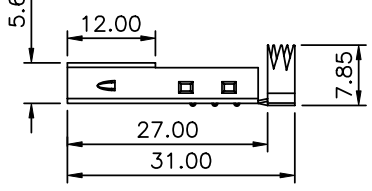

Main Shell

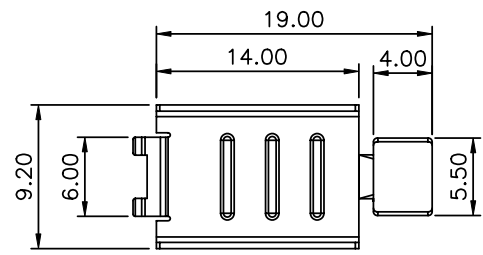

Upper Shell

Material: SPCC t=0.30mm±0.02
 Finish: Tin Plated Over Nickel

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED					
10020		MEI		TOLERANCES ARE					
		CHECKED BY		.X ±0.15 .X* ±1.0°					
		HZF		.XX ±0.10 .XX* ±0.5°					
		DRAWING BY		.XXX ±0.05 .XXX* ±0.2°					
		JLT		UNIT		△ A1	Modify Drawing	HZF	09/12/2008
SCALE		NONE		REV.		△ A0	NEW RELEASE	HZF	08/25/2007
				A1		NO.	REV.	REVISIONS	CHK
								DATE	