
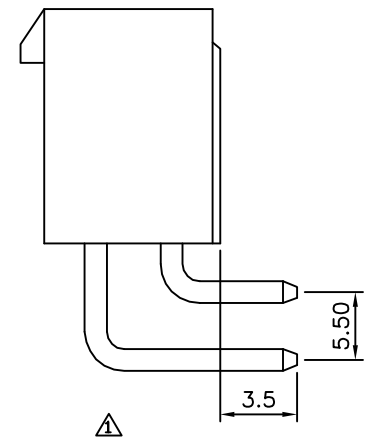
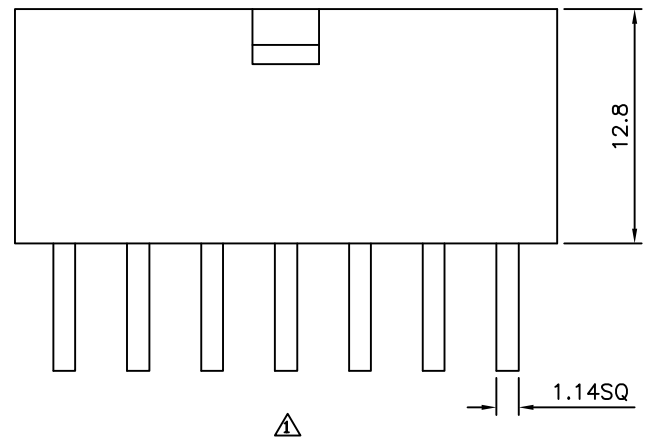


△ SPECIFICATION
 Current Rating:8A AC/DC
 Voltage Rating:500V AC/DC
 Withstand Voltage:1500V AC/Minute
 Insulation Resistance:1000 Megaohms Min.
 Temperature Range:-25°C~+85°C
 Insulator:PA66(UL94V-2),Nature
 Contact:Brass,Tin Plated
 Applicable PC Board Thickness:1.6mm
 RoHS Compliant

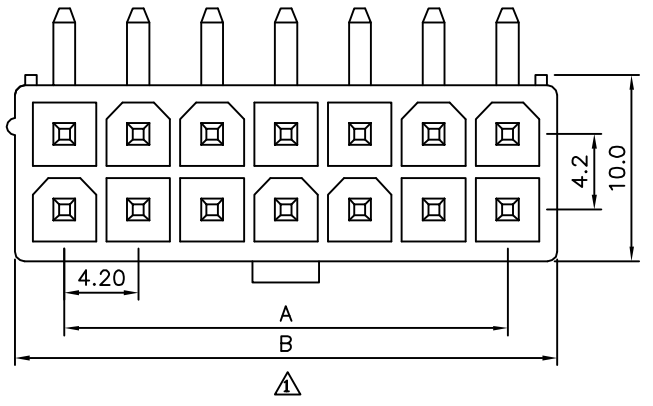

△

| Pin | A | B |
|-----|-------|------|
| 02 | | 5.2 |
| 04 | 4.20 | 9.4 |
| 06 | 8.40 | 13.6 |
| 08 | 12.60 | 17.8 |
| 10 | 16.80 | 22.0 |
| 12 | 21.00 | 26.2 |
| 14 | 25.20 | 30.4 |
| 16 | 29.40 | 34.6 |
| 18 | 33.60 | 38.8 |
| 20 | 37.80 | 43.0 |
| 22 | 42.00 | 47.2 |
| 24 | 46.20 | 51.4 |

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

| | | | | |
|-------------|------|-------------|----|--|
| DRAWING No. | | APPROVED BY | | UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.5 .X ±0.25 .XX ±0.2 .XXX ±0.08 |
| 10129 | | EMILY | | |
| | | CHECKED BY | | |
| | | HZF | | |
| | | DRAWING BY | | UNIT mm |
| | | HAO | | |
| SCALE | NONE | REV. | A1 | △ |

| | | | | |
|------|------|-------------|-----|------------|
| NO. | REV. | REVISIONS | CHK | DATE |
| △ A1 | | Modify Data | HZF | 11/25/2014 |
| △ A0 | | NEW RELEASE | | |