


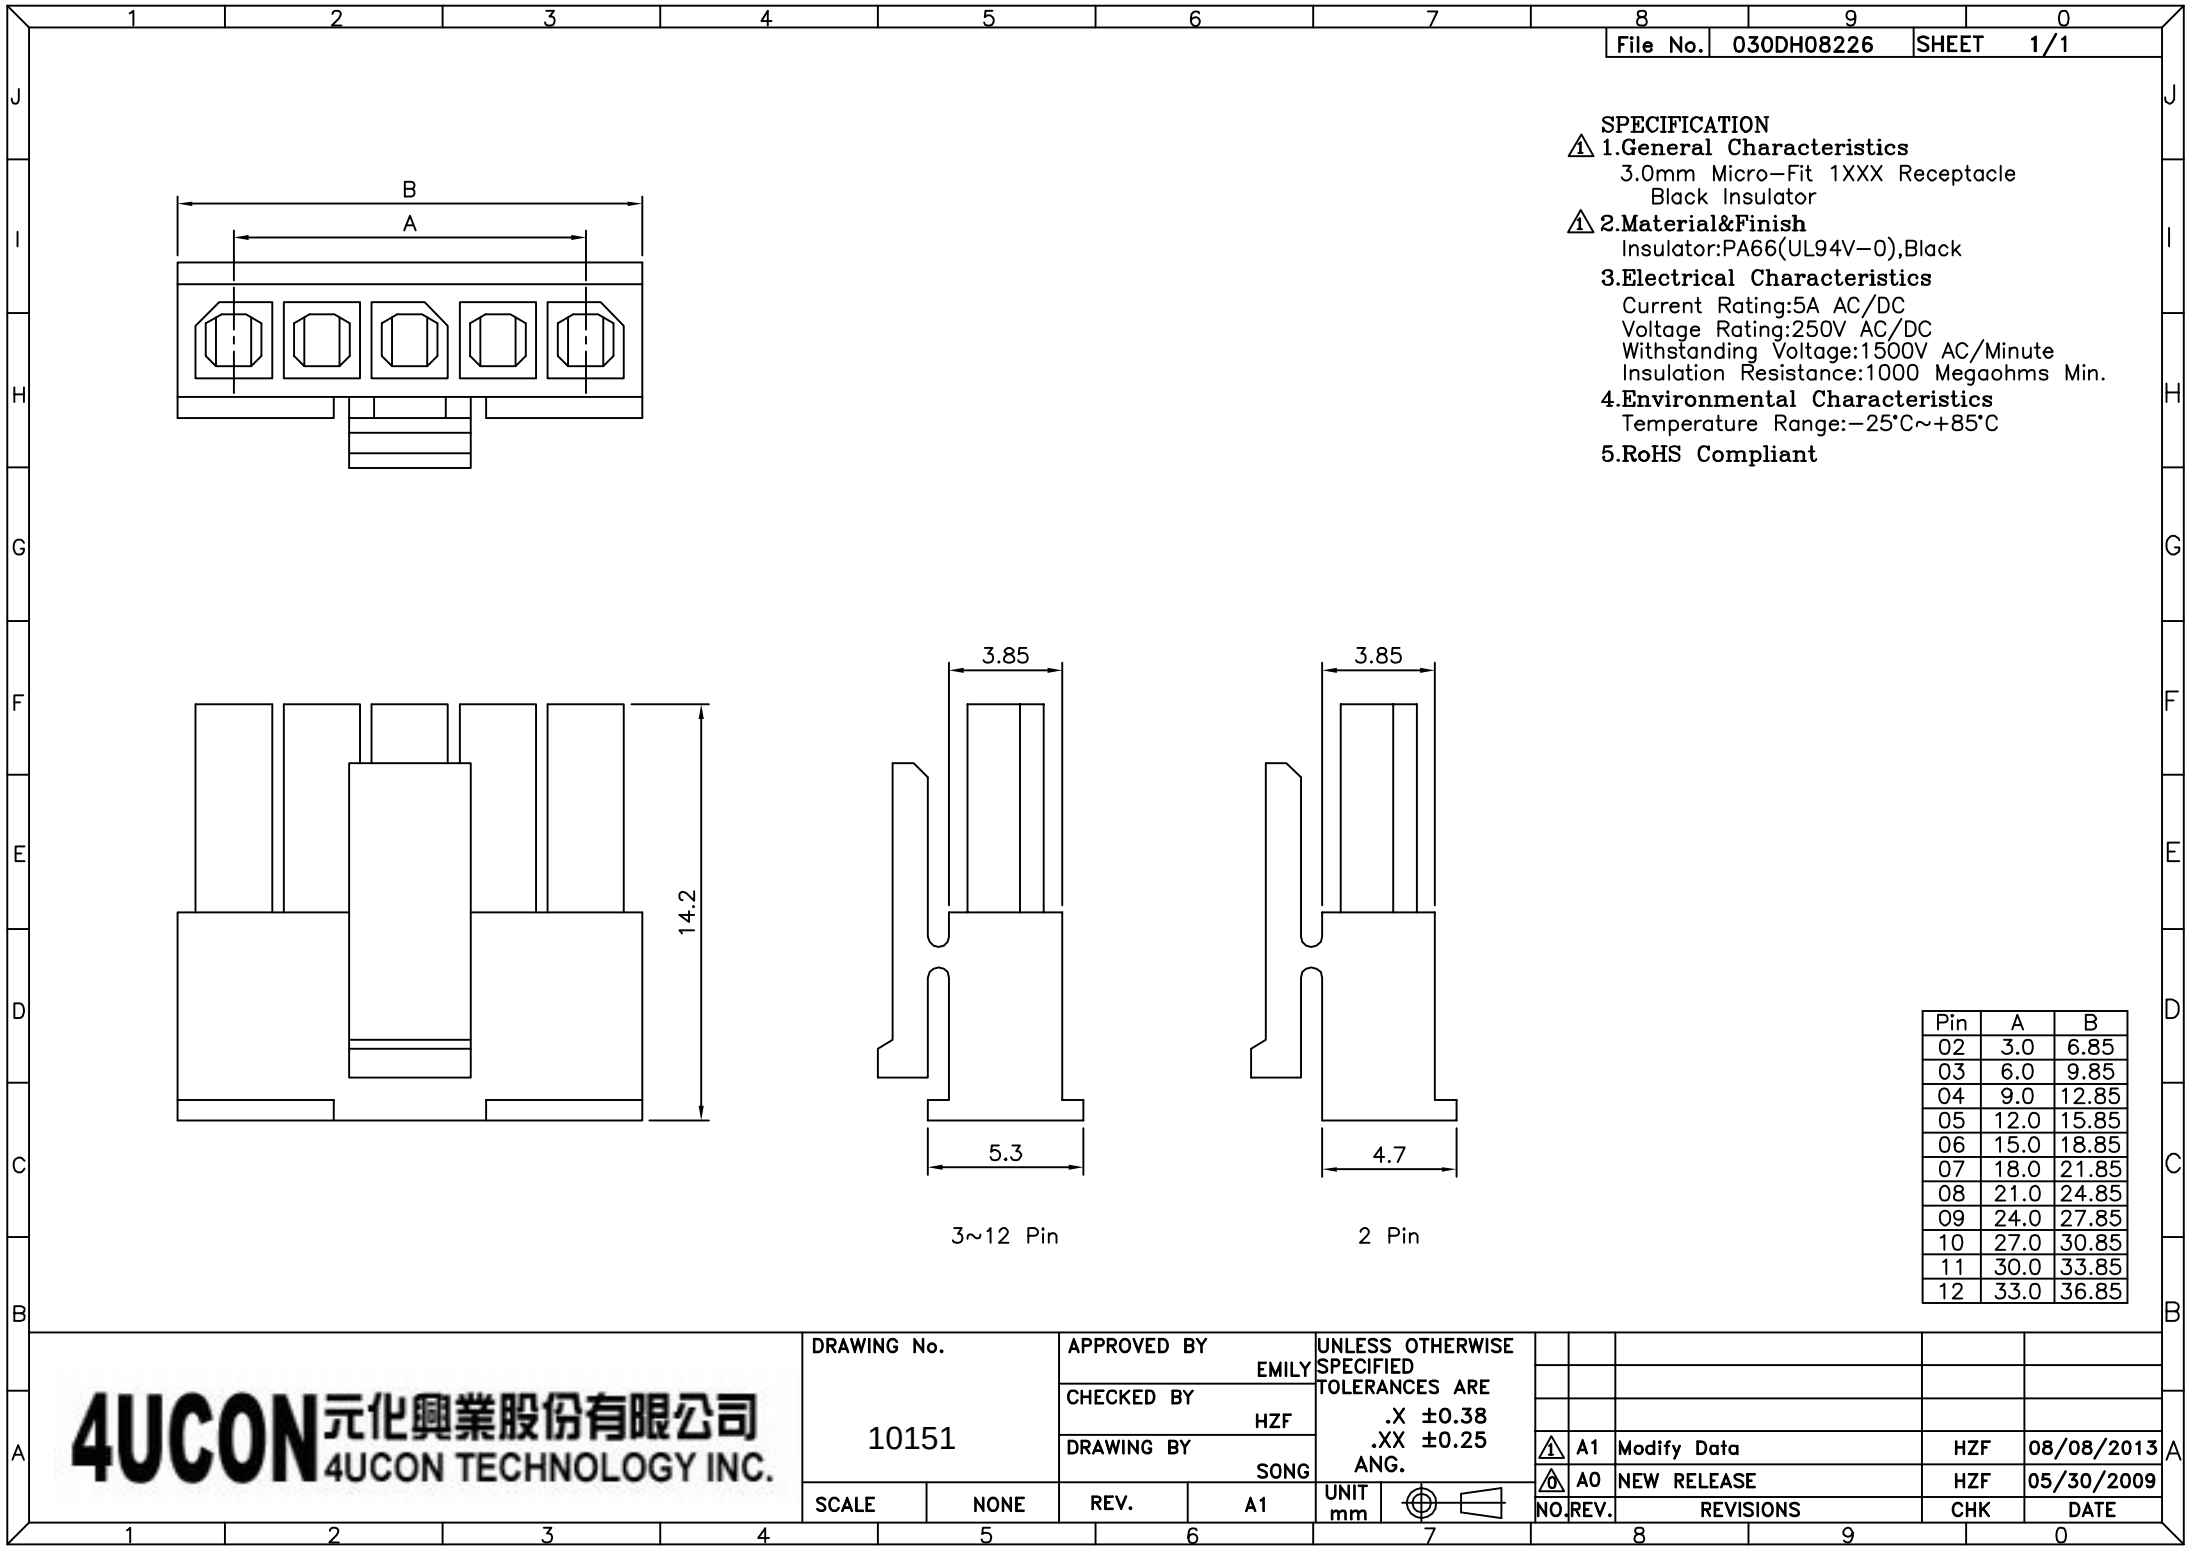

- SPECIFICATION
- ⚠ 1.General Characteristics  
3.0mm Micro-Fit 1XXX Receptacle  
Black Insulator
- ⚠ 2.Material&Finish  
Insulator:PA66(UL94V-0),Black
- 3.Electrical Characteristics  
Current Rating:5A AC/DC  
Voltage Rating:250V AC/DC  
Withstanding Voltage:1500V AC/Minute  
Insulation Resistance:1000 Megaohms Min.
- 4.Environmental Characteristics  
Temperature Range:-25°C~+85°C
- 5.RoHS Compliant

| Pin | A    | B     |
|-----|------|-------|
| 02  | 3.0  | 6.85  |
| 03  | 6.0  | 9.85  |
| 04  | 9.0  | 12.85 |
| 05  | 12.0 | 15.85 |
| 06  | 15.0 | 18.85 |
| 07  | 18.0 | 21.85 |
| 08  | 21.0 | 24.85 |
| 09  | 24.0 | 27.85 |
| 10  | 27.0 | 30.85 |
| 11  | 30.0 | 33.85 |
| 12  | 33.0 | 36.85 |

|                          |      |                      |    |
|--------------------------|------|----------------------|----|
| DRAWING No.<br><br>10151 |      | APPROVED BY<br>EMILY |    |
|                          |      | CHECKED BY<br>HZF    |    |
|                          |      | DRAWING BY<br>SONG   |    |
| SCALE                    | NONE | REV.                 | A1 |

|                                                                                  |  |      |    |
|----------------------------------------------------------------------------------|--|------|----|
| UNLESS OTHERWISE<br>SPECIFIED<br>TOLERANCES ARE<br>.X ±0.38<br>.XX ±0.25<br>ANG. |  | UNIT | mm |
|                                                                                  |  |      |    |
|                                                                                  |  |      |    |

|      |      |             |     |            |
|------|------|-------------|-----|------------|
| NO.  | REV. | REVISIONS   | CHK | DATE       |
| ⚠ A1 |      | Modify Data | HZF | 08/08/2013 |
| ⚠ A0 |      | NEW RELEASE | HZF | 05/30/2009 |