


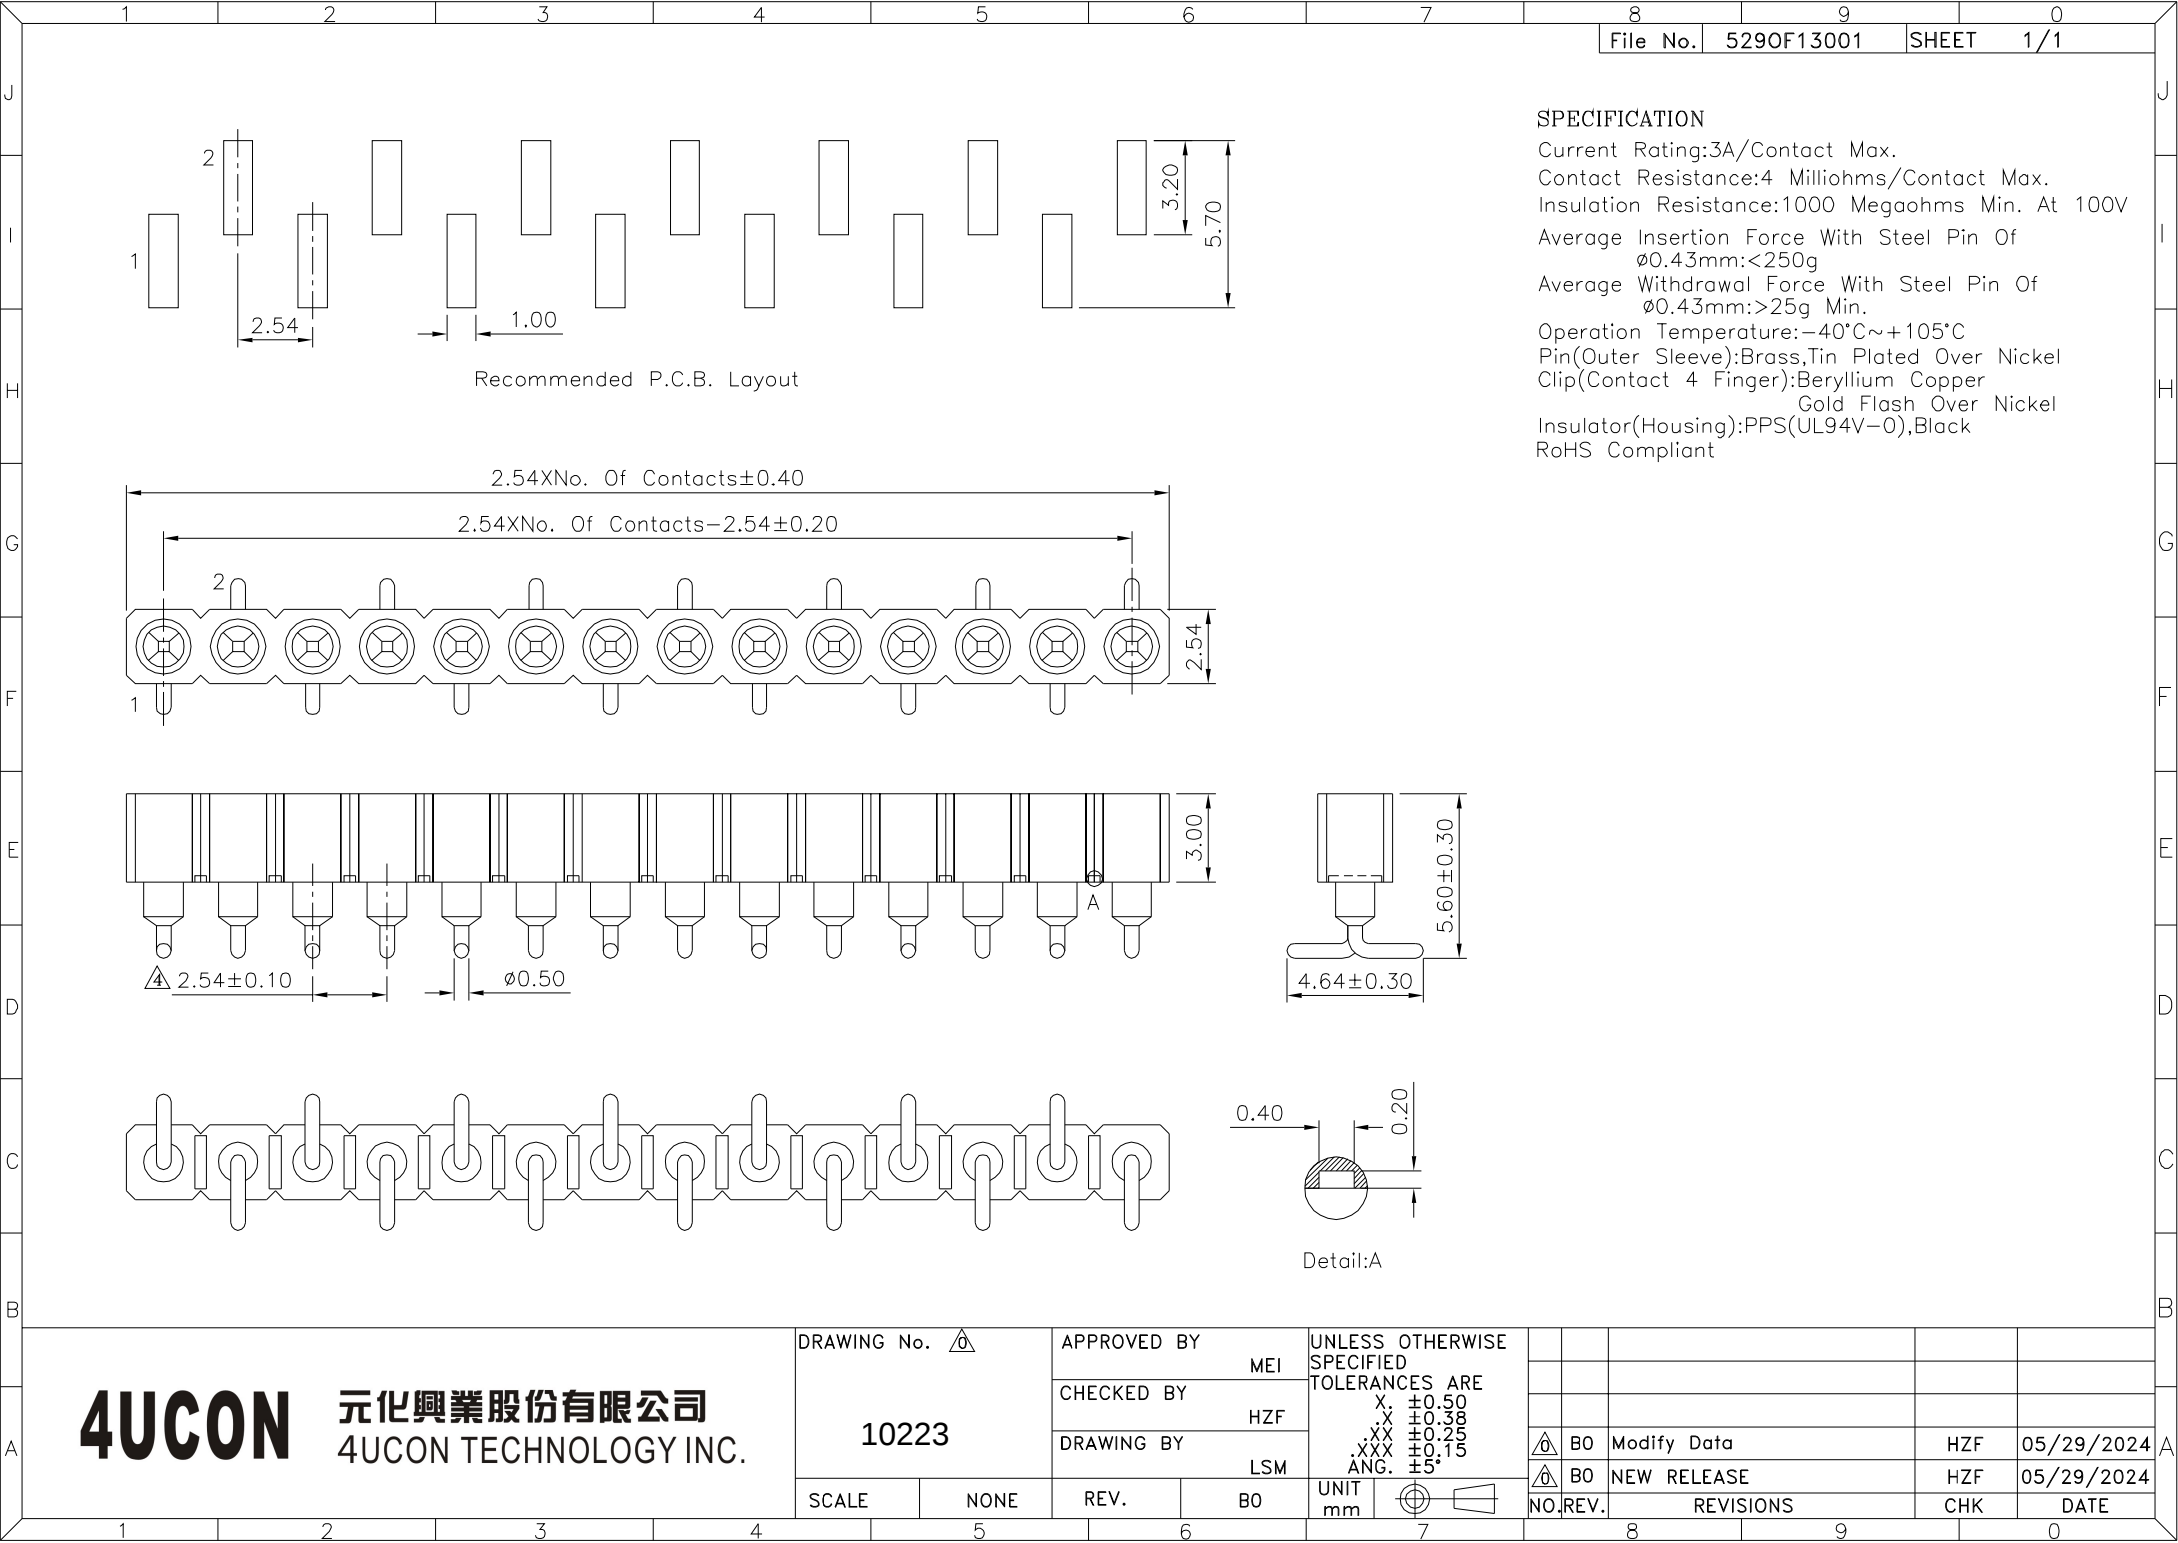

**SPECIFICATION**

Current Rating:3A/Contact Max.  
Contact Resistance:4 Milliohms/Contact Max.  
Insulation Resistance:1000 Megaohms Min. At 100V  
Average Insertion Force With Steel Pin Of  
    ø0.43mm:<250g  
Average Withdrawal Force With Steel Pin Of  
    ø0.43mm:>25g Min.  
Operation Temperature:-40°C~+105°C  
Pin(Outer Sleeve):Brass,Tin Plated Over Nickel  
Clip(Contact 4 Finger):Beryllium Copper  
    Gold Flash Over Nickel  
Insulator(Housing):PPS(UL94V-0),Black  
RoHS Compliant

**4Ucon** 元化興業股份有限公司  
4Ucon TECHNOLOGY INC.

DRAWING No. 10223

APPROVED BY MEI  
CHECKED BY HZF  
DRAWING BY LSM

SCALE NONE REV. BO

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE  
X. ±0.50  
XX ±0.38  
XXX ±0.25  
ANG. ±5°

UNIT mm

|     |      |             |     |            |
|-----|------|-------------|-----|------------|
| NO. | REV. | REVISIONS   | CHK | DATE       |
| △   | BO   | Modify Data | HZF | 05/29/2024 |
| △   | BO   | NEW RELEASE | HZF | 05/29/2024 |