


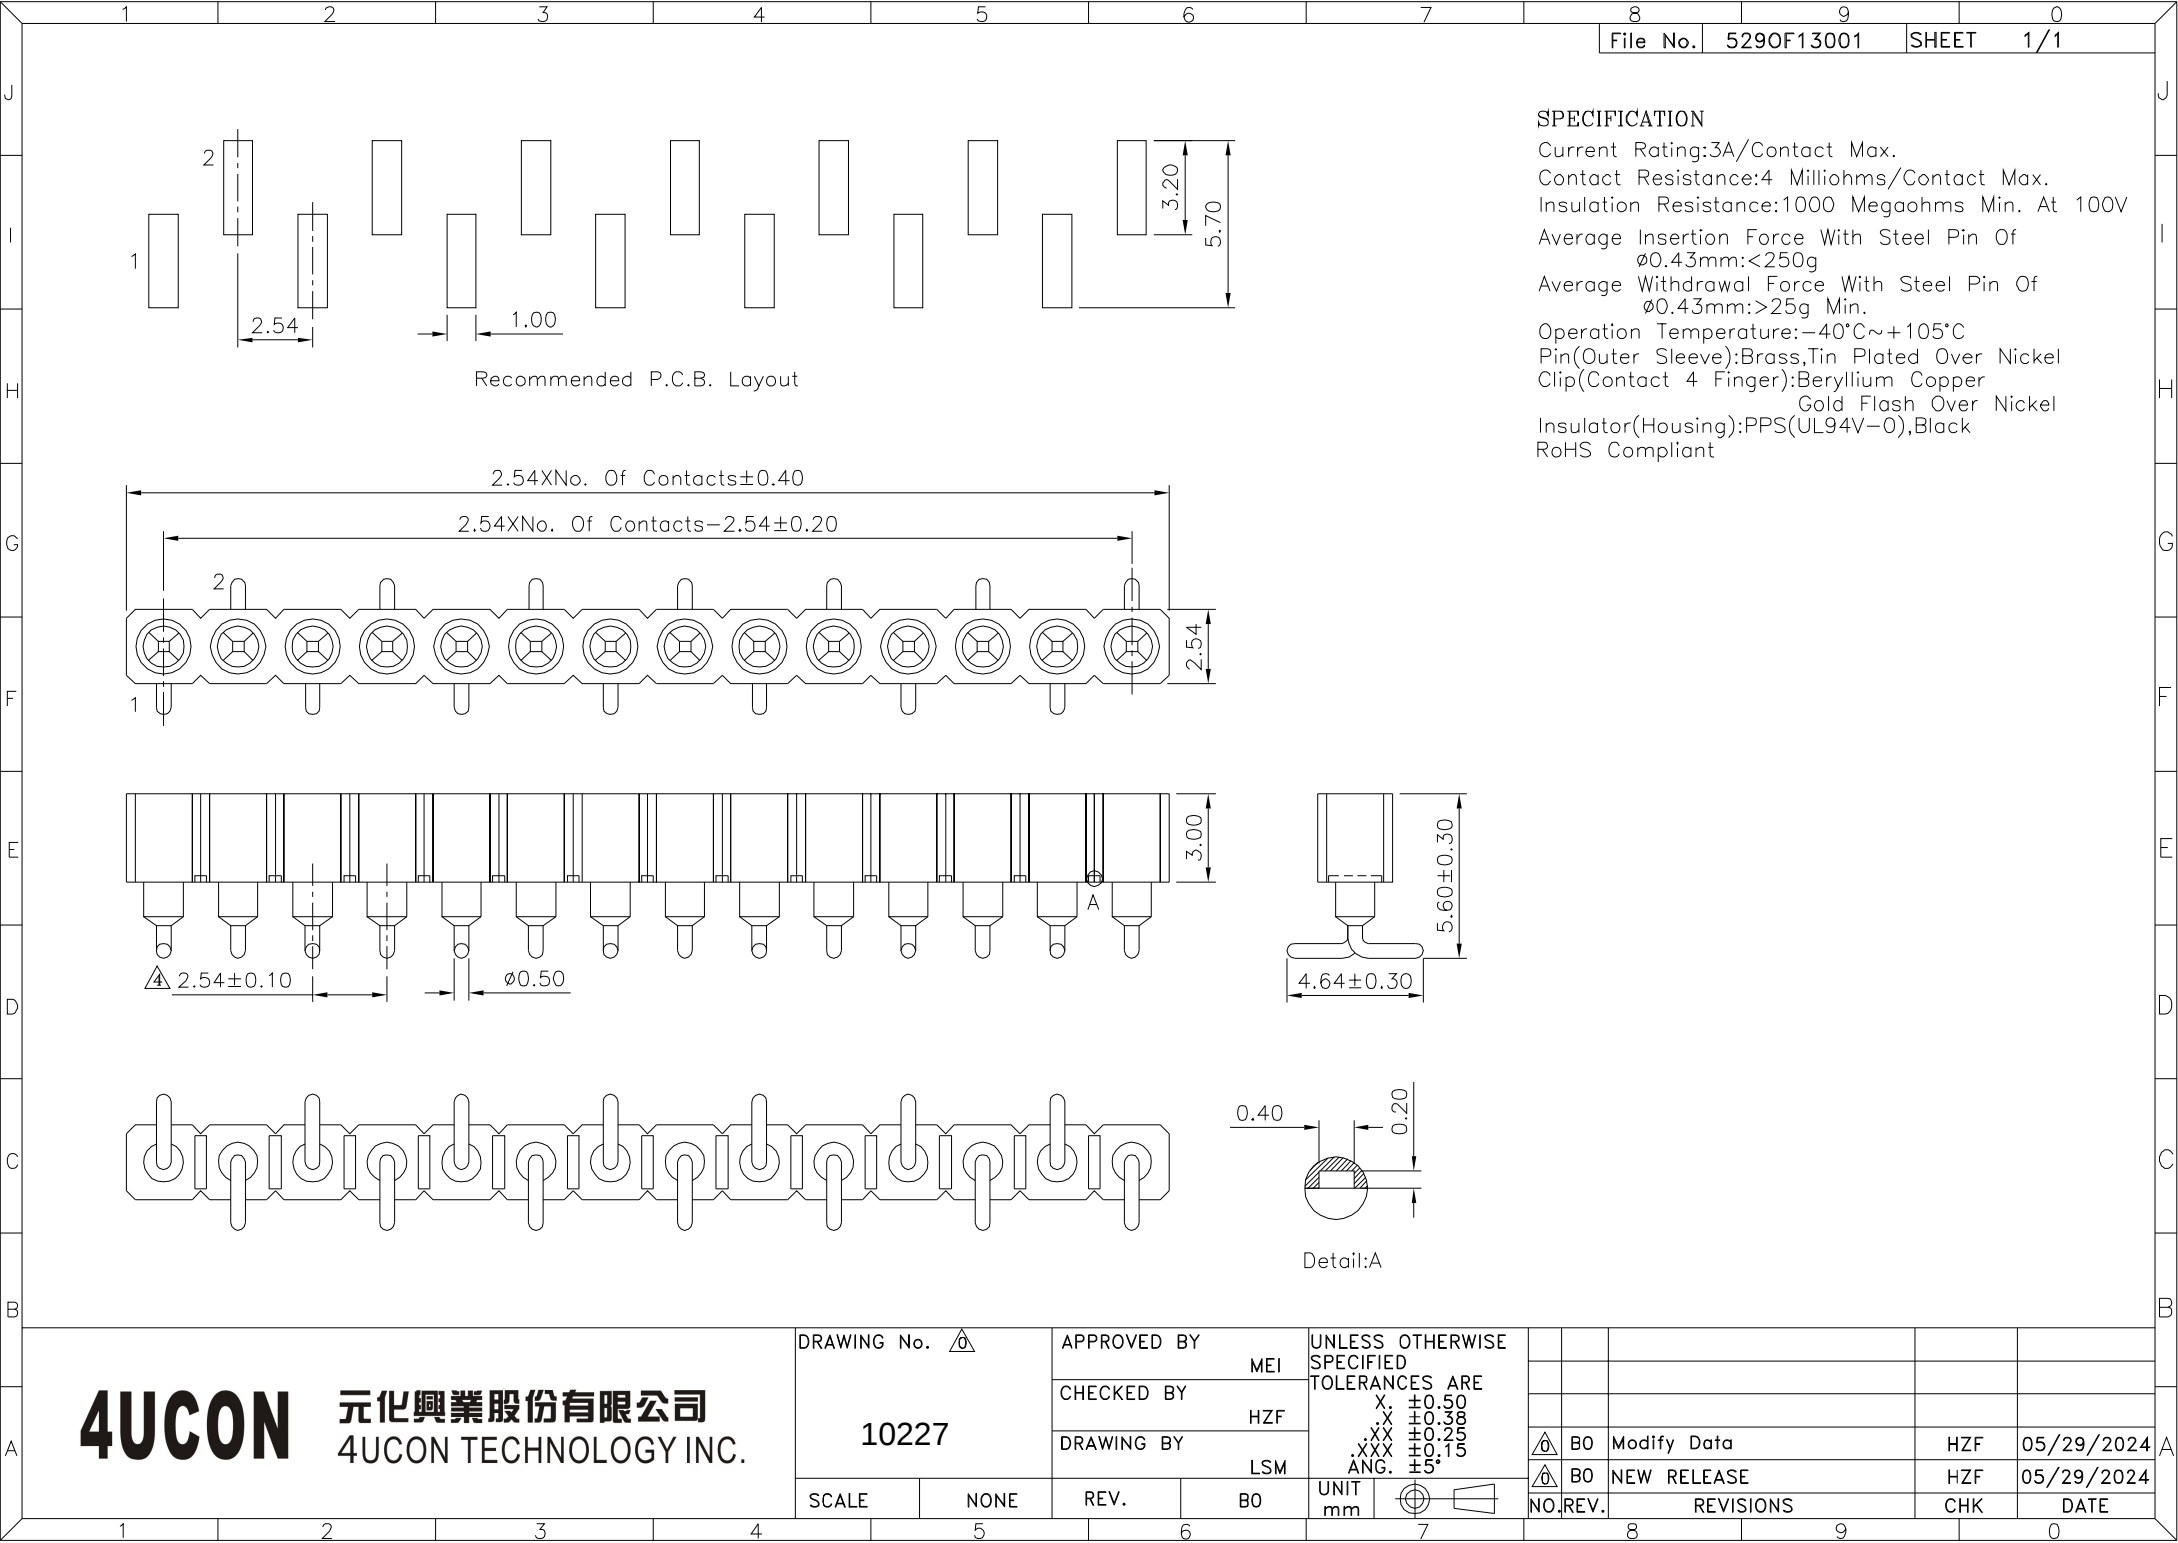

SPECIFICATION

Current Rating:3A/Contact Max.
Contact Resistance:4 Milliohms/Contact Max.
Insulation Resistance:1000 Megaohms Min. At 100V
Average Insertion Force With Steel Pin Of
 ø0.43mm:<250g
Average Withdrawal Force With Steel Pin Of
 ø0.43mm:>25g Min.
Operation Temperature:-40°C~+105°C
Pin(Outer Sleeve):Brass,Tin Plated Over Nickel
Clip(Contact 4 Finger):Beryllium Copper
 Gold Flash Over Nickel
Insulator(Housing):PPS(UL94V-0),Black
RoHS Compliant

4U CON 元化興業股份有限公司
4U CON TECHNOLOGY INC.

DRAWING No. 10227

APPROVED BY MEI
CHECKED BY HZF
DRAWING BY LSM

SCALE NONE REV. BO

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
X. ±0.50
XX ±0.38
XXX ±0.25
ANG. ±5°

UNIT mm

△	BO	Modify Data	HZF	05/29/2024	
△	BO	NEW RELEASE	HZF	05/29/2024	
NO.	REV.	REVISIONS	CHK	DATE	