


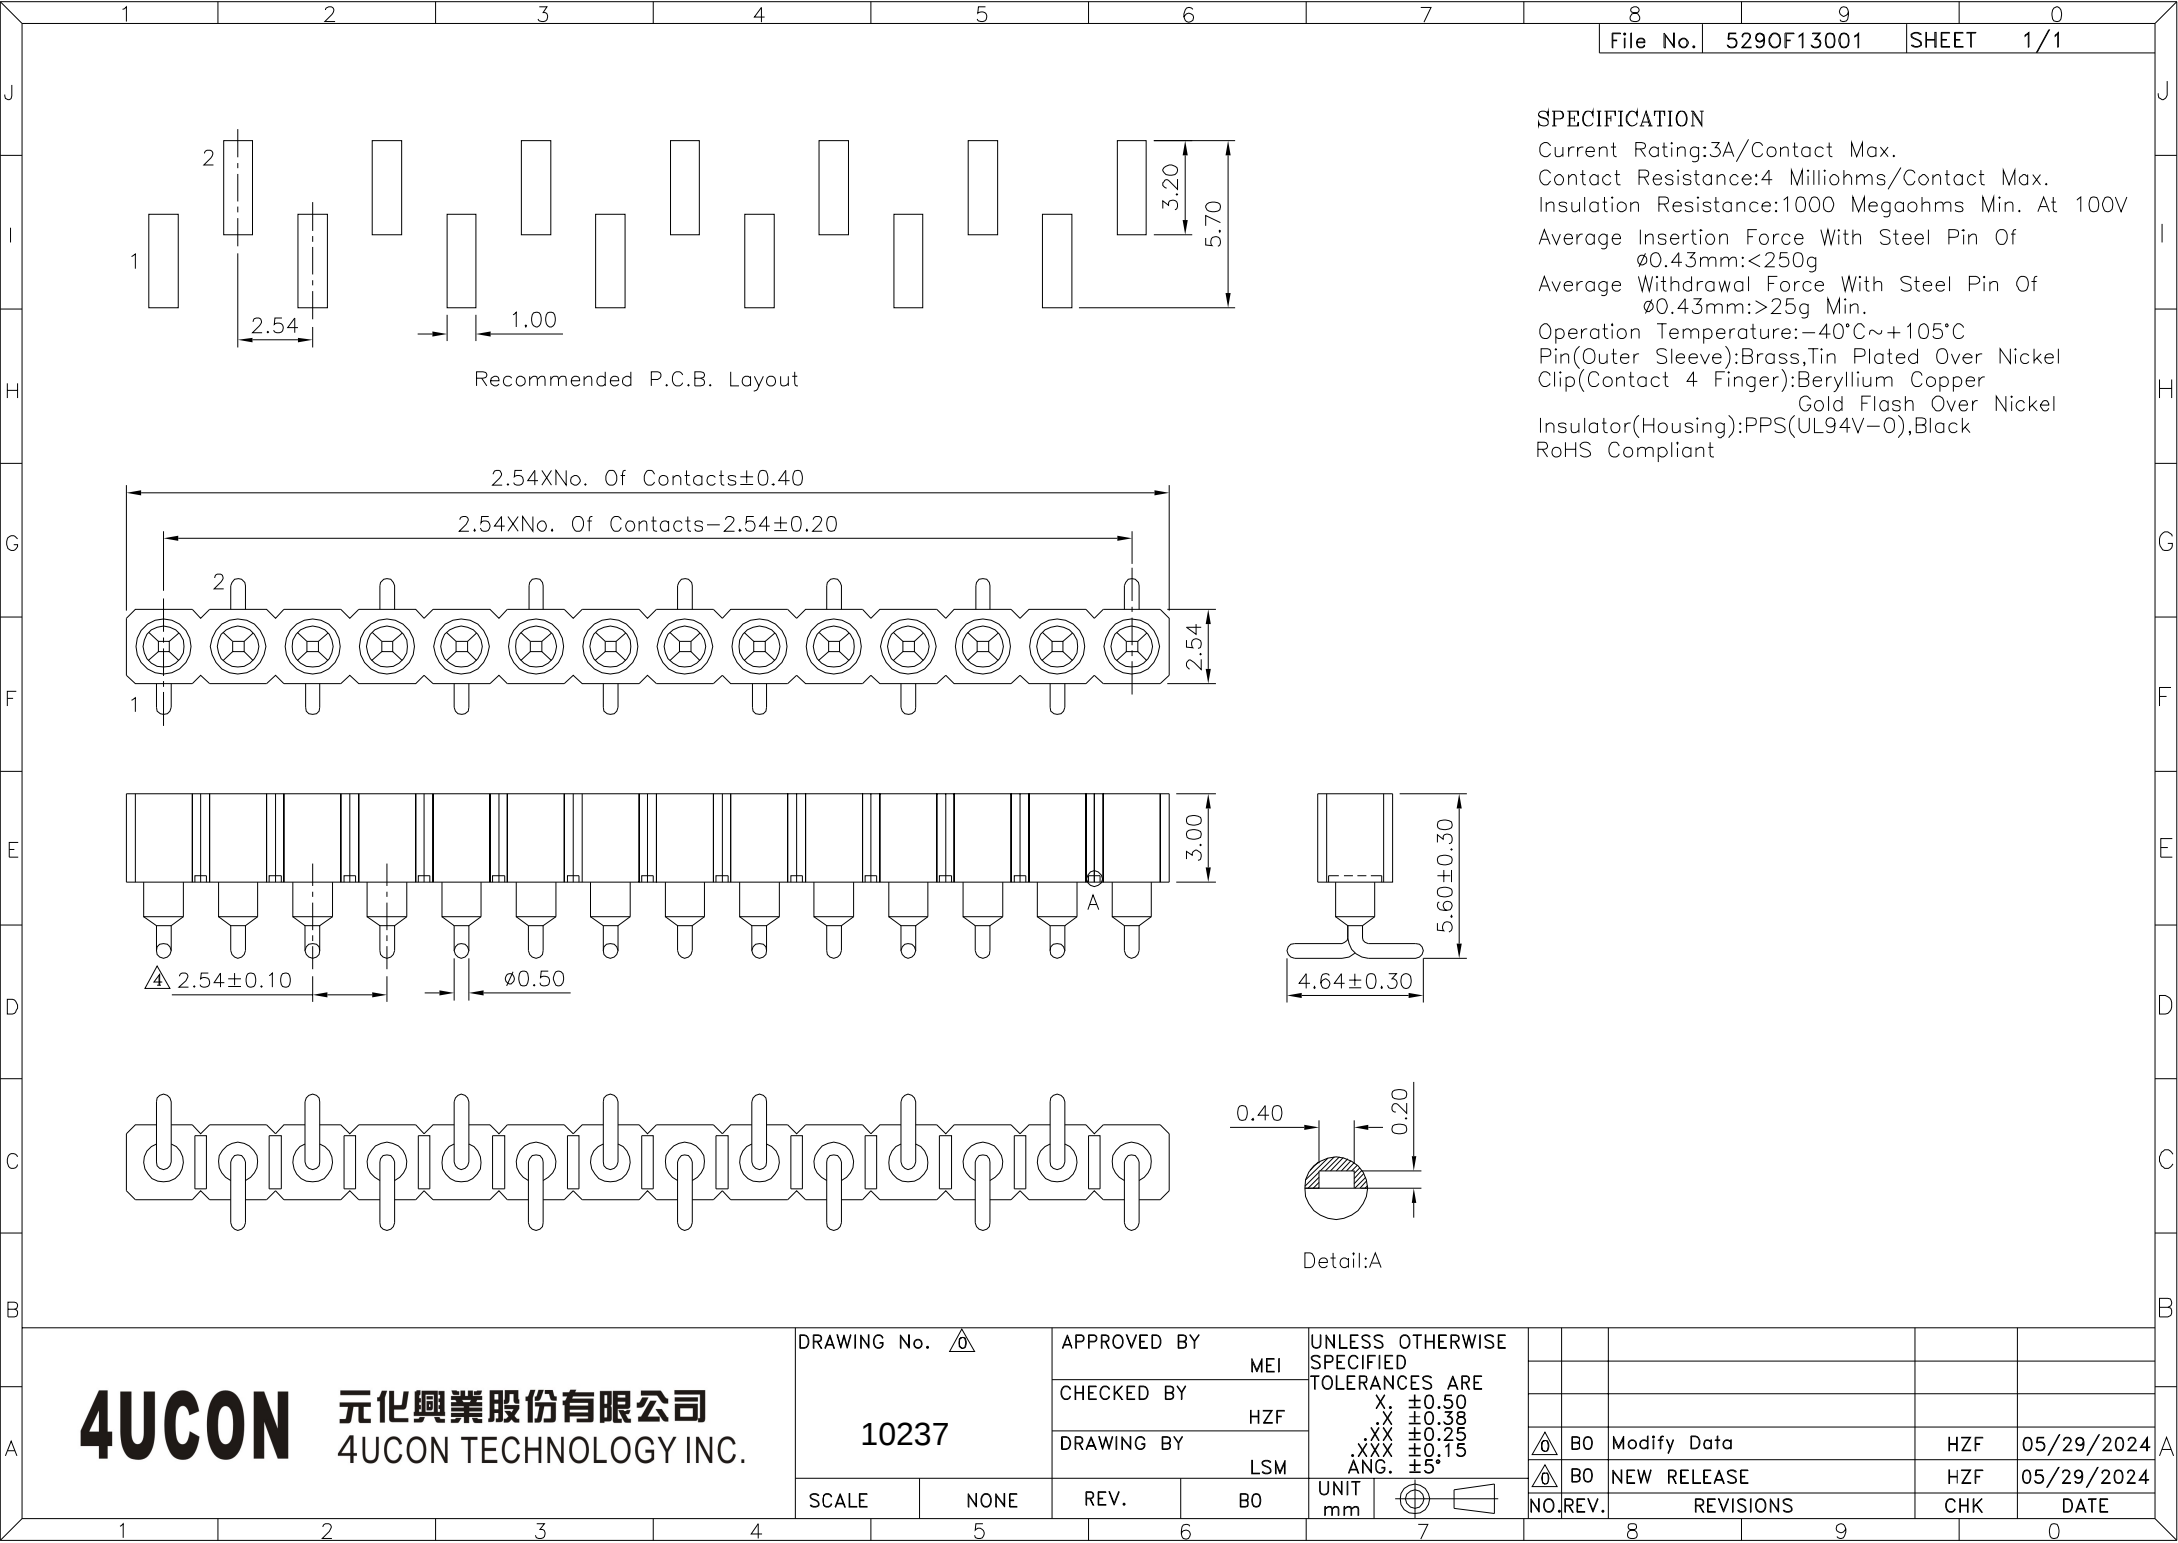

SPECIFICATION

Current Rating:3A/Contact Max.
Contact Resistance:4 Milliohms/Contact Max.
Insulation Resistance:1000 Megaohms Min. At 100V
Average Insertion Force With Steel Pin Of
 ø0.43mm:<250g
Average Withdrawal Force With Steel Pin Of
 ø0.43mm:>25g Min.
Operation Temperature:-40°C~+105°C
Pin(Outer Sleeve):Brass,Tin Plated Over Nickel
Clip(Contact 4 Finger):Beryllium Copper
 Gold Flash Over Nickel
Insulator(Housing):PPS(UL94V-0),Black
RoHS Compliant

4Ucon 元化興業股份有限公司
4Ucon TECHNOLOGY INC.

DRAWING No. 10237

APPROVED BY	MEI
CHECKED BY	HZF
DRAWING BY	LSM
SCALE	NONE
REV.	B0

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

X.	±0.50
.X.	±0.38
.XX	±0.25
.XXX	±0.15
ANG.	±5°

	B0	Modify Data	HZF	05/29/2024	
	B0	NEW RELEASE	HZF	05/29/2024	
NO.	REV.	REVISIONS	CHK	DATE	