
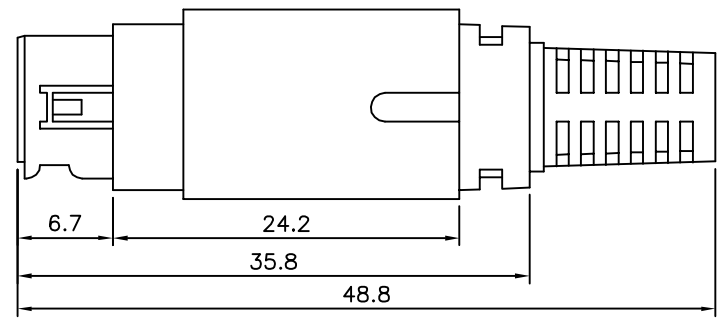



SPECIFICATION
 Rating:100V AC Max. Or 12V DC 2A Max.
 Withstanding Voltage:250V AC At 1 Minute
 Insulation Resistance:50 Megaohms Min.
 At 250V DC

RoHS Compliant

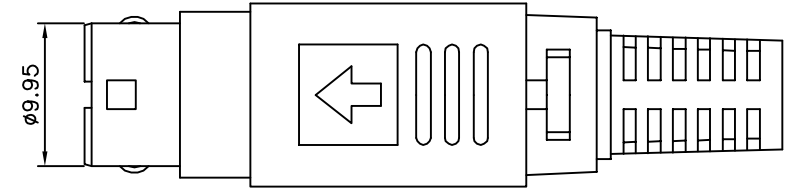

⑩	SR	PVC	_____
⑨	Plastic Tube	ABS	_____
⑧	Spring	Steel	_____
⑦	POM Ring	POM	_____
⑥	Pin	Brass	Silver Plated Over Nickel
⑤	Housing	PBT	_____
④	Cable Fixer	Brass	Tin Plated
③	Cap	Brass	Nickel Plated
②	Shell	Brass	Nickel Plated
①	Plastic Cover	ABS	_____
No.	Name	Material	Finish

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.1 .XX ±0.05 ANG.
10239		MEI		
		CHECKED BY		
		HZF		
		DRAWING BY		
		SAN		
SCALE	NONE	REV.	A0	UNIT
				mm

NO.	REV.	REVISIONS	CHK	DATE
△ A0		NEW RELEASE	HZF	10/30/2013