


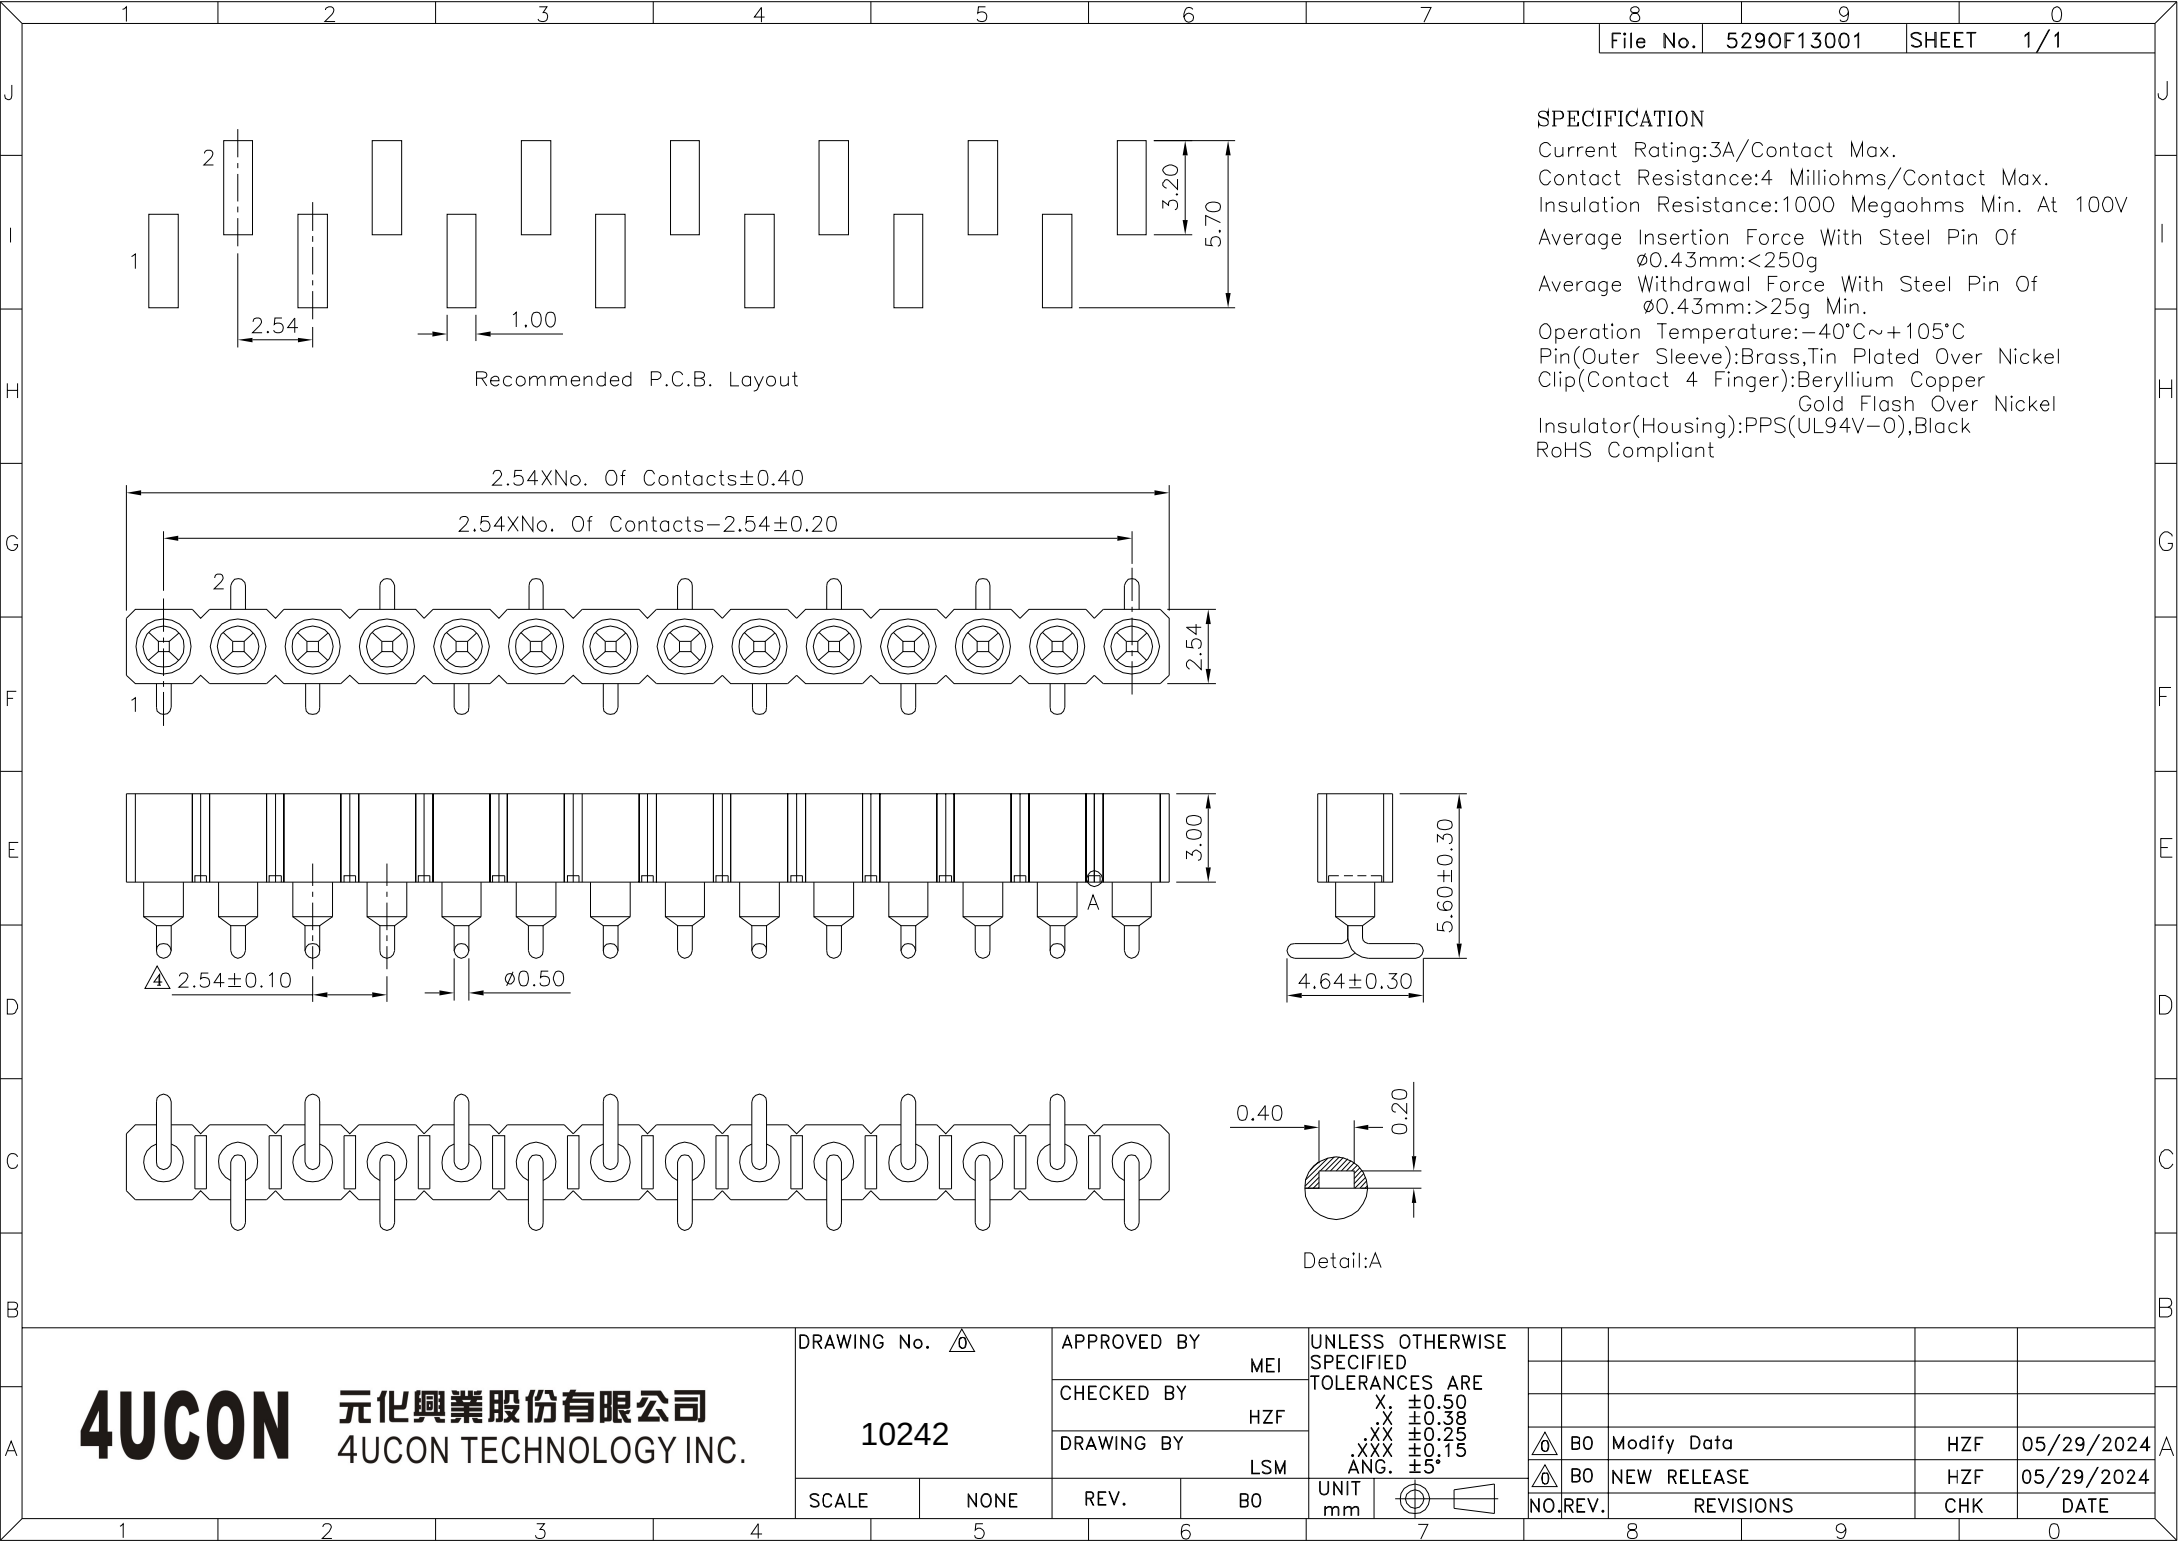

SPECIFICATION

Current Rating:3A/Contact Max.
Contact Resistance:4 Milliohms/Contact Max.
Insulation Resistance:1000 Megaohms Min. At 100V
Average Insertion Force With Steel Pin Of
 ø0.43mm:<250g
Average Withdrawal Force With Steel Pin Of
 ø0.43mm:>25g Min.
Operation Temperature:-40°C~+105°C
Pin(Outer Sleeve):Brass,Tin Plated Over Nickel
Clip(Contact 4 Finger):Beryllium Copper
 Gold Flash Over Nickel
Insulator(Housing):PPS(UL94V-0),Black
RoHS Compliant

4Ucon 元化興業股份有限公司
4Ucon TECHNOLOGY INC.

DRAWING No. <u>10</u>		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.50 X ±0.38 XX ±0.25 XXX ±0.15 ANG. ±5°					
		MEI							
		CHECKED BY							
		HZF							
		DRAWING BY							
10242		LSM			<u>10</u> B0	Modify Data	HZF	05/29/2024	
					<u>10</u> B0	NEW RELEASE	HZF	05/29/2024	
SCALE	NONE	REV.	B0	UNIT mm		NO. REV.	REVISIONS	CHK	DATE