

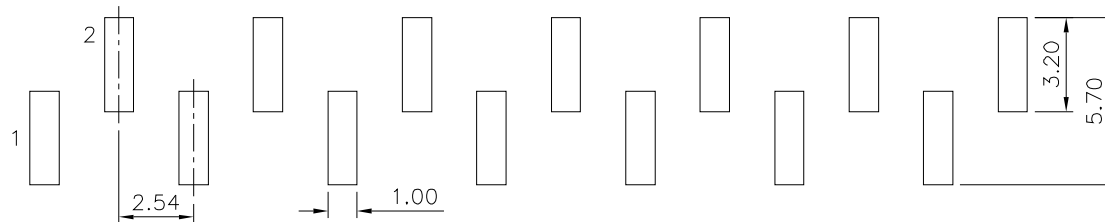

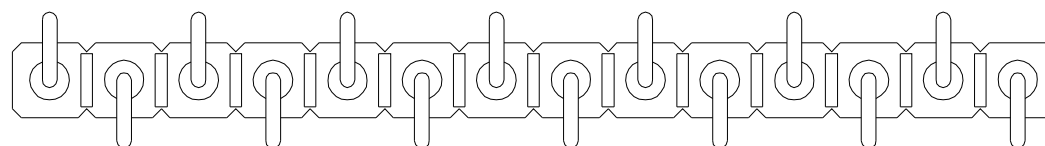



SPECIFICATION

Current Rating:3A/Contact Max.
Contact Resistance:4 Milliohms/Contact Max.
Insulation Resistance:1000 Megaohms Min. At 100V
Average Insertion Force With Steel Pin Of
 $\phi 0.43\text{mm}$:<250g
Average Withdrawal Force With Steel Pin Of
 $\phi 0.43\text{mm}$:>25g Min.
Operation Temperature:-40°C~+105°C
Pin(Outer Sleeve):Brass,Tin Plated Over Nickel
Clip(Contact 4 Finger):Beryllium Copper
Gold Flash Over Nickel
Insulator(Housing):PPS(UL94V-0),Black
RoHS Compliant

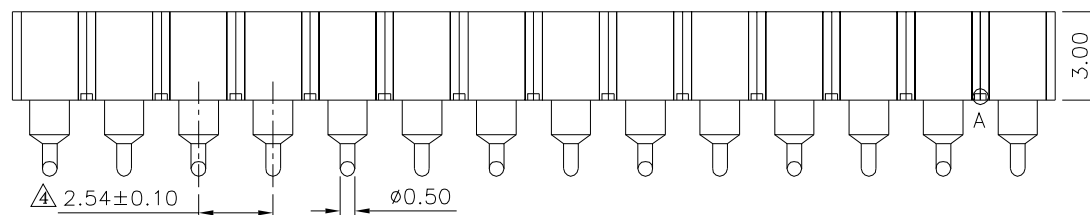

Recommended P.C.B. Layout

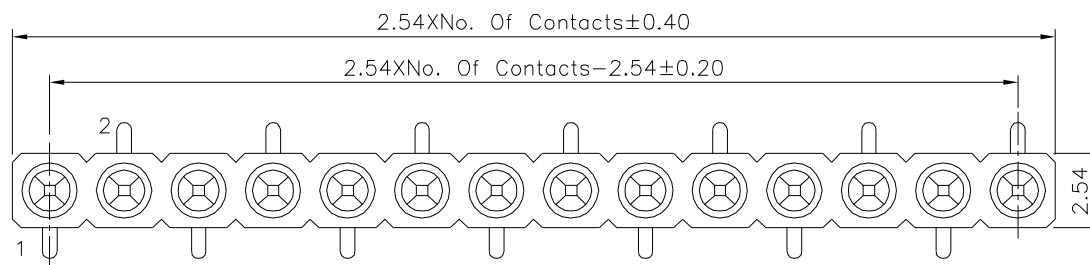

Detail:A

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

10251

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY


LSM

REV.

BO

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
X. ±0.50
XX ±0.38
XXX ±0.25
ANG. ±0.15

UNIT
mm



	BO	Modify Data		HZF	05/29/2024
	BO	NEW RELEASE		HZF	05/29/2024
NO. REV.	REVISIONS		CHK	DATE	