





△ SPECIFICATION

Current Rating: 3Amps/Contact Max.
Contact Resistance: 4 Milliohms/Contact Max.
Insulation Resistance: 1000 Megaohms Min. At 100V
Operation Voltage: 60V AC/DC
Average Insertion Force With Steel Pin Of
 $\phi 0.43\text{mm}$: <250g
Average Withdrawal Force With Steel Pin Of
 $\phi 0.43\text{mm}$: >90g Min.
Mechanical Life Cycle: 200 Min.
Operation Temperature: Gold Plated: $-55^{\circ}\text{C} \sim +105^{\circ}\text{C}$
Tin Plated: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$
Soldering Temperature: $+260^{\circ}\text{C}$, 10s Max.
Pin (Outer Sleeve): Brass, Machined CuZn38Pb2
Tin Plated Over Nickel
Clip (Contact 4 Finger): Beryllium Copper, Heat Treated
Gold Plated Over Nickel
Insulator (Housing): PPS UL94V-0, Black
RoHS Compliant

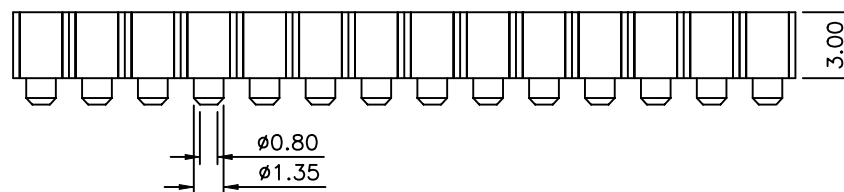

△ Recommended P.C.B. Layout

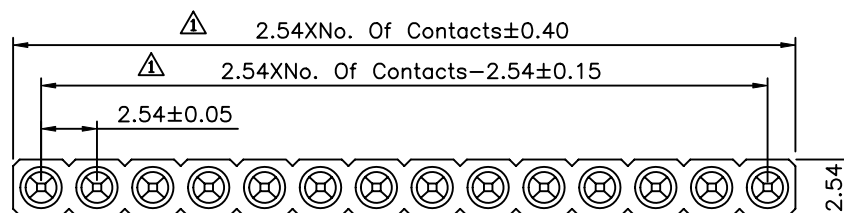

Pin Expatiate

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

10323

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

QQJ

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

X. ± 0.35
.X ± 0.20
.XX ± 0.15
.XXX ± 0.05
ANG. $\pm 5^{\circ}$

SCALE

NONE

REV.

A1

UNIT
mm

△ A1

Modify Data

HZF

01/14/2010

△ A0

NEW RELEASE

HZF

06/20/2009

NO. REV.

REVISIONS

CHK

DATE